



[SCREW TYPE TERMINAL BLOCKS]



- > Screw type terminal blocks are the featured products with complete categories and universal accessories, as well as the most popular series.
- > Screw connection is an economic connection solution and help to reduce your costs.

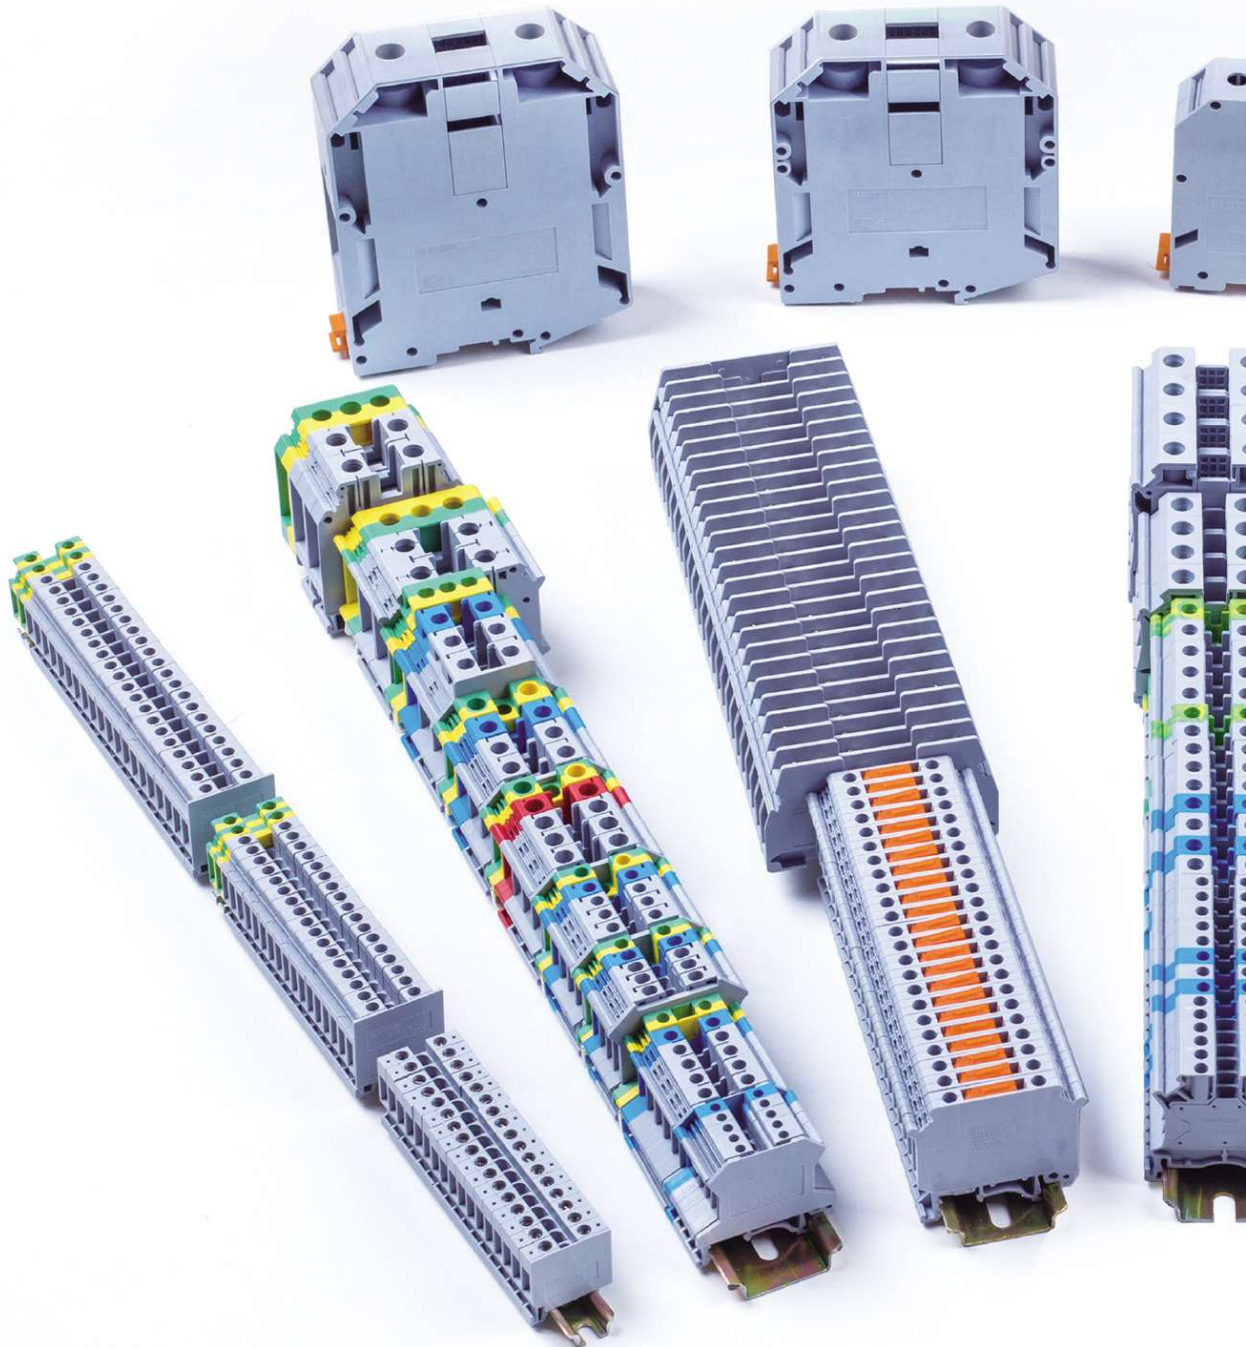

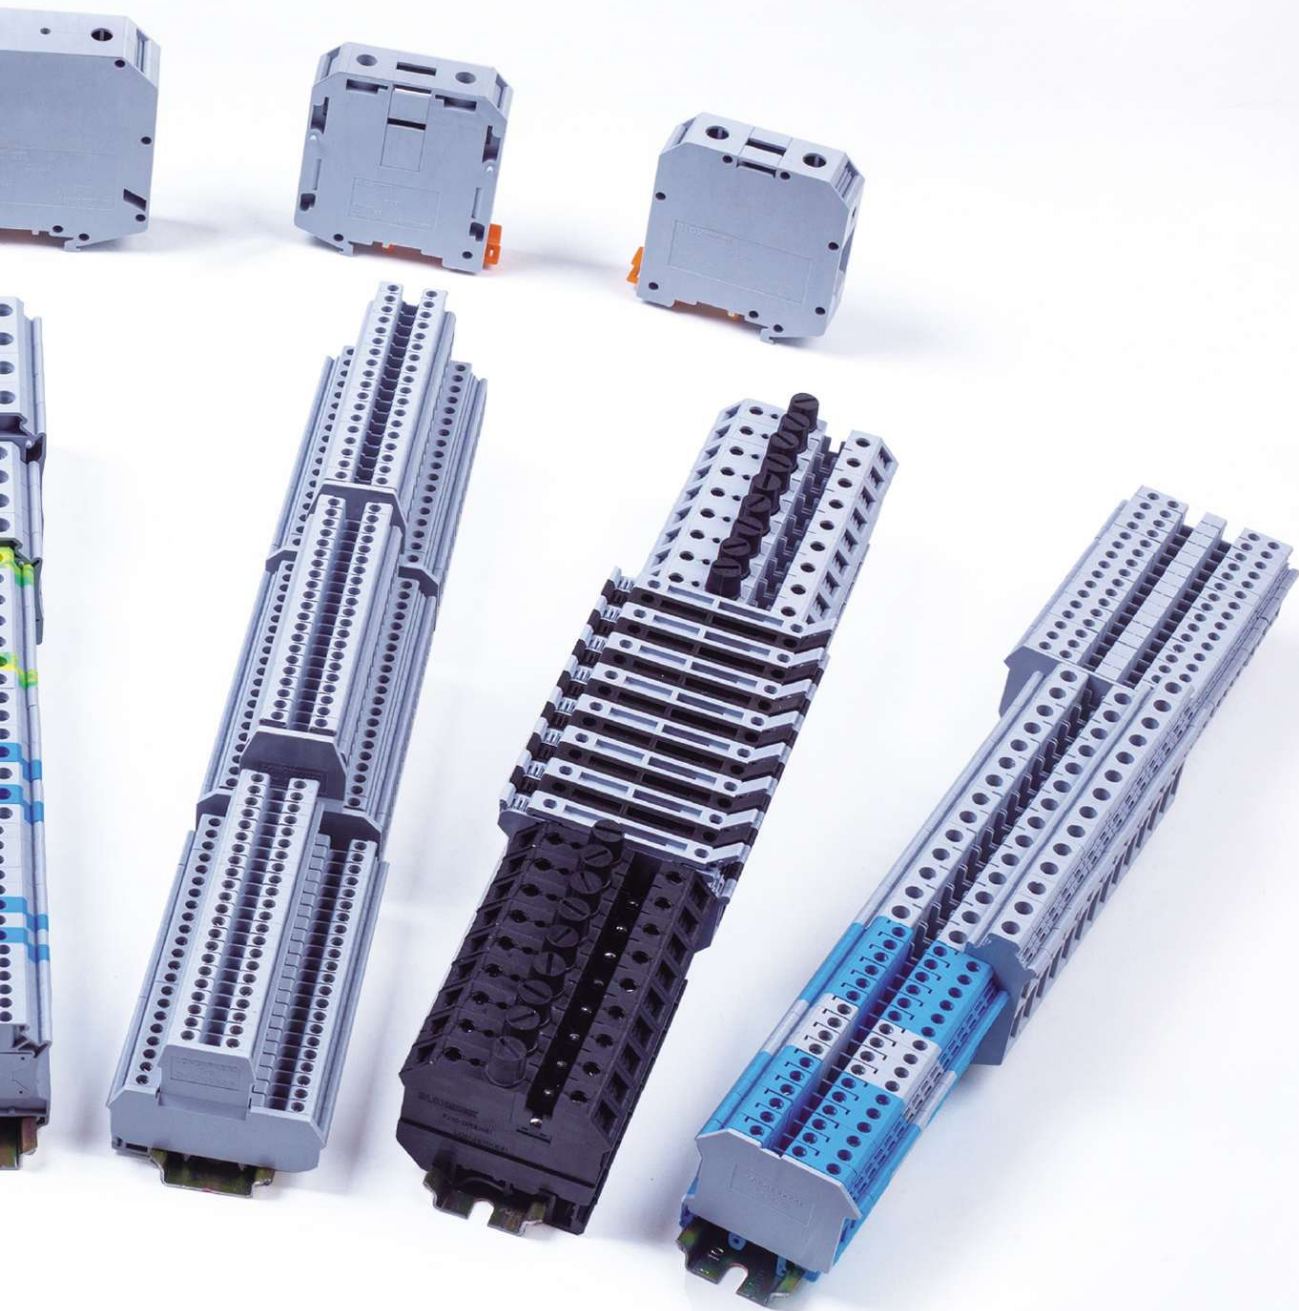

[UNIVERSAL SCREW TYPE TERMINAL BLOCKS]


Universal screw type terminal blocks, the metal parts consist of high-grade, corrosion-proof brass alloys, the insulating housings are made of recyclable nylon 66. Tightening the screw, the pressure frame rises up, the self-locking system of screws prevent the conductors from loosening in the shock environment. They are widely used in automation, electricity, transportation, energy and chemical industry etc.

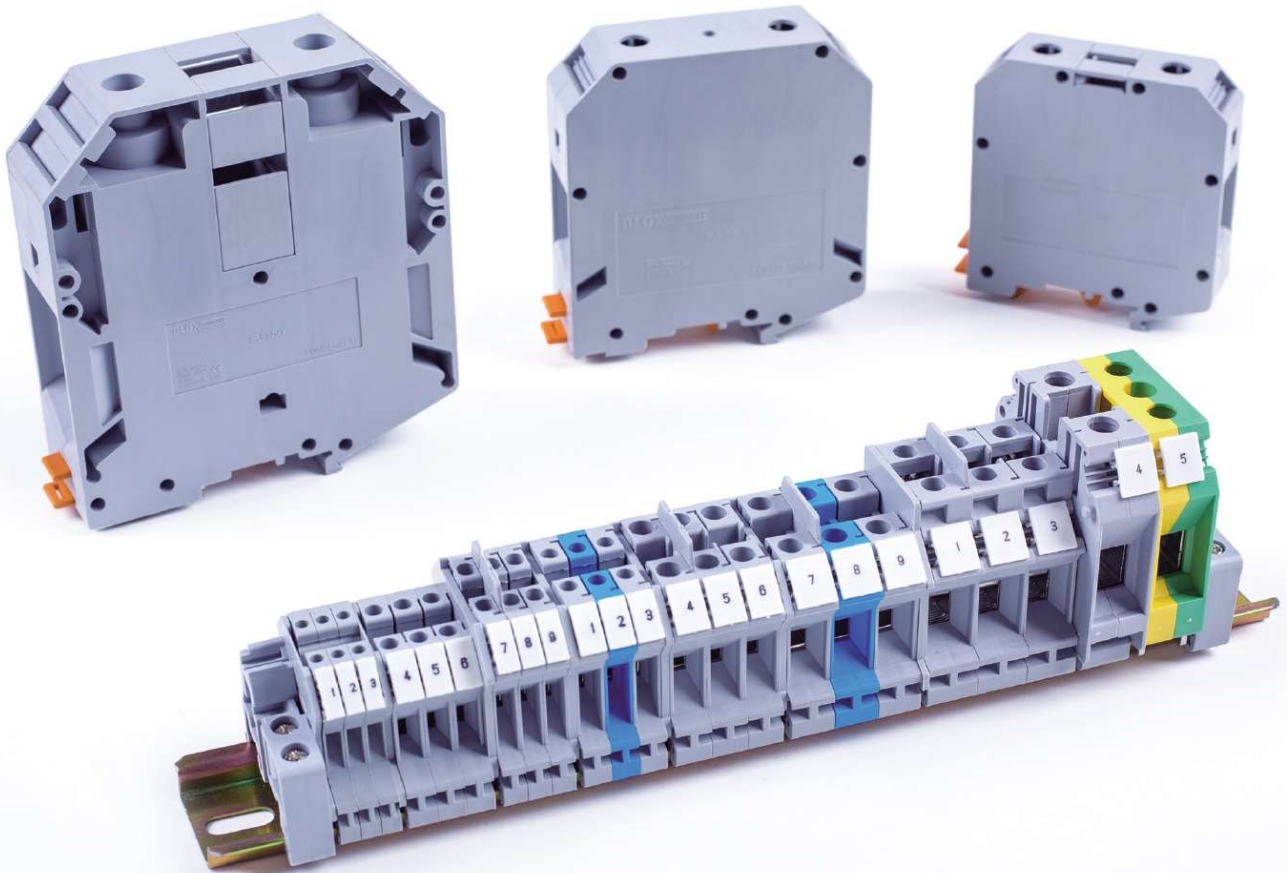

Connection of Wires



Usage of Fixed Bridge



Usage of Insertion Bridge



FJ1.5N

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	4.2x42.5x42	
Screw	M2, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	17.5	15
WIRING DATA		
Strip Length(mm)	7	
Flexible Wire(mm ²)	0.14~1.5	
Rigid Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~16	
Torque(N·m)	0.22~0.25	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	4500	

ACCESSORIES

End Plate	Model	
	D-FJ2.5	Thickness 1.5mm Pcs/Bag 100
Fixed Bridge		
	Model FBRN10-4N	Max Current 12A Pcs/Bag 20
Insertion Bridge		
—	Model -	Max Current - Pcs/Bag -
Small Partition&Partition Plate		
-	Pcs/Bag -	
ATP-FJ	Pcs/Bag	100
Marking Tag		
ZB4	Pcs/Bag	100



FJ2.5B

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x42.5x42	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	690	600
Current(A)	24	15
WIRING DATA		
Strip Length(mm)	7	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.6~0.8	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	3000	

ACCESSORIES

End Plate	Model	
	D-FJ2.5	Thickness 1.5mm Pcs/Bag 100
Fixed Bridge		
	Model FBI10-6	Max Current 25A Pcs/Bag 20
Insertion Bridge		
	Model EB10-6	Max Current 25A Pcs/Bag 10
Small Partition&Partition Plate		
TS-KK3	Pcs/Bag	200
ATP-FJ	Pcs/Bag	100
Marking Tag		
ZB6	Pcs/Bag	100



FJ3N

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x42.5x47	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	20
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.6~0.8	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	3600	

ACCESSORIES

End Plate	Model	
	D-FJ4/10	Thickness 1.8mm Pcs/Bag 100
Fixed Bridge		
	Model FBRI10-5N	Max Current 30A Pcs/Bag 20
Insertion Bridge		
	Model EBL10-5	Max Current 24A Pcs/Bag 10
Small Partition&Partition Plate		
TS-K	Pcs/Bag	200
ATP-FJ	Pcs/Bag	100
Marking Tag		
ZB5	Pcs/Bag	100



FJ5N

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x42.5x47	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	41	30
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Torque(N·m)	0.6~0.8	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	3000	

ACCESSORIES

	Model	D-FJ4/10
	Thickness	1.8mm
	Pcs/Bag	100
	Model	FBI10-6
	Max Current	41A
	Pcs/Bag	20
	Model	EB10-6
	Max Current	32A
	Pcs/Bag	10
Small Partition&Partition Plate		
TS-K	Pcs/Bag	200
ATP-FJ	Pcs/Bag	100
Marking Tag		
ZB6	Pcs/Bag	100



FJ6N

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x42.5x47	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	57	30
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	0.2~6	
Rigid Wire(mm ²)	0.2~10	
Imperial Wire(AWG)	24~8	
Torque(N·m)	1.5~1.8	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	2400	

ACCESSORIES

	Model	D-FJ4/10
	Thickness	1.8mm
	Pcs/Bag	100
	Model	FBI10-8
	Max Current	57A
	Pcs/Bag	20
	Model	EB10-8
	Max Current	57A
	Pcs/Bag	10
Small Partition&Partition Plate		
TS-K	Pcs/Bag	200
ATP-FJ	Pcs/Bag	100
Marking Tag		
ZB8	Pcs/Bag	100




FJ10N

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x42.5x47.3	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	76	65
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	0.5~10	
Rigid Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	20~6	
Torque(N·m)	1.5~1.8	
PACKING		
Pcs/Inner Box	30	
Pcs/Master Carton	1800	

ACCESSORIES

	Model	D-FJ4/10
	Thickness	1.8mm
	Pcs/Bag	100
	Model	FBI10-10
	Max Current	76A
	Pcs/Bag	20
	Model	-
	Max Current	-
	Pcs/Bag	-
Small Partition&Partition Plate		
TS-K	Pcs/Bag	200
ATP-FJ	Pcs/Bag	100
Marking Tag		
ZB10	Pcs/Bag	100



FJ16N



FJ35NL



FJ35NH

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x42.5x54	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	101	85
WIRING DATA		
Strip Length(mm)	11	
Flexible Wire(mm ²)	4~16	
Rigid Wire(mm ²)	2.5~25	
Imperial Wire(AWG)	14~4	
Torque(N·m)	1.5~1.8	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	850	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	15.2x55x51	
Screw	M6, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	125	115
WIRING DATA		
Strip Length(mm)	16	
Flexible Wire(mm ²)	0.75~35	
Rigid Wire(mm ²)	0.75~35	
Imperial Wire(AWG)	18~2	
Torque(N·m)	3.2~3.7	
PACKING		
Pcs/Inner Box	32	
Pcs/Master Carton	544	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	15.2x50.5x62	
Screw	M6, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	150	125
WIRING DATA		
Strip Length(mm)	16	
Flexible Wire(mm ²)	0.75~35	
Rigid Wire(mm ²)	0.75~50	
Imperial Wire(AWG)	18~0	
Torque(N·m)	3.2~3.7	
PACKING		
Pcs/Inner Box	28	
Pcs/Master Carton	476	

ACCESSORIES

End Plate	Model	
	D-FJ16	
	Thickness	1.5mm
	Pcs/Bag	100
Fixed Bridge	Model	FBI10-12
	Max Current	101A
	Pcs/Bag	10
Insertion Bridge	Model	-
	Max Current	-
	Pcs/Bag	-
Small Partition&Partition Plate		
TS-K	Pcs/Bag	200
ATP-FJ		100
Marking Tag		
ZB12	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
—	-	
	Thickness	-
	Pcs/Bag	-
Fixed Bridge	Model	FBI10-15
	Max Current	130A
	Pcs/Bag	10
Insertion Bridge	Model	-
	Max Current	-
	Pcs/Bag	-
Small Partition&Partition Plate		
TS-K	Pcs/Bag	200
-		-
Marking Tag		
ZB15	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
—	-	
	Thickness	-
	Pcs/Bag	-
Fixed Bridge	Model	FBI10-15
	Max Current	125A
	Pcs/Bag	10
Insertion Bridge	Model	-
	Max Current	-
	Pcs/Bag	-
Small Partition&Partition Plate		
TS-K	Pcs/Bag	200
-		-
Marking Tag		
ZB15	Pcs/Bag	100



FJ50



FJ70



FJ95

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	20x70.5x76	
Screw	M6, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	150	150
WIRING DATA		
Strip Length(mm)	24	
Flexible Wire(mm ²)	25~50	
Rigid Wire(mm ²)	16~50	
Imperial Wire(AWG)	6~0	
Torque(N·m)	6~8	
PACKING		
Pcs/Inner Box	10	
Pcs/Master Carton	200	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	20.3x70.5x80	
Screw	M8, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	1000
Current(A)	192	192
WIRING DATA		
Strip Length(mm)	24	
Flexible Wire(mm ²)	25~70	
Rigid Wire(mm ²)	16~95	
Imperial Wire(AWG)	4~00	
Torque(N·m)	8~10	
PACKING		
Pcs/Inner Box	10	
Pcs/Master Carton	150	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	25x83x90	
Screw	M8, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	232	230
WIRING DATA		
Strip Length(mm)	33	
Flexible Wire(mm ²)	35~95	
Rigid Wire(mm ²)	25~95	
Imperial Wire(AWG)	4~000	
Torque(N·m)	15~20	
PACKING		
Pcs/Inner Box	8	
Pcs/Master Carton	96	

ACCESSORIES

Fixed Bridge		
	Model	FBI2-20
	Positions	2
	Model	FBI3-20
	Positions	3
Pcs/Bag	10	
Insertion Bridge		
—	Model	-
	Positions	-
	Pcs/Bag	-
Marking Tag		
ZB10	Pcs/Bag	100

ACCESSORIES

Fixed Bridge		
	Model	FBI2-20
	Positions	2
	Model	FBI3-20
	Position	3
Pcs/Bag	10	
Insertion Bridge		
—	Model	-
	Positions	-
	Pcs/Bag	-
Marking Tag		
ZB10	Pcs/Bag	100

ACCESSORIES

Fixed Bridge		
—	Model	-
	Positions	-
	Pcs/Bag	-
Insertion Bridge		
	Model	EB2-25
	Positions	2
	Pcs/Inner Box	16
Marking Tag		
ZB15	Pcs/Bag	100



FJ150

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	31x100x112	
Screw	M10, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	309	285
WIRING DATA		
Strip Length(mm)	40	
Flexible Wire(mm ²)	50~150	
Rigid Wire(mm ²)	35~150	
Imperial Wire(AWG)	2~300kcmil	
Torque(N·m)	25~30	
PACKING		
Pcs/Inner Box	2	
Pcs/Master Carton	42	

ACCESSORIES

Fixed Bridg		
—	Model	-
	Positions	-
	Pcs/Bag	-
Insertion Bridge		
—	Model	-
	Positions	-
	Pcs/Bag	-
Marking Tag		
ZB15	Pcs/Bag	100



FJ240

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	36x100x124.5	
Screw	M10, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	415	380
WIRING DATA		
Strip Length(mm)	40	
Flexible Wire(mm ²)	70~240	
Rigid Wire(mm ²)	70~240	
Imperial Wire(AWG)	00~500kcmil	
Torque(N·m)	25~30	
PACKING		
Pcs/Inner Box	2	
Pcs/Master Carton	42	

ACCESSORIES

Fixed Bridge		
—	Model	-
	Positions	-
	Pcs/Bag	-
Insertion Bridge		
—	Model	-
	Positions	-
	Pcs/Bag	-
Marking Tag		
ZB15	Pcs/Bag	100



FJ1.5N/D



FJ2.5B/D



FJ3N/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	4.2x42.5x42	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	17.5	-
WIRING DATA		
Strip Length(mm)	7	
Flexible Wire(mm ²)	0.14~1.5	
Rigid Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~16	
Clamping Screw:	M2/0.22~0.25	
Thread/Torque(N·m)		
Fixing Screw:	M2/0.22~0.25	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	2250	
Marking Tag		
ZB4	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x42.5x42	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	24	-
WIRING DATA		
Strip Length(mm)	7	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Clamping Screw:	M3/0.6~0.8	
Thread/Torque(N·m)		
Fixing Screw:	M3/0.6~0.8	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	1700	
Marking Tag		
ZB6	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x42.5x47	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	32	-
WIRING DATA		
Strip Length(mm)	7	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Clamping Screw:	M3/0.6~0.8	
Thread/Torque(N·m)		
Fixing Screw:	M2.5/0.5~0.6	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1800	
Marking Tag		
ZB5	Pcs/Bag	100



FJ5N/D



FJ6N/D



FJ10N/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x42.5x47	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	41	-
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Clamping Screw:	M3/0.6~0.8	
Thread/Torque(N·m)		
Fixing Screw:	M3/0.6~0.8	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	1700	
Marking Tag		
ZB6	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x42.5x47	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	57	-
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	0.2~6	
Rigid Wire(mm ²)	0.2~10	
Imperial Wire(AWG)	24~8	
Clamping Screw:	M4/1.5~1.8	
Thread/Torque(N·m)		
Fixing Screw:	M4/1.5~1.8	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	1200	
Marking Tag		
ZB8	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x42.5x47.3	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	76	-
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	0.5~10	
Rigid Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	24~6	
Clamping Screw:	M4/1.5~1.8	
Thread/Torque(N·m)		
Fixing Screw:	M4/1.5~1.8	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	30	
Pcs/Master Carton	1020	
Marking Tag		
ZB10	Pcs/Bag	100



FJ16N/D



FJ35NL/D



FJ35NH/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x42.5x54	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	101	-
WIRING DATA		
Strip Length(mm)	11	
Flexible Wire(mm ²)	4~16	
Rigid Wire(mm ²)	2.5~25	
Imperial Wire(AWG)	14~4	
Clamping Screw:	M4/1.5~1.8	
Thread/Torque(N·m)		
Fixing Screw:	M4/1.5~1.8	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	850	
Marking Tag		
ZB12	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	15.2x55x51	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	125	-
WIRING DATA		
Strip Length(mm)	16	
Flexible Wire(mm ²)	0.75~35	
Rigid Wire(mm ²)	0.75~35	
Imperial Wire(AWG)	18~2	
Clamping Screw:	M6/3.2~3.7	
Thread/Torque(N·m)		
Fixing Screw:	M5/2.5~3	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	32	
Pcs/Master Carton	544	
Marking Tag		
ZB15	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	15x50x62	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	150	-
WIRING DATA		
Strip Length(mm)	15	
Flexible Wire(mm ²)	0.75~35	
Rigid Wire(mm ²)	0.75~50	
Imperial Wire(AWG)	18~0	
Clamping Screw:	M6/3.2~3.7	
Thread/Torque(N·m)		
Fixing Screw:	M5/2.5~3	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	24	
Pcs/Master Carton	408	
Marking Tag		
ZB15	Pcs/Bag	100



FJ50N/D



FJ70N/D



FJ95N/D


CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	20x70.5x76	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	150	-
WIRING DATA		
Strip Length(mm)	24	
Flexible Wire(mm ²)	25~50	
Rigid Wire(mm ²)	16~50	
Imperial Wire(AWG)	6~0	
Clamping Screw:	M6/6~8	
Thread/Torque(N·m)		
Fixing Screw:	M6/6~8	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	10	
Pcs/Master Carton	200	
Marking Tag		
ZB10	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	20.3x70.5x80	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	192	-
WIRING DATA		
Strip Length(mm)	24	
Flexible Wire(mm ²)	25~70	
Rigid Wire(mm ²)	16~95	
Imperial Wire(AWG)	4~00	
Clamping Screw:	M8/8~10	
Thread/Torque(N·m)		
Fixing Screw:	M8/8~10	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	10	
Pcs/Master Carton	150	
Marking Tag		
ZB10	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	25x83x90	
Screw	Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	232	-
WIRING DATA		
Strip Length(mm)	33	
Flexible Wire(mm ²)	35~95	
Rigid Wire(mm ²)	25~95	
Imperial Wire(AWG)	4~000	
Clamping Screw:	M8/15~20	
Thread/Torque(N·m)		
Fixing Screw:	M8/15~20	
Thread/Torque(N·m)		
PACKING		
Pcs/Inner Box	8	
Pcs/Master Carton	96	
Marking Tag		
ZB15	Pcs/Bag	100

[CLOSED SCREW TYPE TERMINAL BLOCKS]

Closed screw type terminal blocks are Bloxconnect's patented products. It has double-face closed design, in this way users don't need end plates anymore which can save a lot of costs. Meanwhile, the closed design is able to prevent the inner metal parts from dusts during transportation and installation, directly improved the electrical performances.

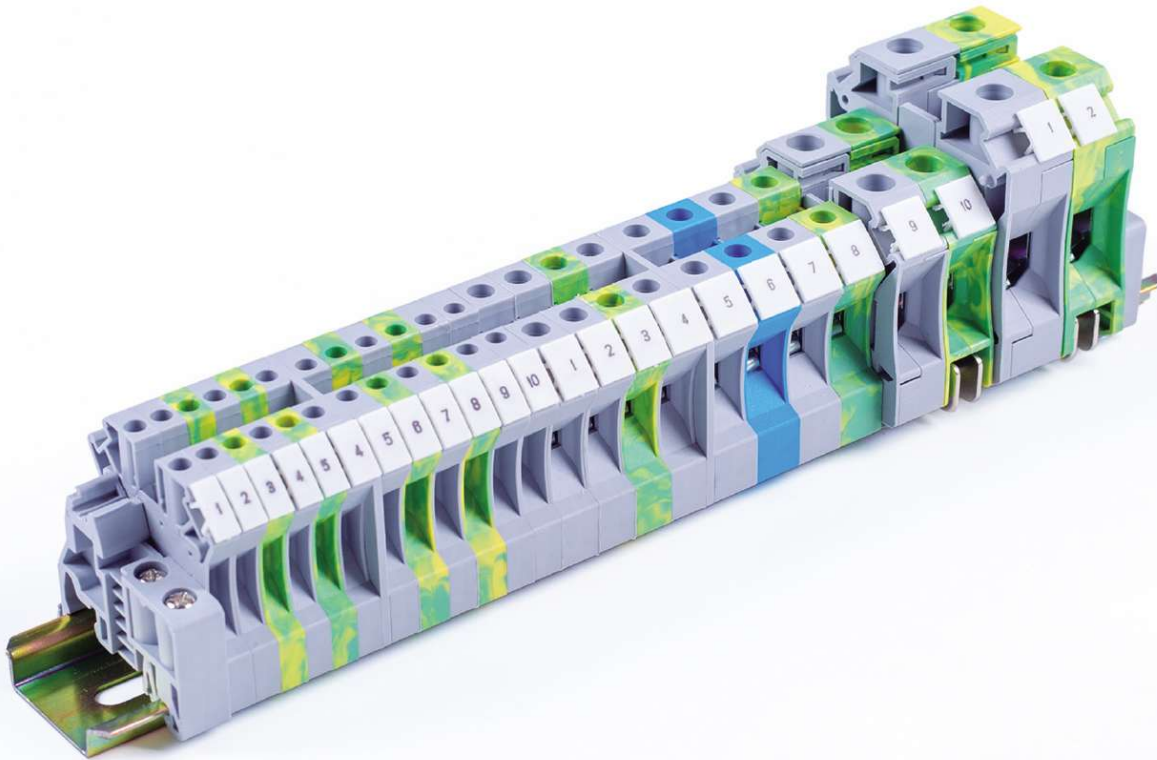

Removable Covers



FJ3NE



FJ5NE



FJ6NE

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x42.5x47	
Screw	M2.5, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.5~2.5	
Rigid Wire(mm ²)	0.5~4	
Imperial Wire(AWG)	20~12	
Torque(N·m)	0.4~0.5	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	3600	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x42.5x47	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	30
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.5~4	
Rigid Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~10	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	3000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x42.5x47	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	41	50
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	1.5~6	
Rigid Wire(mm ²)	1.5~6	
Imperial Wire(AWG)	16~8	
Torque(N·m)	1.4~1.5	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	2400	

ACCESSORIES

Partition Plate	Model	ATP-NE
	Thickness	1.5mm
	Pcs/Bag	100
Fixed Bridge	Model	FBI10-5N
	Max Current	24A
	Pcs/Bag	20
Insertion Bridge	Model	EBL10-5
	Max Current	24A
	Pcs/Bag	10
Marking Tag	ZB5	Pcs/Bag 100

ACCESSORIES

Partition Plate	Model	ATP-NE
	Thickness	1.5mm
	Pcs/Bag	100
Fixed Bridge	Model	FBI10-6
	Max Current	30A
	Pcs/Bag	20
Insertion Bridge	Model	EB10-6
	Max Current	30A
	Pcs/Bag	10
Marking Tag	ZB6	Pcs/Bag 100

ACCESSORIES

Partition Plate	Model	ATP-NE
	Thickness	1.5mm
	Pcs/Bag	100
Fixed Bridge	Model	FBI10-8
	Max Current	38A
	Pcs/Bag	20
Insertion Bridge	Model	EB10-8
	Max Current	35A
	Pcs/Bag	10
Marking Tag	ZB8	Pcs/Bag 100



FJ10NE



FJ16NE



FJ35NE

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x42.5x47	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	57	65
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	1.5~10	
Rigid Wire(mm ²)	1.5~16	
Imperial Wire(AWG)	16~6	
Torque(N·m)	1.4~1.5	
PACKING		
Pcs/Inner Box	30	
Pcs/Master Carton	1800	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x51x50.5	
Screw	M5, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	-
Current(A)	76	-
WIRING DATA		
Strip Length(mm)	12	
Flexible Wire(mm ²)	6~16	
Rigid Wire(mm ²)	6~16	
Imperial Wire(AWG)	10~4	
Torque(N·m)	2.5~3	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	1000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	16x54.4x62.1	
Screw	M6, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	-
Current(A)	125	-
WIRING DATA		
Strip Length(mm)	16	
Flexible Wire(mm ²)	10~35	
Rigid Wire(mm ²)	10~35	
Imperial Wire(AWG)	8~2	
Torque(N·m)	3.2~3.7	
PACKING		
Pcs/Inner Box	24	
Pcs/Master Carton	408	

ACCESSORIES

Partition Plate	Model	
	ATP-NE	
	Thickness	1.5mm
	Pcs/Bag	100
Fixed Bridge		
	FBI10-10	
	Max Current	57A
	Pcs/Bag	20
Insertion Bridge		
	Model	-
	Max Current	-
	Pcs/Bag	-
Marking Tag		
ZB10	Pcs/Bag	100

ACCESSORIES

Partition Plate	Model	
	-	
	Thickness	-
	Pcs/Bag	-
Fixed Bridge		
	FBI10-12	
	Max Current	76A
	Pcs/Bag	10
Insertion Bridge		
	Model	-
	Max Current	-
	Pcs/Bag	-
Marking Tag		
ZB10	Pcs/Bag	100

ACCESSORIES

Partition Plate	Model	
	-	
	Thickness	-
	Pcs/Bag	-
Fixed Bridge		
	FBI10-16	
	Max Current	125A
	Pcs/Bag	10
Insertion Bridge		
	Model	-
	Max Current	-
	Pcs/Bag	-
Marking Tag		
ZB10	Pcs/Bag	100



FJ3NE/D



FJ5NE/D



FJ6NE/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x42.5x47	
Screw	M2.5, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	24	-
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.5~2.5	
Rigid Wire(mm ²)	0.5~4	
Imperial Wire(AWG)	20~12	
Torque(N·m)	0.4~0.5	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	3600	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x42.5x47	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	32	-
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.5~4	
Rigid Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~10	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	3000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x42.5x47	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	41	-
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	1.5~6	
Rigid Wire(mm ²)	1.5~6	
Imperial Wire(AWG)	16~8	
Torque(N·m)	1.4~1.5	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	1200	




FJ10NE/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x42.5x47	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	57	-
WIRING DATA		
Strip Length(mm)	10	
Flexible Wire(mm ²)	1.5~10	
Rigid Wire(mm ²)	1.5~16	
Imperial Wire(AWG)	16~6	
Torque(N·m)	1.4~1.5	
PACKING		
Pcs/Inner Box	30	
Pcs/Master Carton	1800	




FJ16NE/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x51x50.5	
Screw	M5, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	76	-
WIRING DATA		
Strip Length(mm)	12	
Flexible Wire(mm ²)	6~16	
Rigid Wire(mm ²)	6~16	
Imperial Wire(AWG)	10~4	
Torque(N·m)	2.5~3	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	625	



FJ35NE/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	16x54.4x62.1	
Screw	M6, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	125	-
WIRING DATA		
Strip Length(mm)	16	
Flexible Wire(mm ²)	10~35	
Rigid Wire(mm ²)	10~35	
Imperial Wire(AWG)	8~2	
Torque(N·m)	3.2~3.7	
PACKING		
Pcs/Inner Box	24	
Pcs/Master Carton	408	

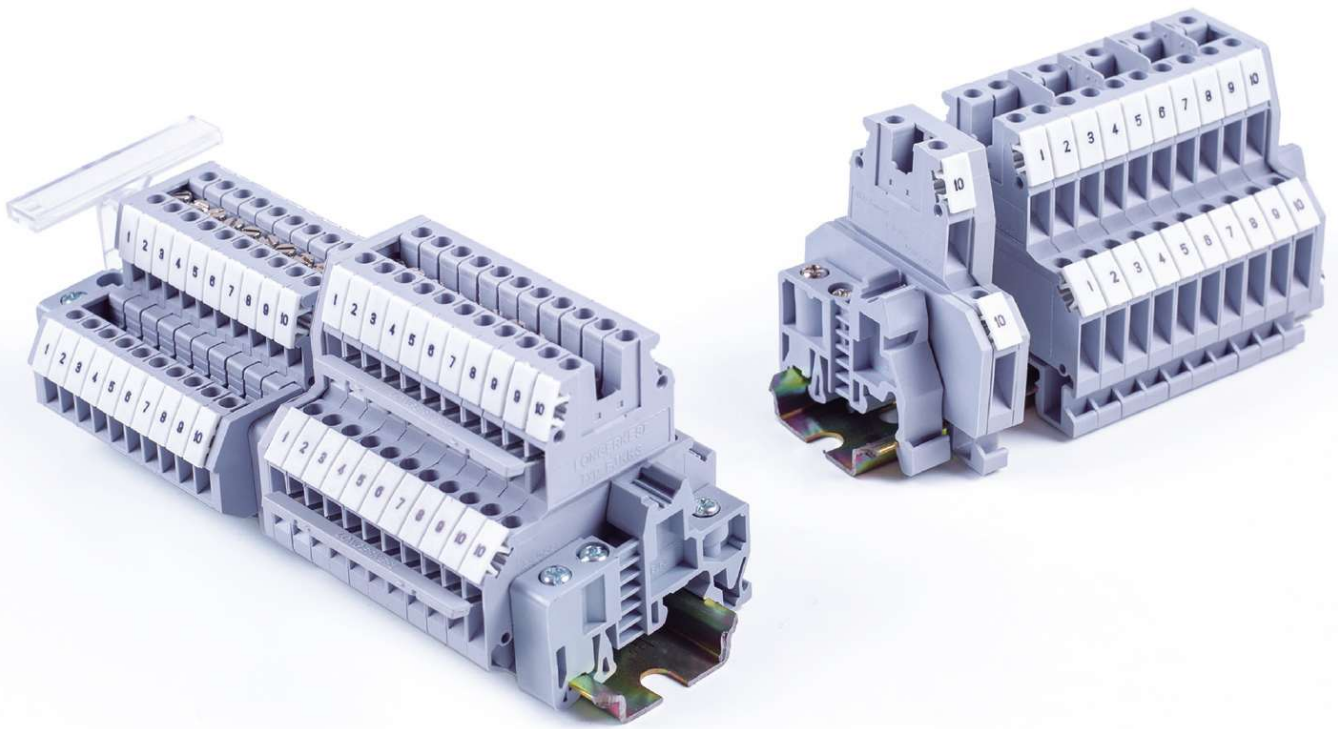

[DOUBLE DECK SCREW TYPE TERMINAL BLOCKS]

Allow four conductors to be connected on two independent potentials. The upper level is offset laterally by half of the terminal blocks thickness, this provides better visibility to the lower markers and connection points.



FJKKB2.5

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x62x48	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	CSA
Voltage(V)	500	300
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	7	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	2400	

ACCESSORIES

End Plate	Model	D-FJKKB2.5
	Thickness	2.2mm
	Pcs/Bag	100
Fixed Bridge		
	Model	FBRNI10-5N
	Max Current	22A
	Pcs/Bag	20
Insertion Bridge		
	Model	EB10-5
	Max Current	20A
	Pcs/Bag	10
Small Partition&Spacer Plate		
TS-KK3	Pcs/Bag	200
DP-FJKKB2.5	Pcs/Bag	100
Marking Tag		
ZB5	Pcs/Bag	100



FJKK3

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x56x62	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	CSA
Voltage(V)	500	300
Current(A)	32	25
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	2000	

ACCESSORIES

End Plate	Model	D-FJKK3/5
	Thickness	2.5mm
	Pcs/Bag	100
Fixed Bridge		
	Model	FBRNI10-5N
	Max Current	28A
	Pcs/Bag	20
Insertion Bridge		
	Model	EBL10-5
	Max Current	22A
	Pcs/Bag	10
Small Partition&Spacer Plate		
TS-KK3	Pcs/Bag	200
DG-FJKK3/5	Pcs/Bag	100
DP-FJKK3/5	Pcs/Bag	100
Marking Tag		
ZB5	Pcs/Bag	100



FJKK5


CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x56x62	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	CSA
Voltage(V)	500	300
Current(A)	32	25
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.6~0.8	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	1600	

ACCESSORIES

End Plate	Model	D-FJKK3/5
	Thickness	2.5mm
	Pcs/Bag	100
Fixed Bridge		
	Model	FBI10-6
	Max Current	32A
	Pcs/Bag	20
Insertion Bridge		
	Model	EB10-6
	Max Current	28A
	Pcs/Bag	10
Small Partition&Spacer Plate		
TS-KK3	Pcs/Bag	200
DG-FJKK3/5	Pcs/Bag	100
DP-FJKK3/5	Pcs/Bag	100
Marking Tag		
ZB6	Pcs/Bag	100

[FOUR-CONDUCTOR TERMINAL BLOCKS]

Are available to accommodate four conductors on one potential, the potential branches two connection points on each side.

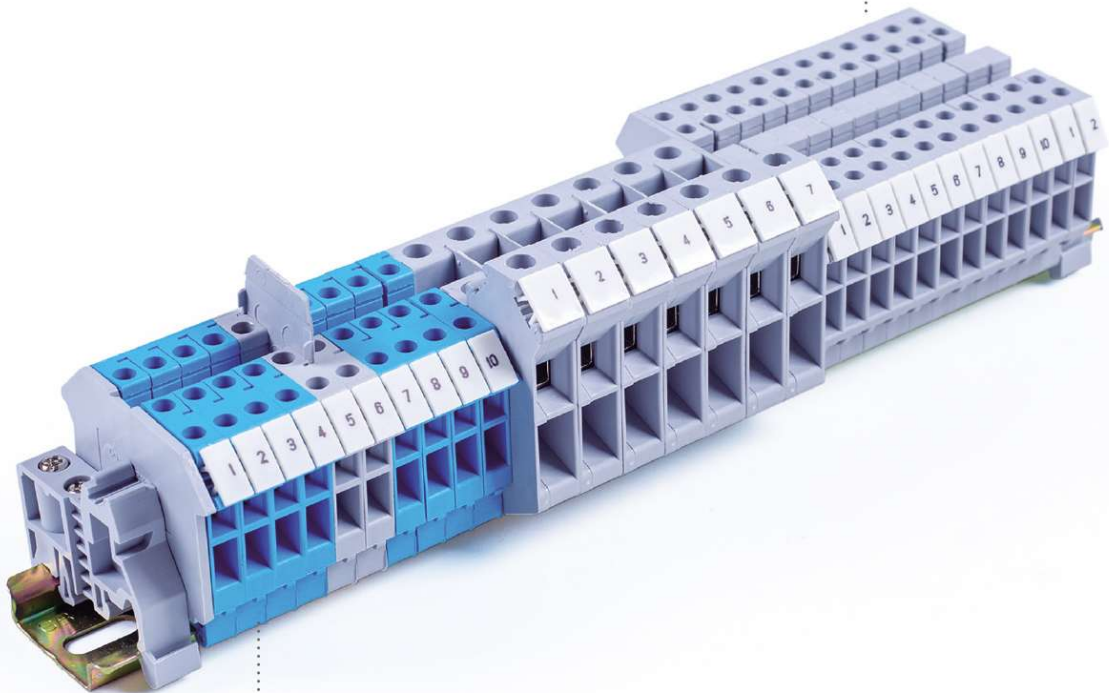

[THREE-CONDUCTOR TERMINAL BLOCKS]

Have two separate connection points on the current output side. It can be aligned in rows with neighboring universal screw type terminal blocks.



FJ-5TWIN



FJ-10TWIN



FJK4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x50.5x47	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL1059
Voltage(V)	500	350
Current(A)	32	30
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.6~0.8	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	2400	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x56.5x59	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	76	65
WIRING DATA		
Strip Length(mm)	11	
Flexible Wire(mm ²)	0.5~10	
Rigid Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	20~6	
Torque(N·m)	1.5~1.8	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	680	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x63.5x47	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	630	600
Current(A)	32	30
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	35	
Pcs/Master Carton	2100	

ACCESSORIES


End Plate	Model	D-FJ-5TWIN
	Thickness	2mm
	Pcs/Bag	100
Fixed Bridge	Model	FBI10-6
	Max Current	32A
	Pcs/Bag	20
Insertion Bridge	Model	EB10-6
	Max Current	32A
	Pcs/Bag	10
Small Partition		
TS-KK3	Pcs/Bag	200
Marking Tag		
ZB6	Pcs/Bag	100

ACCESSORIES

End Plate	Model	-
	Thickness	-
	Pcs/Bag	-
Fixed Bridge	Model	FBI10-10
	Max Current	76A
	Pcs/Bag	20
Insertion Bridge	Model	-
	Max Current	-
	Pcs/Bag	-
Small Partition		
TS-KK3	Pcs/Bag	200
Marking Tag		
ZB10	Pcs/Bag	100

ACCESSORIES

End Plate	Model	D-FJK4
	Thickness	1.5mm
	Pcs/Bag	100
Fixed Bridge	Model	FBI10-6
	Max Current	32A
	Pcs/Bag	20
Insertion Bridge	Model	EB10-6
	Max Current	26A
	Pcs/Bag	10
Small Partition		
TS-KK3	Pcs/Bag	200
Marking Tag		
ZB6	Pcs/Bag	100

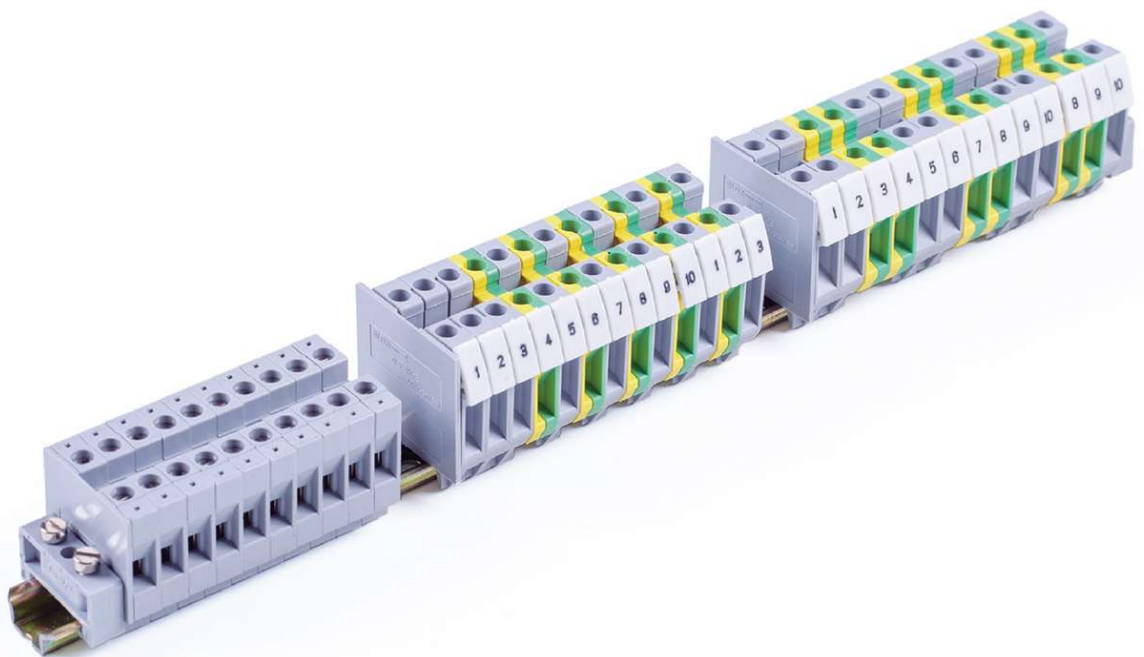

[MINI SCREW TYPE TERMINAL BLOCKS]




Adopt compact design, can be mounted on 15 mm rails, effectively saved installation space. They are very popular in small control boxes or panels. Standard connection accessories are also available for this series terminals.



FBK2.5/E

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x24.5x26.5	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	250	300
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	7	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~2.5	
Imperial Wire(AWG)	24~14	
Torque(N·m)	0.6~0.8	
PACKING		
Pcs/Inner Box	165	
Pcs/Master Carton	4620	

ACCESSORIES




End Plate		
	Model	D-FBK2.5/E
	Thickness	1.2mm
	Pcs/Bag	100
Fixed Bridge		
	Model	FBRNI10-5N
	Max Current	24A
	Pcs/Bag	20
Insertion Bridge		
	Model	EB10-5
	Max Current	22A
	Pcs/Bag	10
Partition Plate		
ATP-FBK	Pcs/Bag	100
Marking Tag		
-	Pcs/Bag	-



FBK3/E-Z

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x29x31.8	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	-
Current(A)	32	-
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~2.5	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.6~0.8	
PACKING		
Pcs/Inner Box	150	
Pcs/Master Carton	4200	

ACCESSORIES




End Plate		
	Model	D-FBKE
	Thickness	1.2mm
	Pcs/Bag	100
Fixed Bridge		
	Model	FBR110-5N
	Max Current	32A
	Pcs/Bag	20
Insertion Bridge		
	Model	EBL10-5
	Max Current	26A
	Pcs/Bag	10
Small Partition&Partition Plate		
TS-KK3	Pcs/Bag	200
ATP-FBK	Pcs/Bag	100
Marking Tag		
ZB5	Pcs/Bag	100



FBK5/E-Z

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x28x31.8	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	-
Current(A)	41	-
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	125	
Pcs/Master Carton	3500	

ACCESSORIES

End Plate		
	Model	D-FBKE
	Thickness	1.2mm
	Pcs/Bag	100
Fixed Bridge		
	Model	FBI10-6
	Max Current	41A
	Pcs/Bag	20
Insertion Bridge		
	Model	EB10-6
	Max Current	32A
	Pcs/Bag	10
Small Partition&Partition Plate		
TS-KK3	Pcs/Bag	200
ATP-FBK	Pcs/Bag	100
Marking Tag		
ZB6	Pcs/Bag	100



FBK3/E-Z-PE

CERTIFICATION		CB/CE/UKCA/RoHS	
MATERIAL			
Size(mm)	5.2x29x31.8		
Screw	M3, Zinc-Coated Steel		
Pressure Frame	Tin-Coated Brass		
Conductor	Tin-Coated Brass		
Housing	PA66/V-0		
ELECTRICAL DATA			
Standards	IEC 60947-7-2	UL1059	
Voltage(V)	-	-	
Current(A)	32	-	
WIRING DATA			
Strip Length(mm)	8		
Flexible Wire(mm ²)	0.2~2.5		
Rigid Wire(mm ²)	0.2~4		
Imperial Wire(AWG)	24~12		
Torque(N·m)	0.6~0.8		
PACKING			
Pcs/Inner Box	108		
Pcs/Master Carton	3024		
Marking Tag			
ZB5	Pcs/Bag	100	




FBK5/E-Z-PE

CERTIFICATION		CB/CE/UKCA/RoHS	
MATERIAL			
Size(mm)	6.2x28x31.8		
Screw	M3, Zinc-Coated Steel		
Pressure Frame	Tin-Coated Brass		
Conductor	Tin-Coated Brass		
Housing	PA66/V-0		
ELECTRICAL DATA			
Standards	IEC 60947-7-2	UL1059	
Voltage(V)	-	-	
Current(A)	41	-	
WIRING DATA			
Strip Length(mm)	8		
Flexible Wire(mm ²)	0.2~4		
Rigid Wire(mm ²)	0.2~6		
Imperial Wire(AWG)	24~10		
Torque(N·m)	0.5~0.6		
PACKING			
Pcs/Inner Box	90		
Pcs/Master Carton	2520		
Marking Tag			
ZB6	Pcs/Bag	100	

[LEVER-TYPE FUSE TERMINAL BLOCKS]

The hinged disconnect levers are with limit stop for fine fuses, this is available with a light indicator which signalizes when the fuse blows.

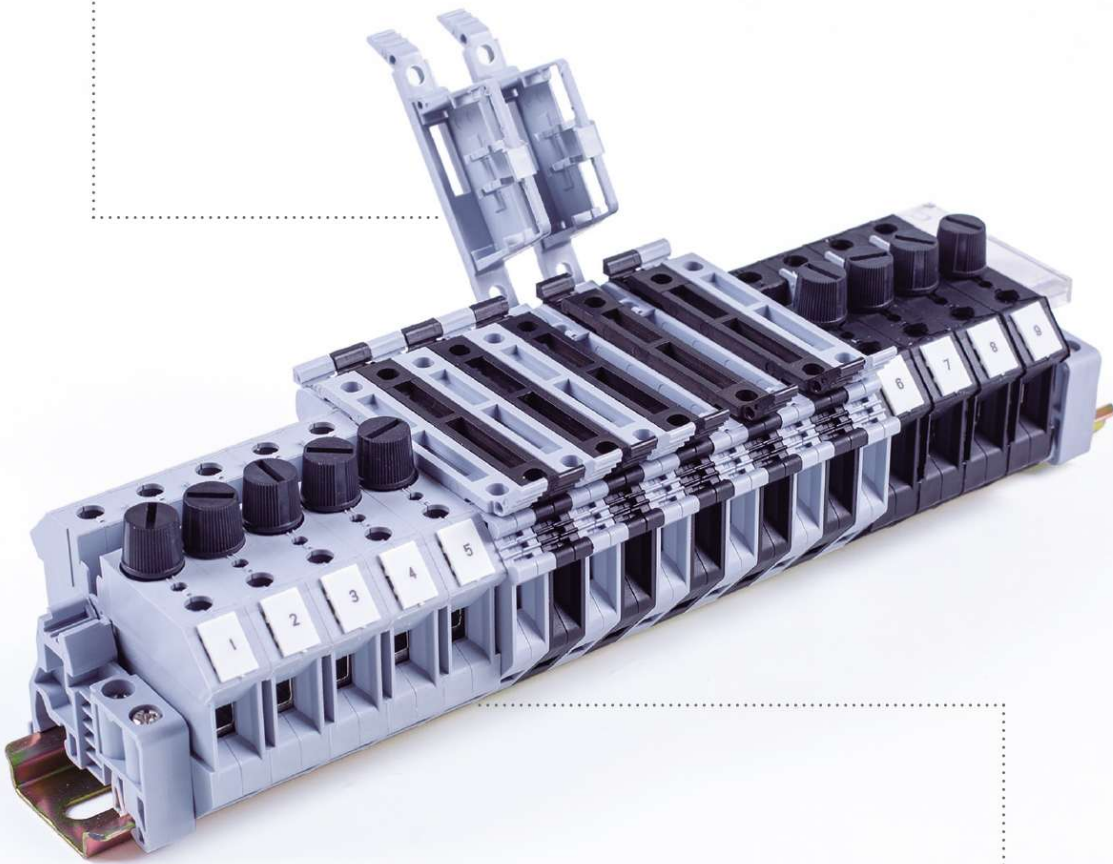

[SCREW-CAP FUSE TERMINAL BLOCKS]

The fuses are inserted in the terminal blocks together with the screw cap, are available with and without light indicator.



①Electrical Data Depends on Fuses

FJ-4HESI

FJ-5HESI

FJ-10DREHSI

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x58x45	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-3	CSA
Max Voltage(V)	500①	600
Max Current(A)	6.3①	6.3
WIRING DATA		
Fuse Type	G / 5 x 20	
Strip Length(mm)	9	
Flexible Wire(mm ²)	0.5~4	
Rigid Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~10	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	52	
Pcs/Master Carton	1768	

ACCESSORIES

End Plate	Model	D-4HESI
	Thickness	2.2mm
	Pcs/Bag	100
Marking Tag		
ZB8	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x72.5x56.5	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-3	CSA
Max Voltage(V)	800①	600
Max Current(A)	6.3①	6.3
WIRING DATA		
Fuse Type	G / 5 x 20 / 5 x 25 / 5 x 30	
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Torque(N·m)	0.5~0.8	
PACKING		
Pcs/Inner Box	45	
Pcs/Master Carton	765	

ACCESSORIES

Fixed Bridge	Model	-
	Max Current	-
	Pcs/Bag	-
Marking Tag		
ZB8	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12x62x57.2	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-3	CSA
Max Voltage(V)	500①	300
Max Current(A)	10①	20
WIRING DATA		
Fuse Type	G / 5 x 20	
Strip Length(mm)	11	
Flexible Wire(mm ²)	0.5~16	
Rigid Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	20~6	
Torque(N·m)	1.5~1.8	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	800	

ACCESSORIES


Fixed Bridge	Model	FBI10-12
	Max Current	63A
	Pcs/Bag	10
Marking Tag		
ZB8	Pcs/Bag	100

[KNIFE DISCONNECT TERMINAL BLOCKS]

Knife disconnect terminal blocks are easy to rapidly localize faults and to permit inspection work to be carried out under zero voltage conditions, widely used in measurement, regulation and control systems.

[TEST TERMINAL BLOCKS]


Test terminal blocks have one disconnect slide and two auxiliary test points, make all relevant test connections in current transducer secondary circuits extraordinarily easy to use.

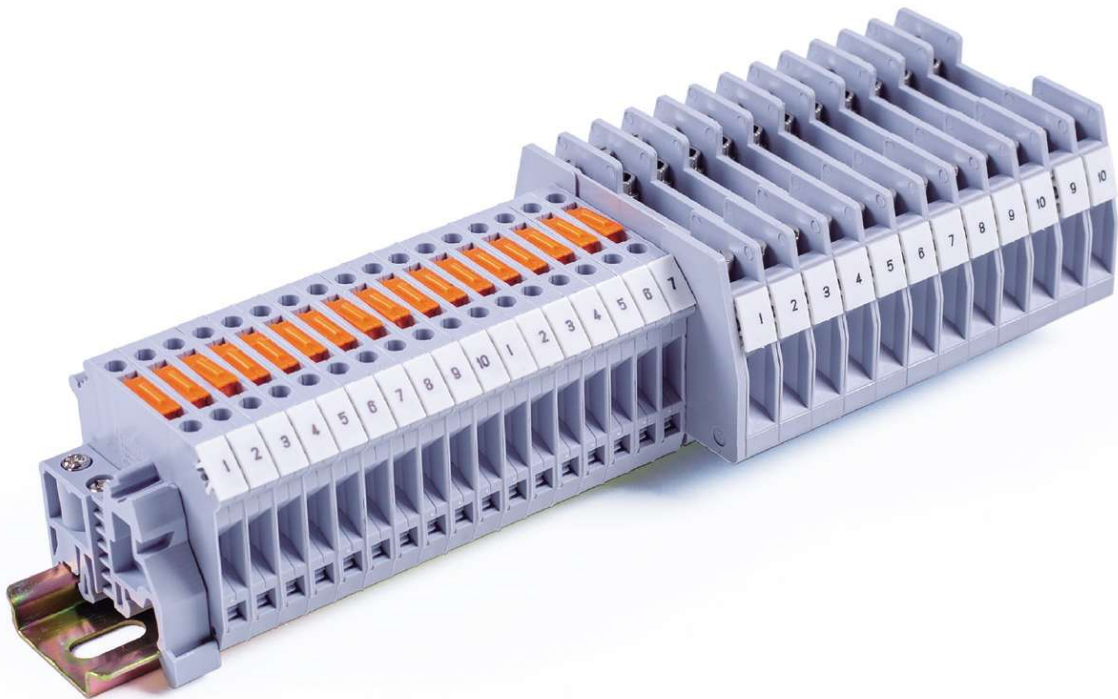

Knife Disconnect Terminal Blocks



Test Terminal Blocks

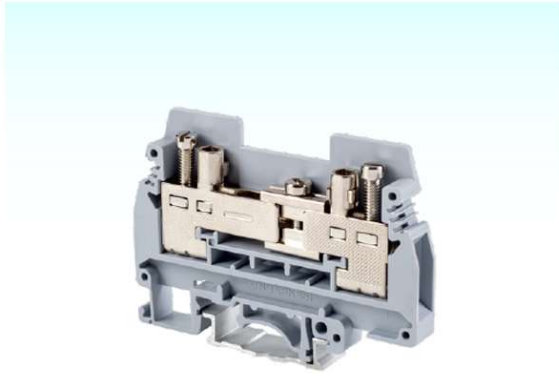

FJTK/S

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x72x51.5	
Screw	M4, Nickel-Coated Brass	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	400	300
Current(A)	57	40
WIRING DATA		
Strip Length(mm)	13	
Flexible Wire(mm ²)	0.5~6	
Rigid Wire(mm ²)	0.5~10	
Imperial Wire(AWG)	20~8	
Clamping Screw	M4/1.2~1.5N·m	
Disconnecting Screw	M3/0.6~0.8N·m	
PACKING		
Pcs/Inner Box	45	
Pcs/Master Carton	765	

ACCESSORIES

End Plate	Model	
	D-FJTK	
	Thickness	2mm
	Pcs/Bag	100
Fixed Bridge	Model	
	FB10-RTK/S	
	Max Current	41A
	Pcs/Bag	10
Insertion Bridge	Model	
	-	
	Max Current	-
	Pcs/Bag	-
Marking Tag	Model	
	ZB8	
	Pcs/Bag	100



FJ-5MTK

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x51x46.5	
Screw	M3, Zinc-Coated Steel	
Pressure Frame	Tin-Coated Brass	
Conductor	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	20	15
WIRING DATA		
Strip Length(mm)	8	
Flexible Wire(mm ²)	0.2~4	
Rigid Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Torque(N·m)	0.5~0.6	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	2400	

ACCESSORIES

End Plate	Model	
	-	
	Thickness	-
	Pcs/Bag	-
Fixed Bridge	Model	
	-	
	Max Current	-
	Pcs/Bag	-
Insertion Bridge	Model	
	EB10-6	
	Max Current	12A
	Pcs/Bag	10
Marking Tag	Model	
	ZB6	
	Pcs/Bag	100



TS-KK3



TS-K

CERTIFICATION	RoHS	RoHS
SMALL PARTITION		
Thickness(mm)	0.5	1.0
Material	PA66/V-0	PA66/V-0
PACKING		
Pcs/Bag	100	100



ATP-FJ



ATP-FBK

CERTIFICATION	RoHS	RoHS
PARTITION PLATE		
Thickness(mm)	1.5	2.5
Material	PA66/V-0	PA66/V-0
PACKING		
Pcs/Bag	100	100



DP-FJKKB2.5




DG-FJKK3/5



DP-FJKK3/5

CERTIFICATION	RoHS	RoHS	RoHS
SPACER PLATE			
Thickness(mm)	2.5	2.5	2.5
Material	PA66/V-0	PA66/V-0	PA66/V-0
PACKING			
Pcs/Bag	100	100	100



KLM-A

CERTIFICATION	RoHS
STRIP MARKER	
Size(mm)	9x42x35
Material	PA66/V-0
PACKING	
Pcs/Bag	100



FJBE/A

CERTIFICATION	RoHS
MARKING TERMINAL BLOCKS	
Size(mm)	9.5x44x46
Material	PA66/V-0
PACKING	
Pcs/Bag	100



FJBE/D

CERTIFICATION	RoHS
MARKING TERMINAL BLOCKS	
Size(mm)	15.5x44x46
Material	PA66/V-0
PACKING	
Pcs/Bag	100



E/FJ

CERTIFICATION	RoHS
END STOP	
Size(mm)	9x42x35
Material	PA66/V-0
PACKING	
Pcs/Bag	100



E/FJ1

CERTIFICATION	RoHS
END STOP	
Size(mm)	9x49.5x35
Material	PA66/V-0
PACKING	
Pcs/Bag	100



E/FBK2

CERTIFICATION	RoHS
END STOP	
Size(mm)	6x22.5x11.5
Material	PA66/V-0
PACKING	
Pcs/Bag	100




Usage of KLM-A

[SPRING TYPE TERMINAL BLOCKS]



- > Spring type terminal blocks are the featured products.
- > As the earliest researched series, Bloxconnect invested much effort and money, the spring-clamp technique has taken great development and has been in the ahead among the field.



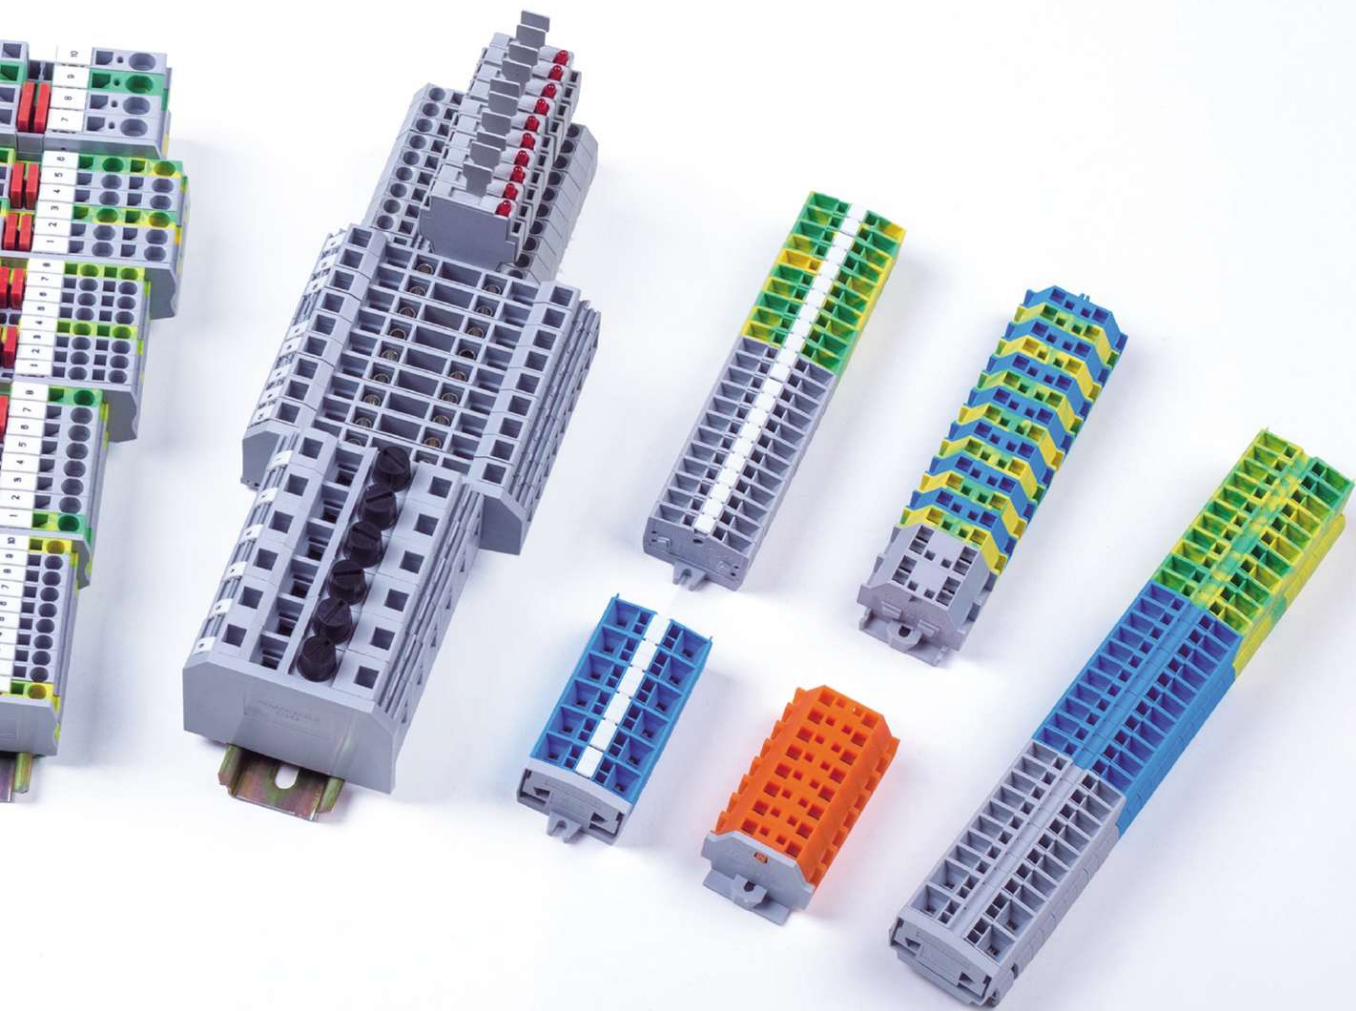

[FJ1 SERIES SPRING TYPE TERMINAL BLOCKS]


FJ1 series spring type terminal blocks, adopt front-entry connection, a screwdriver is enough in wiring operation. The conductor and screwdriver come in parallel from the same direction, thereby get the best visibility to the connection point. After the conductor is inserted into the connection compartment, the screwdriver is removed and the conductor automatically realizes connect tightly. The outstanding feature is easy, fast operation and time saving .

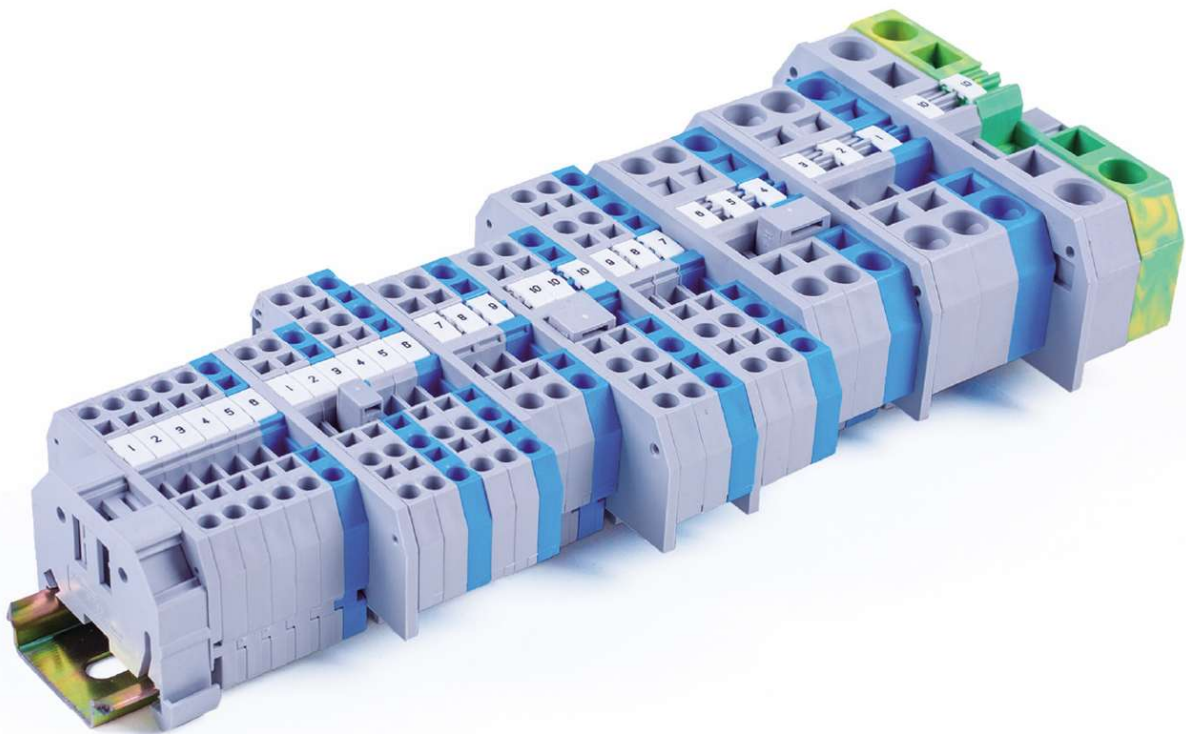

Connection of Wires



Removal of Terminal Blocks

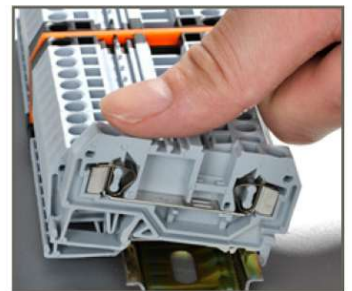

Installation on the Rail



FJ1-2.5



FJ1-2.5/3



FJ1-2.5/4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x53x32	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	4000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x65x32	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	3400	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x76x32	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	20	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	2550	

ACCESSORIES

End Plate		
	Model	P9/2.5
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T2.5
	Max Current	24A
	Pcs/Bag	100
Alternate Jumper		
	Model	H2.5
	Max Current	24A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES


End Plate		
	Model	P9-2.5/3
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T2.5
	Max Current	24A
	Pcs/Bag	100
Alternate Jumper		
	Model	H2.5
	Max Current	24A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P9-2.5/4
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T2.5
	Max Current	24A
	Pcs/Bag	100
Alternate Jumper		
	Model	H2.5
	Max Current	24A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100



FJ1-4



FJ1-4/3



FJ1-4/4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x59x33	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	3000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x73.5x33	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	2400	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x86x33	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	26	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	1920	

ACCESSORIES


End Plate		
	Model	P9/4
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T4
	Max Current	32A
	Pcs/Bag	100
Alternate Jumper		
	Model	H4
	Max Current	32A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P9-4/3
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T4
	Max Current	32A
	Pcs/Bag	100
Alternate Jumper		
	Model	H4
	Max Current	32A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES


End Plate		
	Model	P9-4/4
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T4
	Max Current	32A
	Pcs/Bag	100
Alternate Jumper		
	Model	H4
	Max Current	32A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

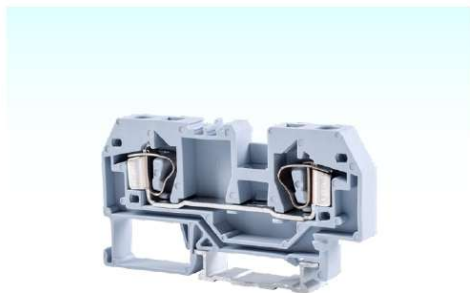

FJ1-6



FJ1-10

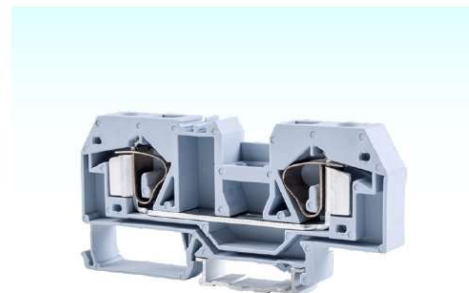

FJ1-16

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8x73.5x39	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	41	30
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	45	
Pcs/Master Carton	1800	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10x77x42	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	57	50
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~10	
Imperial Wire(AWG)	24~8	
Connection Points	2	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	1100	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12x94x44	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	76	65
WIRING DATA		
Strip Length(mm)	16~17	
Metric Wire(mm ²)	0.2~16	
Imperial Wire(AWG)	24~6	
Connection Points	2	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	425	

ACCESSORIES

End Plate		
	Model	P9/6
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T6
	Max Current	41A
	Pcs/Bag	100
Alternate Jumper		
	Model	H6
	Max Current	41A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P9/10
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T10
	Max Current	57A
	Pcs/Bag	100
Alternate Jumper		
	Model	H10
	Max Current	57A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P9/16
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T16
	Max Current	70A
	Pcs/Bag	100
Alternate Jumper		
	Model	H16
	Max Current	76A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100



FJ1-2.5/D



FJ1-2.5/D3



FJ1-2.5/D4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x53x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	2100	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x65x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	1785	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x76x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	1200	



FJ1-4/D



FJ1-4/D3



FJ1-4/D4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x59x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	1575	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x73.5x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1260	


CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x86x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	960	



FJ1-6/D



FJ1-10/D

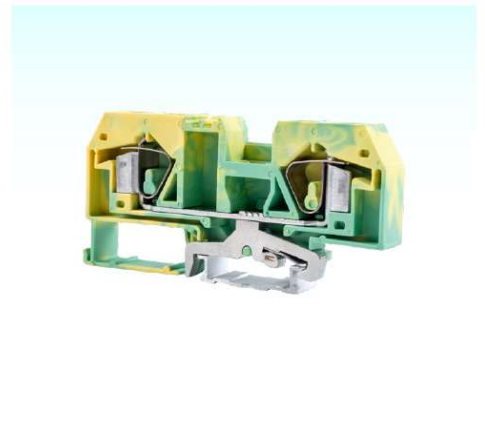


FJ1-16/D

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	8x73.5x39
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	12~13
Metric Wire(mm ²)	0.2~6
Imperial Wire(AWG)	24~10
Connection Points	2
PACKING	
Pcs/Inner Box	45
Pcs/Master Carton	945

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	10x77x42
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	12~13
Metric Wire(mm ²)	0.2~10
Imperial Wire(AWG)	24~8
Connection Points	2
PACKING	
Pcs/Inner Box	25
Pcs/Master Carton	575

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	12x94x44
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	16~17
Metric Wire(mm ²)	0.2~16
Imperial Wire(AWG)	24~6
Connection Points	2
PACKING	
Pcs/Inner Box	25
Pcs/Master Carton	425

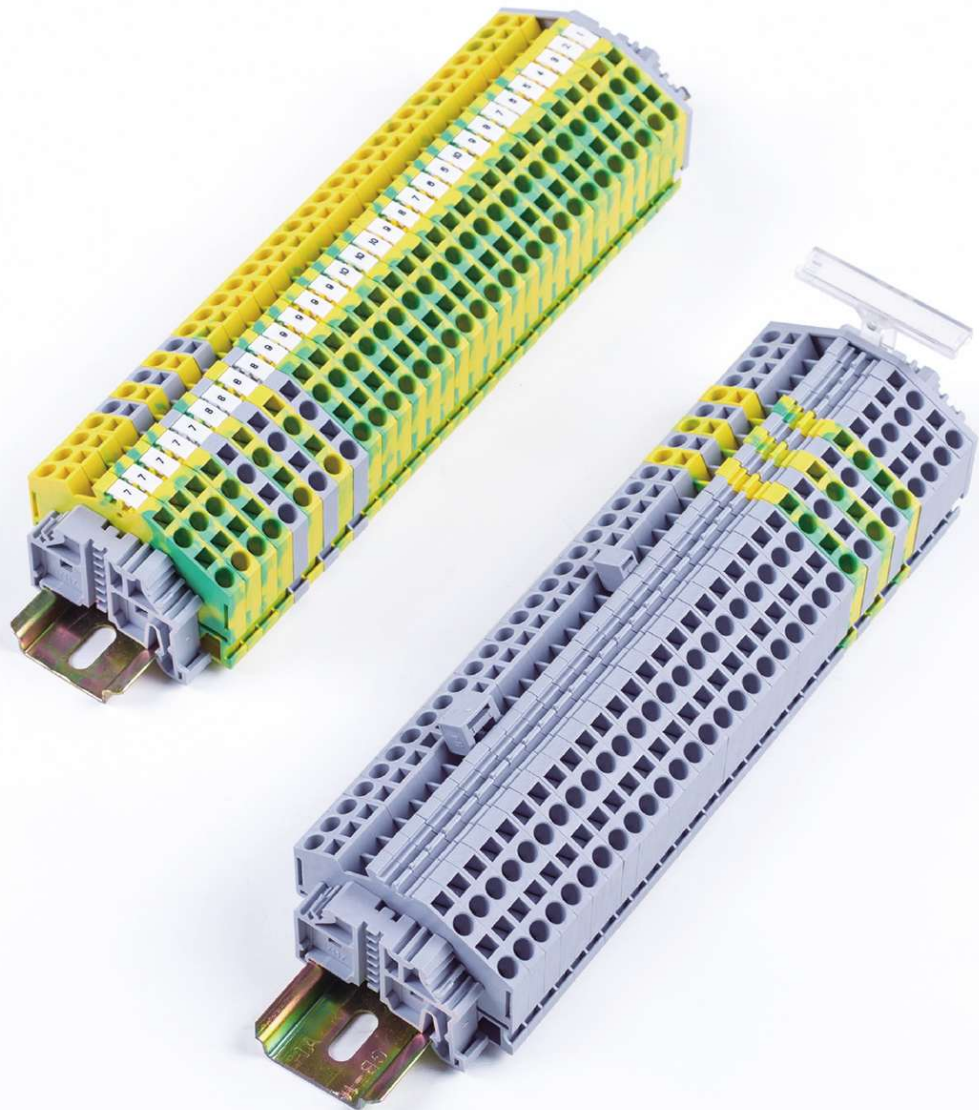

[ANGLED SPRING TYPE TERMINAL BLOCKS]

Angled spring type terminal blocks are the same as FJ1 series terminal blocks, adopt front-entry connection, but with angled design. This design makes better use of limited wiring space, and provides users better experiences.



FJ1-2.5/3S



FJ1-2.5/4S



FJ1-4/3S

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x50x40.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	3520	

CERTIFICATION	CB/CQC/CE/RoHS	
MATERIAL		
Size(mm)	5x50x40.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	3520	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x61.5x41	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	2420	

ACCESSORIES

End Plate		
	Model	P9-2.5/S
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T2.5
	Max Current	24A
	Pcs/Bag	100
Alternate Jumper		
	Model	H2.5
	Max Current	24A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P9-2.5/S
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	-
	Max Current	-
	Pcs/Bag	-
Alternate Jumper		
	Model	-
	Max Current	-
	Pcs/Bag	-
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P9-4/3S
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T4
	Max Current	32A
	Pcs/Bag	100
Alternate Jumper		
	Model	H4
	Max Current	32A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100




FJ1-2.5/D3S

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x50x43	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	1840	



FJ1-4/D3S

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x61.5x41	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	1265	

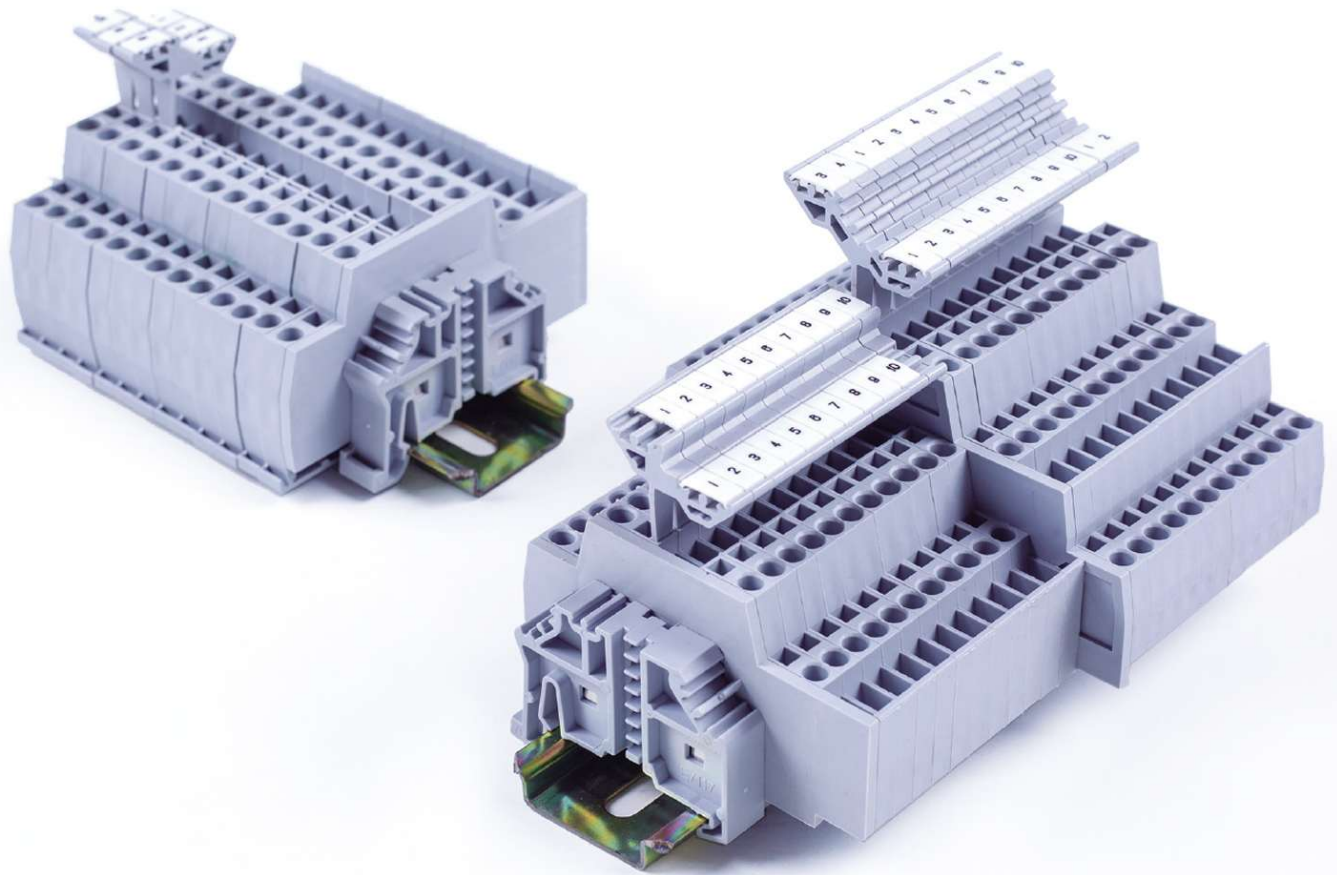


[MULTIPLE DECK SPRING TYPE TERMINAL BLOCKS]


Allow several conductors to be connected on two or three independent potentials. The different width design of each deck as well as the unique marker carrier, can serve great convenience to users. Meanwhile it can also save a lot of installation space.



FJ1-2.5K

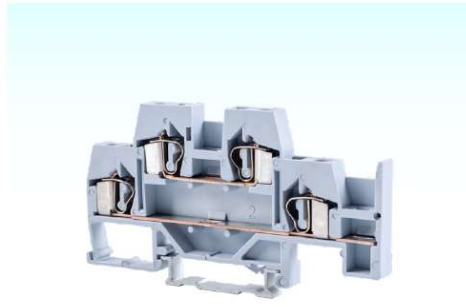

FJ1-4K

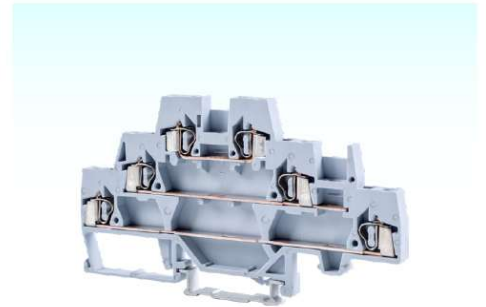

FJ1-2.5KK

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x75x43	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	20	15
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4(2x2)	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	2220	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x83x43	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	26	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	4(2x2)	
PACKING		
Pcs/Inner Box	43	
Pcs/Master Carton	1204	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x103x54.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	20	15
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	6(3x2)	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	1110	

ACCESSORIES

End Plate	Model	P9/2.5K
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T2.5
	Max Current	24A
	Pcs/Bag	100
Alternate Jumper		
	Model	H2.5
	Max Current	24A
	Pcs/Bag	100
Double-Deck Marker Carrier		
ZB-2.5K	See Page 148	
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES



End Plate	Model	P9/4K
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T4
	Max Current	32A
	Pcs/Bag	100
Alternate Jumper		
	Model	H4
	Max Current	32A
	Pcs/Bag	100
Double-Deck Marker Carrier		
ZB-4K	See Page 148	
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES


End Plate	Model	P9/2.5KK
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T2.5
	Max Current	24A
	Pcs/Bag	100
Alternate Jumper		
	Model	H2.5
	Max Current	24A
	Pcs/Bag	100
Double-Deck Marker Carrier		
ZB-2.5KK	See Page 148	
Central Marker		
ZB-S	Pcs/Bag	100

[FJ2 SERIES SIDE THROUGH SPRING TYPE TERMINAL BLOCKS]


FJ2 series side through terminal blocks, adopt side-entry connection, a screwdriver is enough in wiring operation. The screwdriver comes in the operation groove from the front and pushes the spring element, the conductor is inserted in the connection compartment from the side, the screwdriver is removed and the conductor automatically realizes connect tightly. They are widely used in communication, machine tool, automation, control system etc.

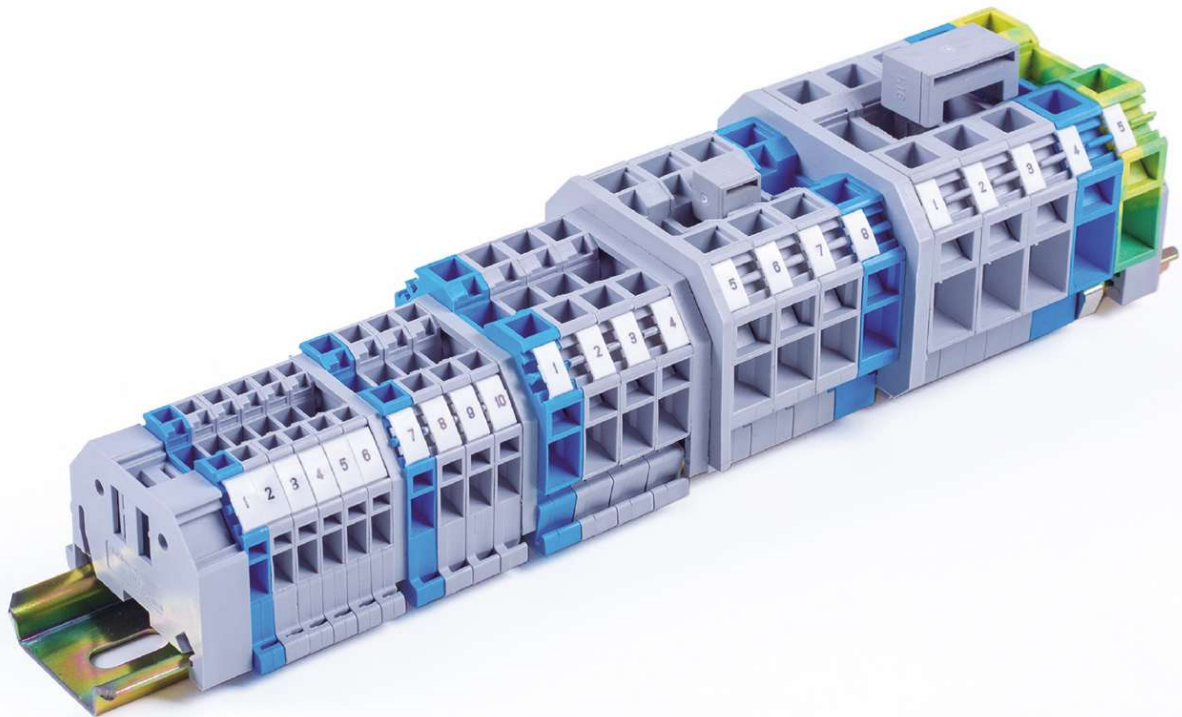

Connection of Wires



Removal of Terminal Blocks



Installation on the Rail



FJ2-2.5



FJ2-4



FJ2-6

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x42x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	4800	

ACCESSORIES

End Plate	Model	P1/2.5
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T2.5
	Max Current	24A
	Pcs/Bag	100
Alternate Jumper		
	Model	H2.5
	Max Current	24A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x41.5x37.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	4080	

ACCESSORIES

End Plate	Model	P1/4
	Thickness	3mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T4
	Max Current	32A
	Pcs/Bag	100
Alternate Jumper		
	Model	H4
	Max Current	32A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8x46.5x41	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage (kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	41	30
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	35	
Pcs/Master Carton	2100	

ACCESSORIES

End Plate	Model	P1/6
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T6
	Max Current	41A
	Pcs/Bag	100
Alternate Jumper		
	Model	H6
	Max Current	41A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100




FJ2-10

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10x52x45	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	57	50
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~10	
Imperial Wire(AWG)	24~8	
Connection Points	2	
PACKING		
Pcs/Inner Box	24	
Pcs/Master Carton	1440	

ACCESSORIES

End Plate		
	Model	P1/10
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T10
	Max Current	57A
	Pcs/Bag	100
Alternate Jumper		
	Model	H10
	Max Current	57A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100



FJ2-16

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12x58x50	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	76	65
WIRING DATA		
Strip Length(mm)	16~17	
Metric Wire(mm ²)	0.2~16	
Imperial Wire(AWG)	24~6	
Connection Points	2	
PACKING		
Pcs/Inner Box	36	
Pcs/Master Carton	612	

ACCESSORIES

End Plate		
	Model	P1/16
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T16
	Max Current	70A
	Pcs/Bag	100
Alternate Jumper		
	Model	H16
	Max Current	70A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100



FJ2-2.5/D



FJ2-4/D



FJ2-6/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x44x37	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	2400	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x44.5x41	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	2040	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8x46.5x44	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	35	
Pcs/Master Carton	1190	



FJ2-10/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10x52x49	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~10	
Imperial Wire(AWG)	24~8	
Connection Points	2	
PACKING		
Pcs/Inner Box	24	
Pcs/Master Carton	816	




FJ2-16/D


CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12x58x52	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	16~17	
Metric Wire(mm ²)	0.2~16	
Imperial Wire(AWG)	24~6	
Connection Points	2	
PACKING		
Pcs/Inner Box	36	
Pcs/Master Carton	612	

[MINI SPRING TYPE TERMINAL BLOCKS]

FJ3, FJ4, FJ5 series mini spring type terminal blocks could meet the increasing demands for smaller electric connection solutions. The outstanding characteristic is their compact construction design for a narrow wiring environment, makes space-saving to the extreme. Also offer 4-conductor type.

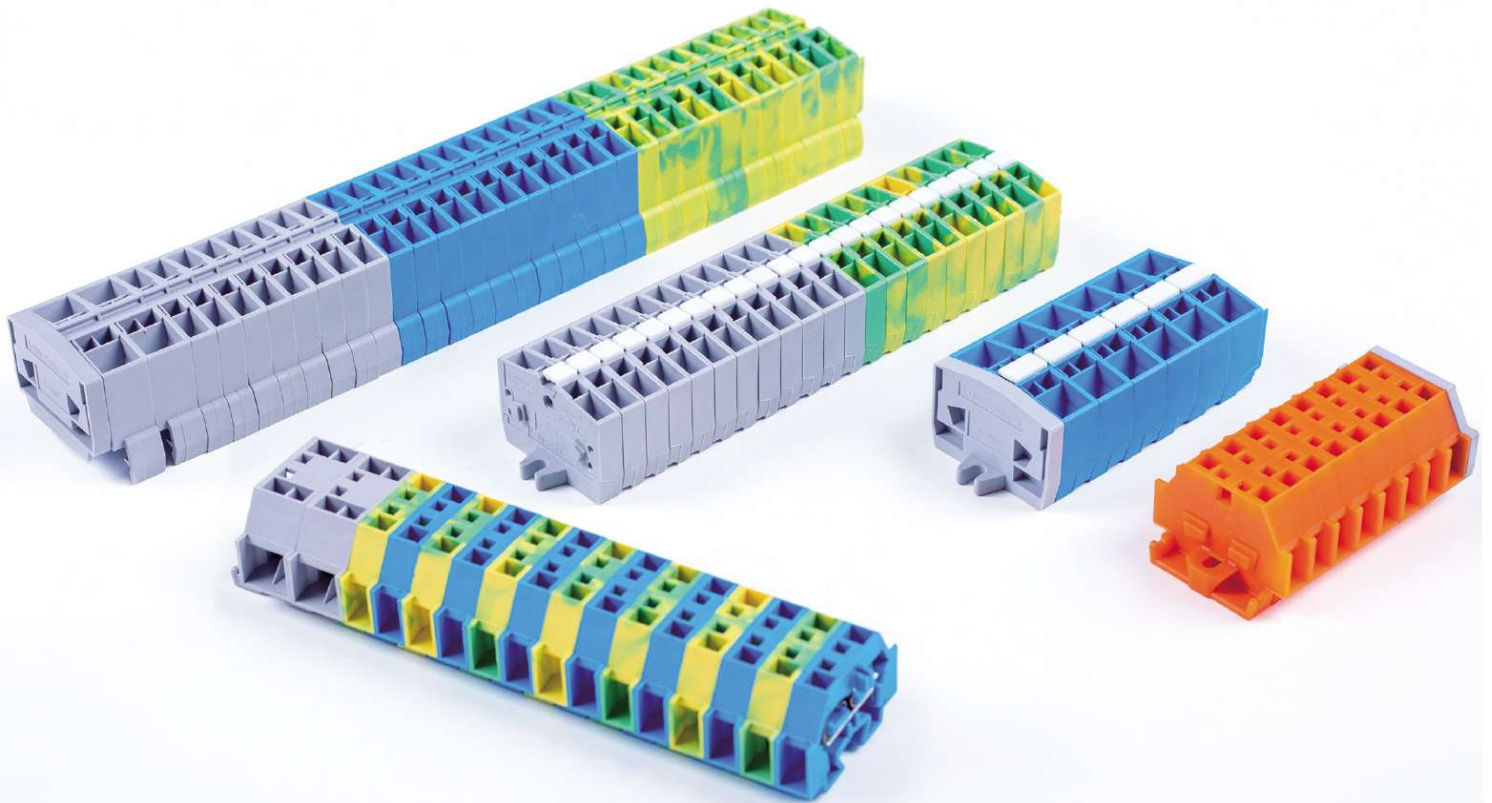

Connection of Wires



Using a Rail Mounting-Feet



Installation on the Rail



FJ3-2.5



FJ3A-2.5

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x38x27	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	4200	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10x38x27	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	4000	

ACCESSORIES

End Plate		
	Model	PG2.5
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	TG2.5
	Max Current	16A
	Pcs/Bag	100
Central Marker		
ZB-M	Pcs/Bag	50

ACCESSORIES

End Plate		
	Model	PG2.5
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	TG2.5
	Max Current	16A
	Pcs/Bag	100
Central Marker		
ZB-MA	Pcs/Bag	50



FJ4-2.5



FJ4A-2.5

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x32x22	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	6000	

ACCESSORIES

End Plate		
	Model	PU2.5
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	TG2.5
	Max Current	16A
	Pcs/Bag	100
Central Marker		
ZB-M	Pcs/Bag	50

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10x32x22	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	4000	

ACCESSORIES

End Plate		
	Model	PU2.5
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	TG2.5
	Max Current	16A
	Pcs/Bag	100
Central Marker		
ZB-MA	Pcs/Bag	50



FJ5-1.5



FJ5-2.5



FJ5-4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x25x17	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	400	300
Current(A)	18	10
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~1.5	
Imperial Wire(AWG)	28~16	
Connection Points	2	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	12000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x28x18	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	500	300
Current(A)	24	15
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	9200	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	7x33.4x23	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	630	300
Current(A)	32	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	7000	

ACCESSORIES

End Plate	Model	
	Model	PD1.5
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper	Model	
	Model	TD1.5
	Max Current	10A
	Pcs/Bag	100
Snap-in Mounting Feet	Model	
	Model	U35
	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	Model	PD2.5
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper	Model	
	Model	TD2.5
	Max Current	16A
	Pcs/Bag	100
Snap-in Mounting Feet	Model	
	Model	U35
	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	Model	PD4
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper	Model	
	Model	TD4
	Max Current	16A
	Pcs/Bag	100
Snap-in Mounting Feet	Model	
	Model	U35
	Pcs/Bag	100



FJ5A-1.5



FJ5A-2.5



FJ5A-4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8x25x17	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	400	300
Current(A)	18	10
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~1.5	
Imperial Wire(AWG)	28~16	
Connection Points	4	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	8000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10x28x18	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	500	300
Current(A)	24	15
WIRING DATA		
Strip Length(mm)	8~9	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	200	
Pcs/Master Carton	6000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12x33.4x23	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998-2-2	UL 1059
Voltage(V)	630	600
Current(A)	32	20
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	3000	

ACCESSORIES

End Plate	Model	PD1.5
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper	Model	TD1.5
	Max Current	10A
	Pcs/Bag	100
Snap-in Mounting Feet	Model	U35
	Pcs/Bag	100

ACCESSORIES


End Plate	Model	PD2.5
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper	Model	TD2.5
	Max Current	16A
	Pcs/Bag	100
Snap-in Mounting Feet	Model	U35
	Pcs/Bag	100

ACCESSORIES

End Plate	Model	PD4
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper	Model	TD4
	Max Current	16A
	Pcs/Bag	100
Snap-in Mounting Feet	Model	U35
	Pcs/Bag	100

[FJ6 SERIES SPRING TYPE TERMINAL BLOCKS]

FJ6 series spring type terminal blocks, adopt front-entry connection method, the connection principle is the same as FJ1 series. Also create vibration-proof, corrosion-free, maintenance-free and time-saving connection with long-term stability. The current-carrying metals consist of high-grade copper alloys, the spring elements are made of high-strength tin-coated spring steel. The 3-conductor type and 4-conductor type allow multiple conductors to be connected on one potential.

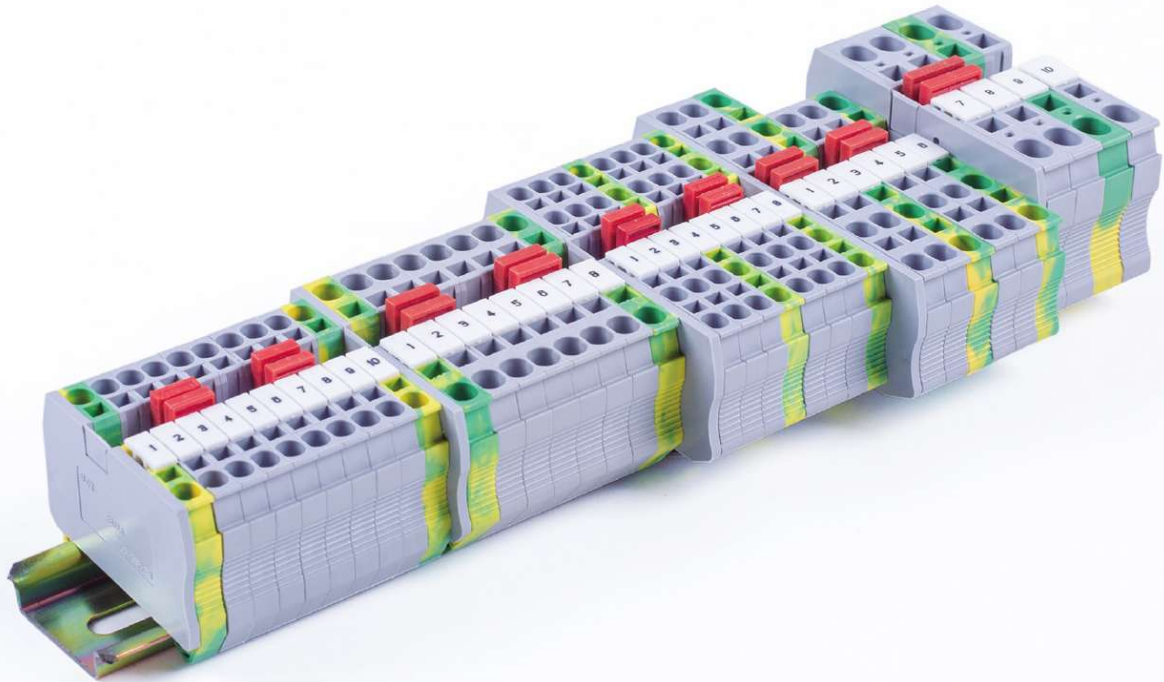

Connection of Wires



Installation of Plug-In Bridges



Removal of Plug-In Bridges



FJ6-1.5



FJ6-1.5/3



FJ6-1.5/4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	4.2x49x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	17.5	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.08~1.5	
Imperial Wire(AWG)	28~16	
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	4000	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	4.2x60.5x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	17.5	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.08~1.5	
Imperial Wire(AWG)	28~16	
Connection Points	3	
PACKING		
Pcs/Inner Box	110	
Pcs/Master Carton	4400	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	4.2x72x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	17.5	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.08~1.5	
Imperial Wire(AWG)	28~16	
Connection Points	4	
PACKING		
Pcs/Inner Box	90	
Pcs/Master Carton	3600	

ACCESSORIES

End Plate		
	Model	P6/2.5
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-4	Positions	2
FJS10-4	Positions	10
See Page 145		
Central Marker		
ZB4	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P6-2.5/3
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-4	Positions	2
FJS10-4	Positions	10
See Page 145		
Central Marker		
ZB4	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P6-2.5/4
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-4	Positions	2
FJS10-4	Positions	10
See Page 145		
Central Marker		
ZB4	Pcs/Bag	100



FJ6-2.5



FJ6-2.5/3



FJ6-2.5/4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x49x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	31	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~2.5	
Imperial Wire(AWG)	24~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	4080	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x61x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	28	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~2.5	
Imperial Wire(AWG)	24~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	66	
Pcs/Master Carton	3630	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x72x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	28	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~2.5	
Imperial Wire(AWG)	24~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	2880	

ACCESSORIES


End Plate	Model	
	Model	P6/2.5
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
	See Page 145	
Central Marker		
ZB5	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	Model	P6-2.5/3
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
	See Page 145	
Central Marker		
ZB5	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	Model	P6-2.5/4
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
	See Page 145	
Central Marker		
ZB5	Pcs/Bag	100

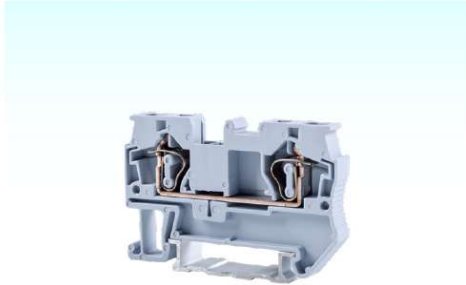

FJ6-4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x56x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	40	30
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	3200	

ACCESSORIES

End Plate		
	Model	P6/4
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS10-6	Positions	10
See Page 145		
Central Marker		
ZB6	Pcs/Bag	100




FJ6-4/3

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x72.5x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	40	30
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	2400	

ACCESSORIES

End Plate		
	Model	P6-4/3
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS10-6	Positions	10
See Page 145		
Central Marker		
ZB6	Pcs/Bag	100

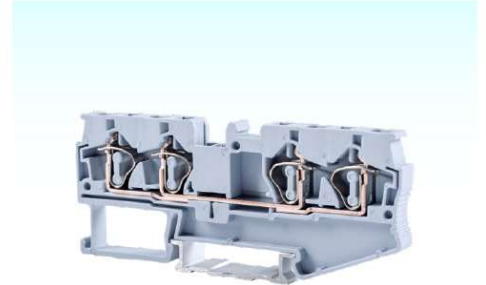

FJ6-4/4


CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x88x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	40	30
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	1920	

ACCESSORIES

End Plate		
	Model	P6-4/4
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS10-6	Positions	10
See Page 145		
Central Marker		
ZB6	Pcs/Bag	100



FJ6-6

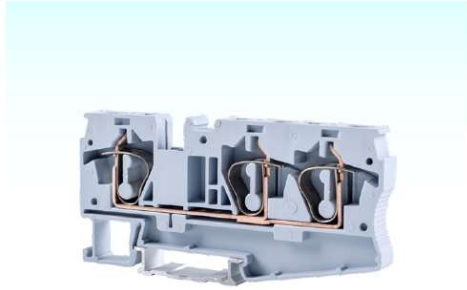

FJ6-6/3



FJ6-10

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8x70x42	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	52	50
WIRING DATA		
Strip Length(mm)	12	
Metric Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	45	
Pcs/Master Carton	1800	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8x91x42	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	52	50
WIRING DATA		
Strip Length(mm)	12	
Metric Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Connection Points	3	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	840	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x71.5x49.9	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	65	65
WIRING DATA		
Strip Length(mm)	18	
Metric Wire(mm ²)	0.2~10	
Imperial Wire(AWG)	24~8	
Connection Points	2	
PACKING		
Pcs/Inner Box	36	
Pcs/Master Carton	612	

ACCESSORIES

End Plate	Model	Pcs/Bag
	P6/6	100
	Thickness	2.2mm
Plug-In Bridge		
FJS2-8	Positions	2
	See Page 145	
Central Marker		
ZB8	Pcs/Bag	100

ACCESSORIES

End Plate	Model	Pcs/Bag
	P6-6/3	100
	Thickness	2.2mm
Plug-In Bridge		
FJS2-8	Positions	2
	See Page 145	
Central Marker		
ZB8	Pcs/Bag	100

ACCESSORIES


End Plate	Model	Pcs/Bag
	P6/10	100
	Thickness	2.2mm
Plug-In Bridge		
FJS2-10	Positions	2
	See Page 145	
Central Marker		
ZB10	Pcs/Bag	100



FJ6-16

CERTIFICATION		CB/CE/UKCA/RoHS	
MATERIAL			
Size(mm)	12.2x81x51		
Clamping Spring	Stainless Steel		
Conductor	Tin-Coated Copper		
Housing	PA66/V-0		
ELECTRICAL DATA			
Impulse Voltage(kV)	8		
Standards	IEC 60947-7-1	UL 1059	
Voltage(V)	1000	600	
Current(A)	90	85	
WIRING DATA			
Strip Length(mm)	18		
Metric Wire(mm ²)	0.2~16		
Imperial Wire(AWG)	24~6		
Connection Points	2		
PACKING			
Pcs/Inner Box	25		
Pcs/Master Carton	350		

ACCESSORIES

End Plate		
	Model	P6/16
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-12	Positions	2
See Page 145		
Central Marker		
ZB10	Pcs/Bag	100



FJ6-1.5/D



FJ6-1.5/D3



FJ6-1.5/D4

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	4.2x49x35
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	8~10
Metric Wire(mm ²)	0.08~1.5
Imperial Wire(AWG)	28~16
Connection Points	2
PACKING	
Pcs/Inner Box	100
Pcs/Master Carton	2400

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	4.2x60.5x35
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	8~10
Metric Wire(mm ²)	0.08~1.5
Imperial Wire(AWG)	28~16
Connection Points	3
PACKING	
Pcs/Inner Box	110
Pcs/Master Carton	2310

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	4.2x72x35
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	8~10
Metric Wire(mm ²)	0.08~1.5
Imperial Wire(AWG)	28~16
Connection Points	4
PACKING	
Pcs/Inner Box	90
Pcs/Master Carton	1890



FJ6-2.5/D



FJ6-2.5/D3



FJ6-2.5/D4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x49x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~2.5	
Imperial Wire(AWG)	24~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	2040	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x61x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~2.5	
Imperial Wire(AWG)	24~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	66	
Pcs/Master Carton	1848	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5x72x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~2.5	
Imperial Wire(AWG)	24~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1440	



FJ6-4/D



FJ6-4/D3



FJ6-4/D4

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x56x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	1680	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x72.5x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1260	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x88x35	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	960	



FJ6-6/D



FJ6-6/D3




FJ6-10/D

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	8x70x42
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	12
Metric Wire(mm ²)	0.2~6
Imperial Wire(AWG)	24~10
Connection Points	2
PACKING	
Pcs/Inner Box	45
Pcs/Master Carton	765

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	8x91x42
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	12
Metric Wire(mm ²)	0.2~6
Imperial Wire(AWG)	24~10
Connection Points	3
PACKING	
Pcs/Inner Box	40
Pcs/Master Carton	680

CERTIFICATION	CB/CE/UKCA/RoHS
MATERIAL	
Size(mm)	10.2x71.5x49.9
Clamping Spring	Stainless Steel
Conductor	Tin-Coated Copper
Housing	PA66/V-0
ELECTRICAL DATA	
Impulse Voltage(kV)	8
Standards	IEC 60947-7-2 UL 1059
Voltage(V)	-
Current(A)	-
WIRING DATA	
Strip Length(mm)	18
Metric Wire(mm ²)	0.2~10
Imperial Wire(AWG)	24~8
Connection Points	2
PACKING	
Pcs/Inner Box	36
Pcs/Master Carton	612

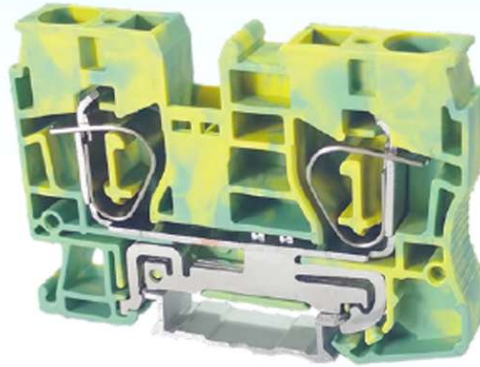

FJ6-16/D

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x81x51	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	-	-
WIRING DATA		
Strip Length(mm)	18	
Metric Wire(mm ²)	0.2~16	
Imperial Wire(AWG)	24~6	
Connection Points	2	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	350	



FJ6-2.5K



FJ6-4K



FJ6-2.5KK

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x67.8x46	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	26	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	70	
Pcs/Master Carton	1190	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x84x46	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	32	30
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	43	
Pcs/Master Carton	946	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x99.5x56.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	28	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.08~2.5	
Imperial Wire(AWG)	28~14	
Connection Points	6	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	660	

ACCESSORIES

End Plate	Model	P6/2.5K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
	See Page 145	
Central Marker		
ZBF5	Pcs/Bag	100

ACCESSORIES


End Plate	Model	P6/4K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS10-6	Positions	10
	See Page 145	
Central Marker		
ZBF6	Pcs/Bag	100

ACCESSORIES

End Plate	Model	P6/2.5KK
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
	See Page 145	
Central Marker		
ZBF5	Pcs/Bag	100

[SPRING TYPE FUSE TERMINAL BLOCKS]

[SPRING TYPE TEST TERMINAL BLOCKS]

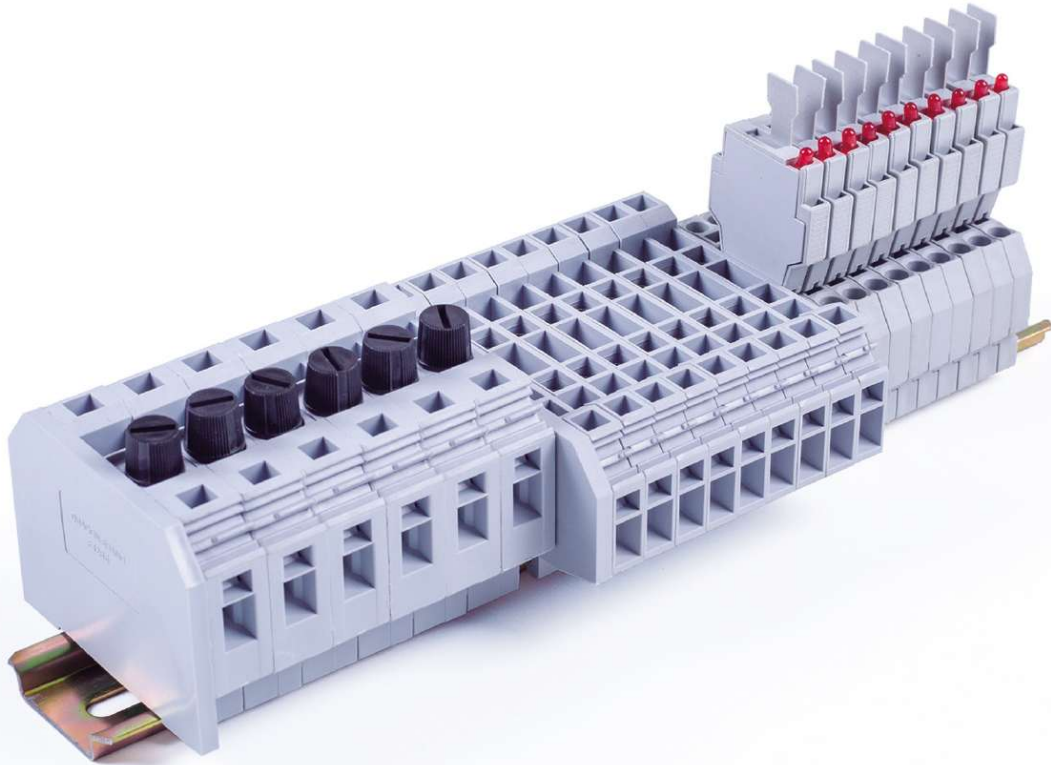


Installation of a Fuse



Test Terminal Blocks



Fuse Terminal Blocks with Indicator Light

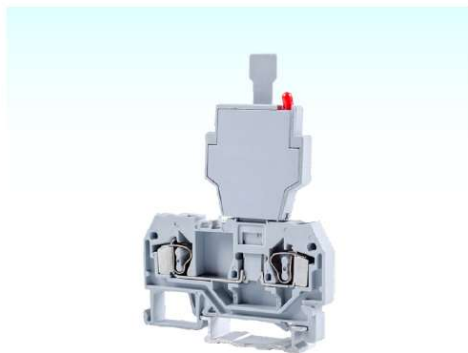

①Electrical Data Depends on Fuses

FJ1R-4

FJ2-6S

FJ2R-6

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6x59x81.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-3	UL1059
Max Voltage(V)	250①	-
Max Current(A)	6.3①	-
WIRING DATA		
Strip Length(mm)	9~10	
Metric Wire(mm ²)	0.08~4	
Imperial Wire(AWG)	28~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	36	
Pcs/Master Carton	720	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	13x62x58	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Max Voltage(V)	400	300
Max Current(A)	41	30
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	28	
Pcs/Master Carton	644	

CERTIFICATION	CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8x86x41.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-3	UL 1059
Max Voltage(V)	220①	600
Max Current(A)	10①	10
WIRING DATA		
Strip Length(mm)	12~13	
Metric Wire(mm ²)	0.2~6	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	36	
Pcs/Master Carton	720	

ACCESSORIES

End Plate		
	Model	P9/4
	Thickness	2.5mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	-
	Max Current	-
	Pcs/Bag	-
Alternate Jumper		
	Model	-
	Max Current	-
	Pcs/Bag	-
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES



End Plate		
	Model	P2/6S
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T6
	Max Current	41A
	Pcs/Bag	100
Alternate Jumper		
	Model	H6
	Max Current	41A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

ACCESSORIES


End Plate		
	Model	P2R/6
	Thickness	4mm
	Pcs/Bag	100
Adjacent Jumper		
	Model	T6
	Max Current	41A
	Pcs/Bag	100
Alternate Jumper		
	Model	H6
	Max Current	41A
	Pcs/Bag	100
Central Marker		
ZB-S	Pcs/Bag	100

[FJ7 SERIES PUSH-IN TERMINAL BLOCKS]

Thanks to the new self-actuating connection technology, FJ7 Series push-in terminal blocks can quickly install all types of conductors without any tools. With the force-guided pusher element, it can release and contact spring re-tensioning quicker and easier.

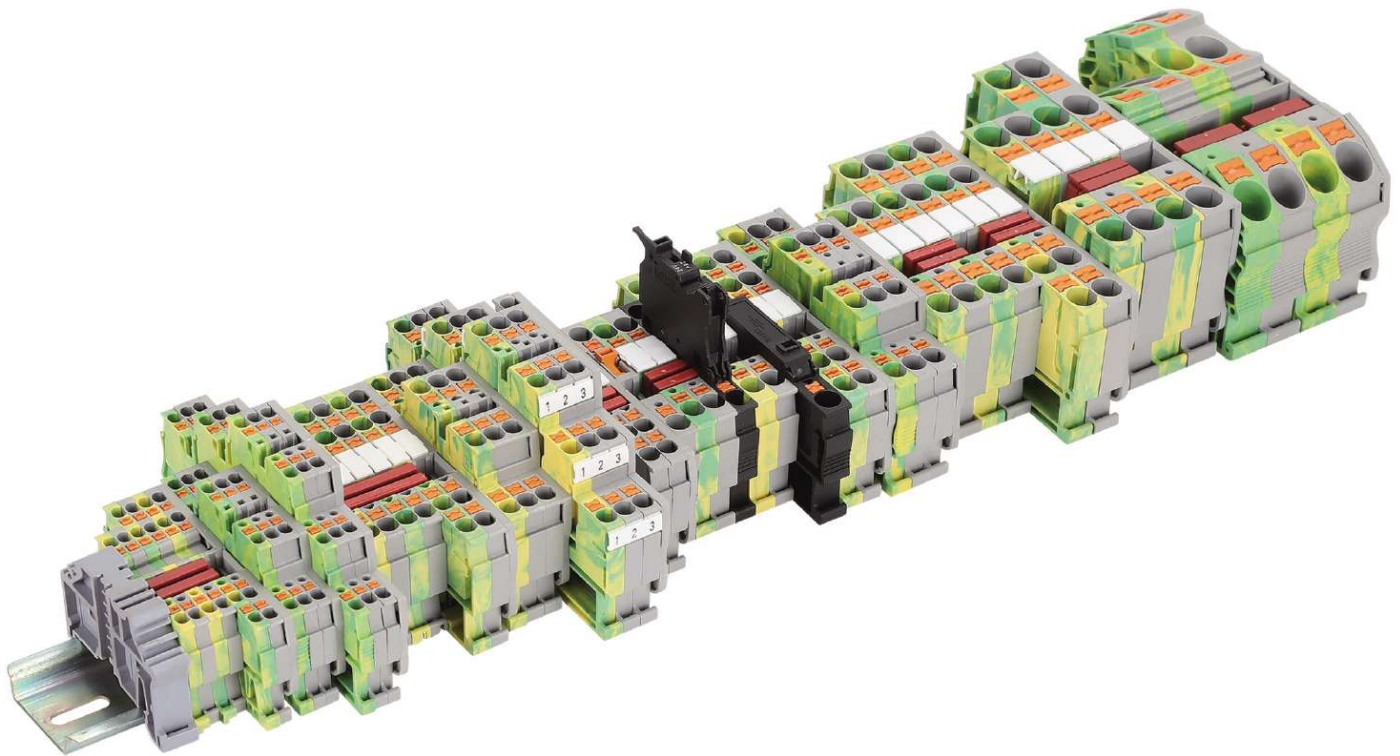


Connection of Wires




Disassembly of wires



FJ7-1.5
FJ7N-1.5(UL)



FJ7-1.5/3
FJ7N-1.5/3(UL)



FJ7-1.5/4
FJ7N-1.5/4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x45x30.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	17.5	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	3300	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x54x30.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	17.5	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	130	
Pcs/Master Carton	2730	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x63.2x30.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	17.5	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	90	
Pcs/Master Carton	2160	

ACCESSORIES

End Plate	Model	
	P7/1.5	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
See Page 145		
Central Marker		
ZB3.5	Pcs/Bag	100
Side Marker		
ZBF3.5	Pcs/Bag	100

ACCESSORIES


End Plate	Model	
	P7-1.5/3	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
See Page 145		
Central Marker		
ZB3.5	Pcs/Bag	100
Side Marker		
ZBF3.5	Pcs/Bag	100

ACCESSORIES


End Plate	Model	
	P7-1.5/4	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
See Page 145		
Central Marker		
ZB3.5	Pcs/Bag	100
Side Marker		
ZBF3.5	Pcs/Bag	100



FJ7-2.5
FJ7N-2.5(UL)



FJ7-2.5/3
FJ7N-2.5/3(UL)



FJ7-2.5/4
FJ7N-2.5/4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x48.6x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	2040	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x60.5x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	1785	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x72.2x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	24	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1440	

ACCESSORIES


End Plate	Model	
	P7/2.5	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
See Page 145		
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100

ACCESSORIES


End Plate	Model	
	P7-2.5/3	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
See Page 145		
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100

ACCESSORIES


End Plate	Model	
	P7-2.5/4	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
See Page 145		
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100



FJ7-4
FJ7N-4(UL)



FJ7-4/3
FJ7N-4/3(UL)



FJ7-4/4
FJ7N-4/4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x56x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	30
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	1680	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x66.5x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	30
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	3	
PACKING		
Pcs/Inner Box	53	
Pcs/Master Carton	1272	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x77x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	800	600
Current(A)	32	30
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	4	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1020	

ACCESSORIES

End Plate	Model	
	P7/4	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
	See Page 145	
Central Marker		
ZB6	Pcs/Bag	100
Side Marker		
ZBF6	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	P7-4/3	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
	See Page 145	
Central Marker		
ZB6	Pcs/Bag	100
Side Marker		
ZBF6	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	P7-4/4	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
	See Page 145	
Central Marker		
ZB6	Pcs/Bag	100
Side Marker		
ZBF6	Pcs/Bag	100



FJ7-6
FJ7N-6(UL)



FJ7-6/3
FJ7N-6/3(UL)



FJ7-6/4
FJ7N-6/4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x57.7x42.2	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	41	40
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~8	
Connection Points	2	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	935	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x74.2x42.2	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	41	40
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~8	
Connection Points	3	
PACKING		
Pcs/Inner Box	45	
Pcs/Master Carton	765	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x90.5x42.2	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	41	40
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~8	
Connection Points	4	
PACKING		
Pcs/Inner Box	34	
Pcs/Master Carton	578	

ACCESSORIES

End Plate	Model	
	P7/6	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-8	Positions	2
FJS3-8	Positions	3
FJS4-8	Positions	4
FJS5-8	Positions	5
FJS10-8	Positions	10
	See Page 145	
Central Marker		
ZB8	Pcs/Bag	100
Side Marker		
ZBF8	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	P7-6/3	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-8	Positions	2
FJS3-8	Positions	3
FJS4-8	Positions	4
FJS5-8	Positions	5
FJS10-8	Positions	10
	See Page 145	
Central Marker		
ZB8	Pcs/Bag	100
Side Marker		
ZBF8	Pcs/Bag	100

ACCESSORIES

End Plate	Model	
	P7-6/4	
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-8	Positions	2
FJS3-8	Positions	3
FJS4-8	Positions	4
FJS5-8	Positions	5
FJS10-8	Positions	10
	See Page 145	
Central Marker		
ZB8	Pcs/Bag	100
Side Marker		
ZBF8	Pcs/Bag	100



FJ7-10
FJ7N-10(UL)



FJ7-10/3
FJ7N-10/3(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x67.7x49.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	57	60
WIRING DATA		
Strip Length(mm)	18	
Metric Wire(mm ²)	0.5~10	
Imperial Wire(AWG)	20~6	
Connection Points	2	
PACKING		
Pcs/Inner Box	37	
Pcs/Master Carton	629	

ACCESSORIES

End Plate		
	Model	P7/10
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-10	Positions	2
FJS3-10	Positions	3
FJS5-10	Positions	5
FJS10-10	Positions	10
See Page 145		
Central Marker		
ZB10	Pcs/Bag	100
Side Marker		
ZBF10	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x88.9x49.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	600
Current(A)	57	60
WIRING DATA		
Strip Length(mm)	18	
Metric Wire(mm ²)	0.5~10	
Imperial Wire(AWG)	20~6	
Connection Points	3	
PACKING		
Pcs/Inner Box	28	
Pcs/Master Carton	476	

ACCESSORIES

End Plate		
	Model	P7-10/3
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-10	Positions	2
FJS3-10	Positions	3
FJS5-10	Positions	5
FJS10-10	Positions	10
See Page 145		
Central Marker		
ZB10	Pcs/Bag	100
Side Marker		
ZBF10	Pcs/Bag	100



FJ7-16
FJ7N-16(UL)



FJ7-16/3
FJ7N-16/3(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x75.4x52.6	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	550
Current(A)	76	85
WIRING DATA		
Strip Length(mm)	18~20	
Metric Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	20~4	
Connection Points	2	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	600	

ACCESSORIES

End Plate		
	Model	P7/16
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-12	Positions	2
	See Page 145	
Central Marker		
ZB12	Pcs/Bag	100
Side Marker		
ZBF12	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x100.2x52.6	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	1000	550
Current(A)	76	85
WIRING DATA		
Strip Length(mm)	18~20	
Metric Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	20~4	
Connection Points	3	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	400	

ACCESSORIES


End Plate		
	Model	P7-16/3
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-12	Positions	2
	See Page 145	
Central Marker		
ZB12	Pcs/Bag	100
Side Marker		
ZBF12	Pcs/Bag	100



FJ7-1.5/D
FJ7N-1.5/D(UL)



FJ7-1.5/D3
FJ7-1.5/D3(UL)



FJ7-1.5/D4
FJ7N-1.5/D4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x45x30.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamber	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	17.5	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	3300	
Central Marker		
ZB3.5	Pcs/Bag	100
Side Marker		
ZBF3.5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x54x30.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamber	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	17.5	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	3	
PACKING		
Pcs/Inner Box	130	
Pcs/Master Carton	2730	
Central Marker		
ZB3.5	Pcs/Bag	100
Side Marker		
ZBF3.5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x63.2x30.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamber	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	17.5	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	90	
Pcs/Master Carton	2160	
Central Marker		
ZB3.5	Pcs/Bag	100
Side Marker		
ZBF3.5	Pcs/Bag	100



FJ7-2.5/D
FJ7N-2.5/D(UL)



FJ7-2.5/D3
FJ7N-2.5/D3(UL)



FJ7-2.5/D4
FJ7N-2.5/D4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x48.6x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	24	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	2040	
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x60.5x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	24	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	85	
Pcs/Master Carton	1785	
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x72.2x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	24	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1440	
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100



FJ7-4/D
FJ7N-4/D(UL)



FJ7-4/D3
FJ7N-4/D3(UL)



FJ7-4/D4
FJ7N-4/D4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x56x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	32	-
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	1680	
Central Marker		
ZB6	Pcs/Bag	100
Side Marker		
ZBF6	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x66.5x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	32	-
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	3	
PACKING		
Pcs/Inner Box	53	
Pcs/Master Carton	1272	
Central Marker		
ZB6	Pcs/Bag	100
Side Marker		
ZBF6	Pcs/Bag	100


CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x77x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	32	-
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	4	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1020	
Central Marker		
ZB6	Pcs/Bag	100
Side Marker		
ZBF6	Pcs/Bag	100



FJ7-6/D
FJ7N-6/D(UL)



FJ7-6/D3
FJ7N-6/D3(UL)



FJ7-6/D4
FJ7N-6/D4(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x57.7x42.2	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamber	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	41	-
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~8	
Connection Points	2	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	935	
Central Marker		
ZB8	Pcs/Bag	100
Side Marker		
ZBF8	Pcs/Bag	100


CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x74.2x42.2	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamber	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	41	-
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~8	
Connection Points	3	
PACKING		
Pcs/Inner Box	45	
Pcs/Master Carton	765	
Central Marker		
ZB8	Pcs/Bag	100
Side Marker		
ZBF8	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	8.2x90.5x42.2	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamber	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	41	-
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.5~6	
Imperial Wire(AWG)	20~8	
Connection Points	4	
PACKING		
Pcs/Inner Box	34	
Pcs/Master Carton	578	
Central Marker		
ZB8	Pcs/Bag	100
Side Marker		
ZBF8	Pcs/Bag	100



FJ7-10/D
FJ7N-10/D(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x67.7x49.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	57	-
WIRING DATA		
Strip Length(mm)	18	
Metric Wire(mm ²)	0.5~10	
Imperial Wire(AWG)	20~6	
Connection Points	2	
PACKING		
Pcs/Inner Box	37	
Pcs/Master Carton	629	
Central Marker		
ZB10	Pcs/Bag	100
Side Marker		
ZBF10	Pcs/Bag	100

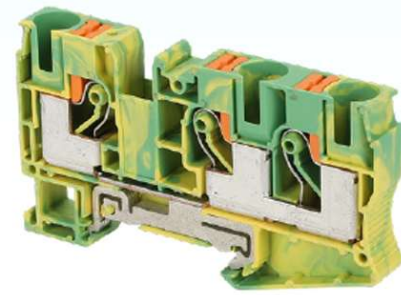

FJ7-10/D3
FJ7N-10/D3(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	10.2x88.9x49.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	57	-
WIRING DATA		
Strip Length(mm)	18	
Metric Wire(mm ²)	0.5~10	
Imperial Wire(AWG)	20~6	
Connection Points	3	
PACKING		
Pcs/Inner Box	28	
Pcs/Master Carton	476	
Central Marker		
ZB10	Pcs/Bag	100
Side Marker		
ZBF10	Pcs/Bag	100



FJ7-16/D
FJ7N-16/D(UL)



FJ7-16/D3
FJ7N-16/D3(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x75.4x52.6	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	76	-
WIRING DATA		
Strip Length(mm)	18~20	
Metric Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	20~4	
Connection Points	2	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	600	
Central Marker		
ZB12	Pcs/Bag	100
Side Marker		
ZBF12	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	12.2x75.4x52.6	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	76	-
WIRING DATA		
Strip Length(mm)	18~20	
Metric Wire(mm ²)	0.5~16	
Imperial Wire(AWG)	20~4	
Connection Points	3	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	400	
Central Marker		
ZB12	Pcs/Bag	100
Side Marker		
ZBF12	Pcs/Bag	100



FJ7-1.5K
FJ7N-1.5K(UL)



FJ7-1.5K-PV
FJ7N-1.5K-PV(UL)



FJ7-1.5K/D
FJ7N-1.5K/D(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x65.4x41.1	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	16	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	1000	

ACCESSORIES

End Plate	Model	P7/1.5K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
	See Page 145	
Side Marker		
ZBF3.5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x65.4x41.1	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	16	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	1000	


ACCESSORIES

End Plate	Model	P7/1.5K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
	See Page 145	
Side Marker		
ZBF3.5	Pcs/Bag	100


CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x65.4x41.1	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	16	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	4	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	1000	

ACCESSORIES


End Plate	Model	P7/1.5K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
	See Page 145	
Side Marker		
ZBF3.5	Pcs/Bag	100

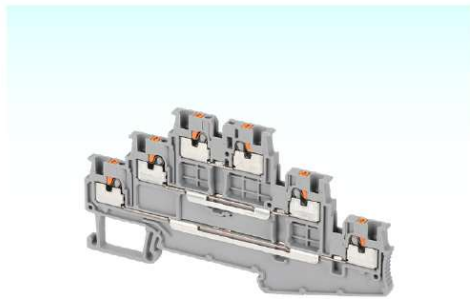

FJ7-1.5KK
FJ7N-1.5KK(UL)

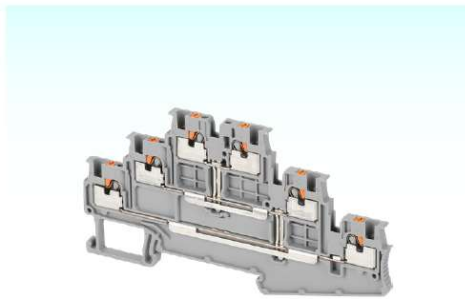

FJ7-1.5KK-PV
FJ7N-1.5KK-PV(UL)

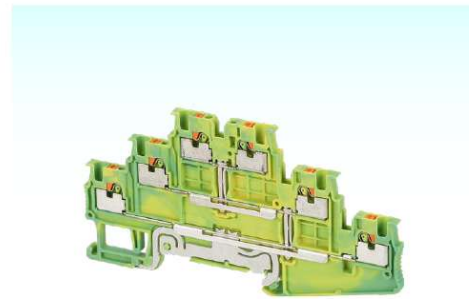

FJ7-1.5KK/D
FJ7N-1.5KK/D(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x97.2x51.7	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	15	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	6	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	1000	

ACCESSORIES

End Plate	Model	P7/1.5KK
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
	See Page 145	
Side Marker		
ZBF3.5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x97.2x51.7	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	15	15
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	6	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	1000	

ACCESSORIES

End Plate	Model	P7/1.5KK
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
	See Page 145	
Side Marker		
ZBF3.5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	3.5x97.2x51.7	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	15	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~1.5	
Imperial Wire(AWG)	26~14	
Connection Points	6	
PACKING		
Pcs/Inner Box	25	
Pcs/Master Carton	1000	

ACCESSORIES

End Plate	Model	P7/1.5KK
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-3.5	Positions	2
FJS3-3.5	Positions	3
FJS4-3.5	Positions	4
FJS5-3.5	Positions	5
FJS10-3.5	Positions	10
FJS20-3.5	Positions	20
FJS50-3.5	Positions	50
	See Page 145	
Side Marker		
ZBF3.5	Pcs/Bag	100



FJ7-2.5K
FJ7N-2.5K(UL)



FJ7-2.5K-PV
FJ7N-2.5K-PV(UL)



FJ7-2.5K/D
FJ7N-2.5/D(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x68x45.8	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	22	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	1275	

ACCESSORIES

End Plate	Model	P7/2.5K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
	See Page 145	
Side Marker		
ZBF5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x68x45.8	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	22	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	1275	

ACCESSORIES

End Plate	Model	P7/2.5K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
	See Page 145	
Side Marker		
ZBF5	Pcs/Bag	100


CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x68x45.8	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	22	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	75	
Pcs/Master Carton	1275	

ACCESSORIES

End Plate	Model	P7/2.5K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
	See Page 145	
Side Marker		
ZBF5	Pcs/Bag	100



FJ7-2.5KK
FJ7N-2.5KK(UL)



FJ7-2.5KK-PV
FJ7N-2.5KK-PV(UL)



FJ7-2.5KK/D
FJ7N-2.5KK/D(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x102x56.4	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	20	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	6	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	660	

ACCESSORIES

End Plate	Model	P7/2.5KK
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
	See Page 145	
Side Marker		
ZBF5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x102x56.4	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	20	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	6	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	660	

ACCESSORIES

End Plate	Model	P7/2.5KK
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
	See Page 145	
Side Marker		
ZBF5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x102x56.4	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	20	-
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	6	
PACKING		
Pcs/Inner Box	55	
Pcs/Master Carton	660	

ACCESSORIES

End Plate	Model	P7/2.5KK
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
	See Page 145	
Side Marker		
ZBF5	Pcs/Bag	100



FJ7-4K
FJ7N-4K(UL)



FJ7-4K-PV
FJ7N-4K-PV(UL)



FJ7-4K/D
FJ7N-4K/D(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x83.5x47.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	28	30
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	4	
PACKING		
Pcs/Inner Box	28	
Pcs/Master Carton	476	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x83.5x47.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	600
Current(A)	28	30
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	4	
PACKING		
Pcs/Inner Box	28	
Pcs/Master Carton	476	

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x83.5x47.5	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Earthing Clamper	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-2	UL 1059
Voltage(V)	-	-
Current(A)	28	-
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	4	
PACKING		
Pcs/Inner Box	28	
Pcs/Master Carton	476	

ACCESSORIES


End Plate	Model	P7/4K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
	See Page 145	
Side Marker		
ZBF6	Pcs/Bag	100

ACCESSORIES


End Plate	Model	P7/4K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
	See Page 145	
Side Marker		
ZBF6	Pcs/Bag	100

ACCESSORIES


End Plate	Model	P7/4K
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
	See Page 145	
Side Marker		
ZBF6	Pcs/Bag	100



FJ7-2.5-MT
FJ7N-2.5-MT(UL)



FJ7-2.5/3-MT
FJ7N-2.5/3-MT(UL)



FJ7-2.5/4-MT
FJ7N-2.5/4-MT(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x62x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	400	300
Current(A)	20	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	2	
PACKING		
Pcs/Inner Box	84	
Pcs/Master Carton	1764	

ACCESSORIES

End Plate	Model	P7/2.5-MT
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
See Page 145		
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x74x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	400	300
Current(A)	20	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	3	
PACKING		
Pcs/Inner Box	72	
Pcs/Master Carton	1512	


ACCESSORIES

End Plate	Model	P7-2.5/3-MT
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
See Page 145		
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	5.2x84x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	400	300
Current(A)	20	20
WIRING DATA		
Strip Length(mm)	8~10	
Metric Wire(mm ²)	0.14~2.5	
Imperial Wire(AWG)	26~12	
Connection Points	4	
PACKING		
Pcs/Inner Box	58	
Pcs/Master Carton	1218	

ACCESSORIES

End Plate	Model	P7-2.5/4-MT
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-5	Positions	2
FJS3-5	Positions	3
FJS4-5	Positions	4
FJS5-5	Positions	5
FJS10-5	Positions	10
FJS20-5	Positions	20
FJS50-5	Positions	50
See Page 145		
Central Marker		
ZB5	Pcs/Bag	100
Side Marker		
ZBF5	Pcs/Bag	100




FJ7-4-MT
FJ7N-4-MT(UL)

CERTIFICATION	UL/CB/CE/UKCA/RoHS	
MATERIAL		
Size(mm)	6.2x56xX35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-1	UL 1059
Voltage(V)	500	300
Current(A)	20	20
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	80	
Pcs/Master Carton	1680	

ACCESSORIES

End Plate		
	Model	P7/4
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
See Page 145		
Side Marker		
ZBF6	Pcs/Bag	100

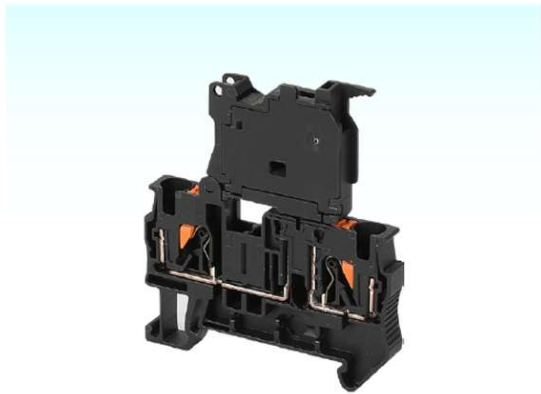

FJ7-4HESI
FJ7N-4HESI(UL)



FJ7-C-4HESI
FJ7N-C-4HESI(UL)

CERTIFICATION	UL/CE/RoHS	
MATERIAL		
Size(mm)	6.2x56x57.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-3	UL 1059
Voltage(V)	500	300
Current(A)	6.3(G/5X20)	6.3
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	42	
Pcs/Master Carton	756	

CERTIFICATION	UL/CE/RoHS	
MATERIAL		
Size(mm)	8.2x67.8x35.3	
Clamping Spring	Stainless Steel	
Conductor	Tin-Coated Copper	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60947-7-3	UL 1059
Voltage(V)	500	300
Current(A)	6.3(G/5X20)	6.3
WIRING DATA		
Strip Length(mm)	10~12	
Metric Wire(mm ²)	0.2~4	
Imperial Wire(AWG)	24~10	
Connection Points	2	
PACKING		
Pcs/Inner Box	37	
Pcs/Master Carton	814	

ACCESSORIES

End Plate		
	Model	P7/4
	Thickness	2.2mm
	Pcs/Bag	100
Plug-In Bridge		
FJS2-6	Positions	2
FJS3-6	Positions	3
FJS4-6	Positions	4
FJS5-6	Positions	5
FJS10-6	Positions	10
FJS20-6	Positions	20
See Page 145		
Central Marker		
ZB6	Pcs/Bag	100
Side Marker		
ZBF6	Pcs/Bag	100

ACCESSORIES

End Plate		
	Model	P7-C-4HESI
	Thickness	2.2mm
	Pcs/Bag	100
Side Marker		
ZBF8	Pcs/Bag	100



FJS2-3.5



FJS3-3.5



FJS4-3.5



FJS5-3.5



FJS10-3.5

CERTIFICATION	RoHS	RoHS	RoHS	RoHS	RoHS
2.5mm² BRIDGE					
Positions	2	3	4	5	10
Material	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0
PACKING					
Pcs/Bag	100	100	100	100	50



FJS20-3.5



FJS50-3.5

CERTIFICATION	RoHS	RoHS
4mm² BRIDGE		
Positions	20	50
Material	Copper PA66/V-0	Copper PA66/V-0
PACKING		
Pcs/Bag	20	20



FJS2-4




FJS3-4



FJS4-4



FJS5-4



FJS10-4

CERTIFICATION	RoHS	RoHS	RoHS	RoHS	RoHS
6mm² BRIDGE					
Positions	2	3	4	5	10
Material	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0
PACKING					
Pcs/Bag	100	100	100	100	50



FJS2-5



FJS3-5



FJS4-5



FJS5-5



FJS10-5

CERTIFICATION	RoHS	RoHS	RoHS	RoHS	RoHS
2.5mm ² BRIDGE					
Positions	2	3	4	5	10
Material	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0
PACKING					
Pcs/Bag	100	100	100	100	50



FJS20-5



FJS50-5

CERTIFICATION	RoHS	RoHS
4mm ² BRIDGE		
Positions	20	50
Material	Copper PA66/V-0	Copper PA66/V-0
PACKING		
Pcs/Bag	20	20



FJS2-6



FJS3-6



FJS4-6



FJS5-6



FJS10-6

CERTIFICATION	RoHS	RoHS	RoHS	RoHS	RoHS
6mm ² BRIDGE					
Positions	2	3	4	5	10
Material	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0
PACKING					
Pcs/Bag	100	100	100	100	50



FJS20-6

CERTIFICATION	RoHS
2.5mm ² BRIDGE	
Positions	20
Material	Copper PA66/V-0
PACKING	
Pcs/Bag	20



FJS2-8




FJS3-8



FJS4-8



FJS5-8



FJS10-8

CERTIFICATION	RoHS	RoHS	RoHS	RoHS	RoHS
4mm ² BRIDGE					
Positions	2	3	4	5	10
Material	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0
PACKING					
Pcs/Bag	100	100	100	100	50




FJS2-10



FJS3-10



FJS5-10



FJS10-10



FJS2-12

CERTIFICATION	RoHS	RoHS	RoHS	RoHS	RoHS
6mm ² BRIDGE					
Positions	2	3	5	10	2
Material	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0	Copper PA66/V-0
PACKING					
Pcs/Bag	100	100	100	50	100



ZB-2.5K

ZB-2.5KK

ZB-4K

CERTIFICATION	RoHS	RoHS	RoHS
CARRIER			
Material	PA66/V-0	PA66/V-0	PA66/V-0
PACKING			
Pcs/Bag	100	100	100



E/119(L)

E/119(R)

E/117


CERTIFICATION	RoHS	RoHS	RoHS
END STOP			
Size(mm)	10x45x28	10x45x28	9x47x33
Material	PA66/V-0	PA66/V-0	PA66/V-0
PACKING			
Pcs/Bag	100	100	100




KLM-A See Page 84

[SECTIONAL TERMINAL BLOCKS]



> Sectional terminal blocks are the featured products with very large conductor cross sections and current ranges. The maximum load current can be up to 370A . In addition to the terminal blocks for rail mounting, the high current terminal blocks also can be assembled onto the mounting plate directly.

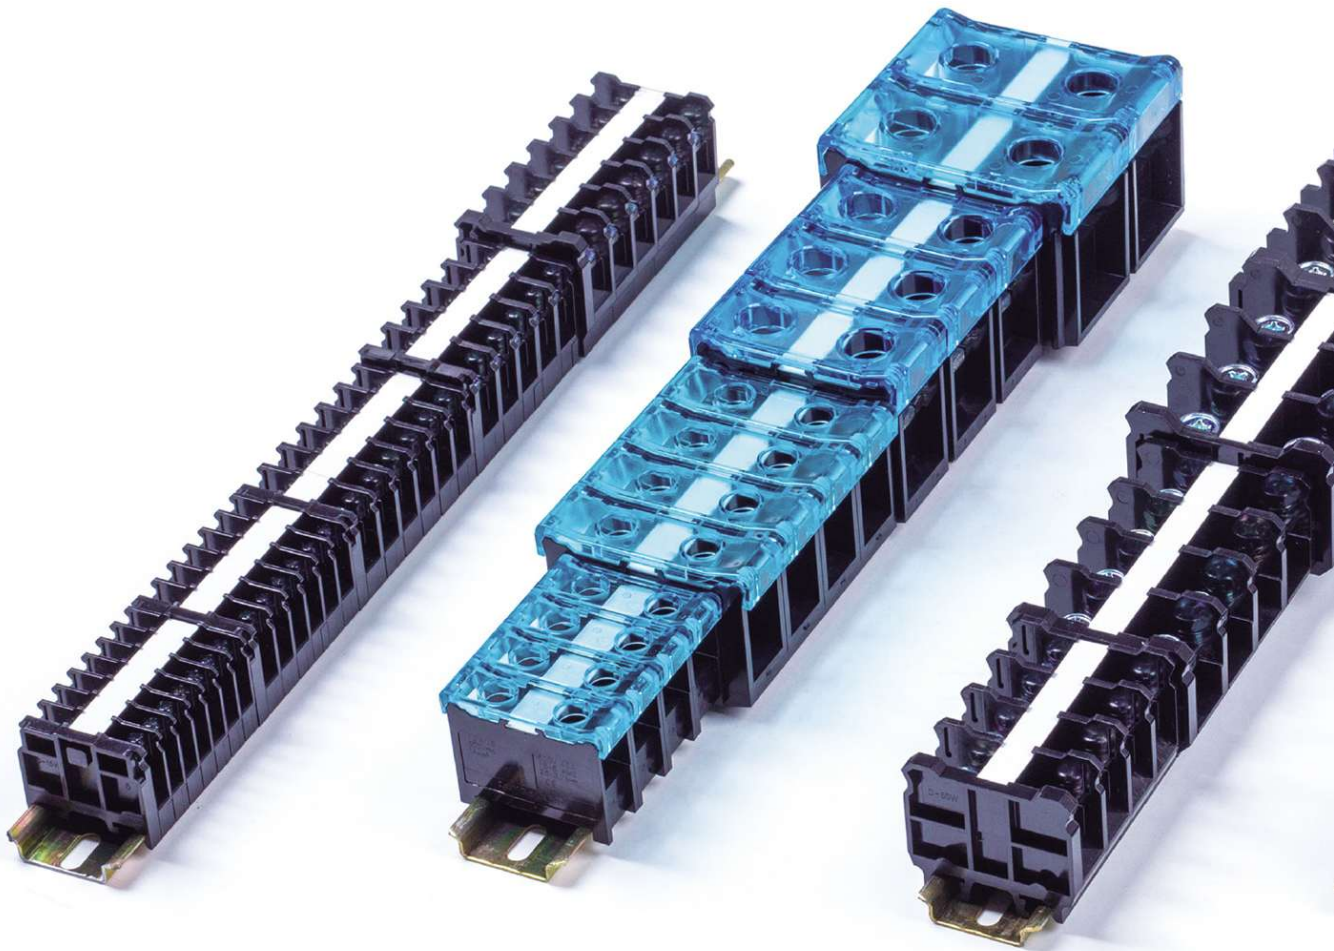

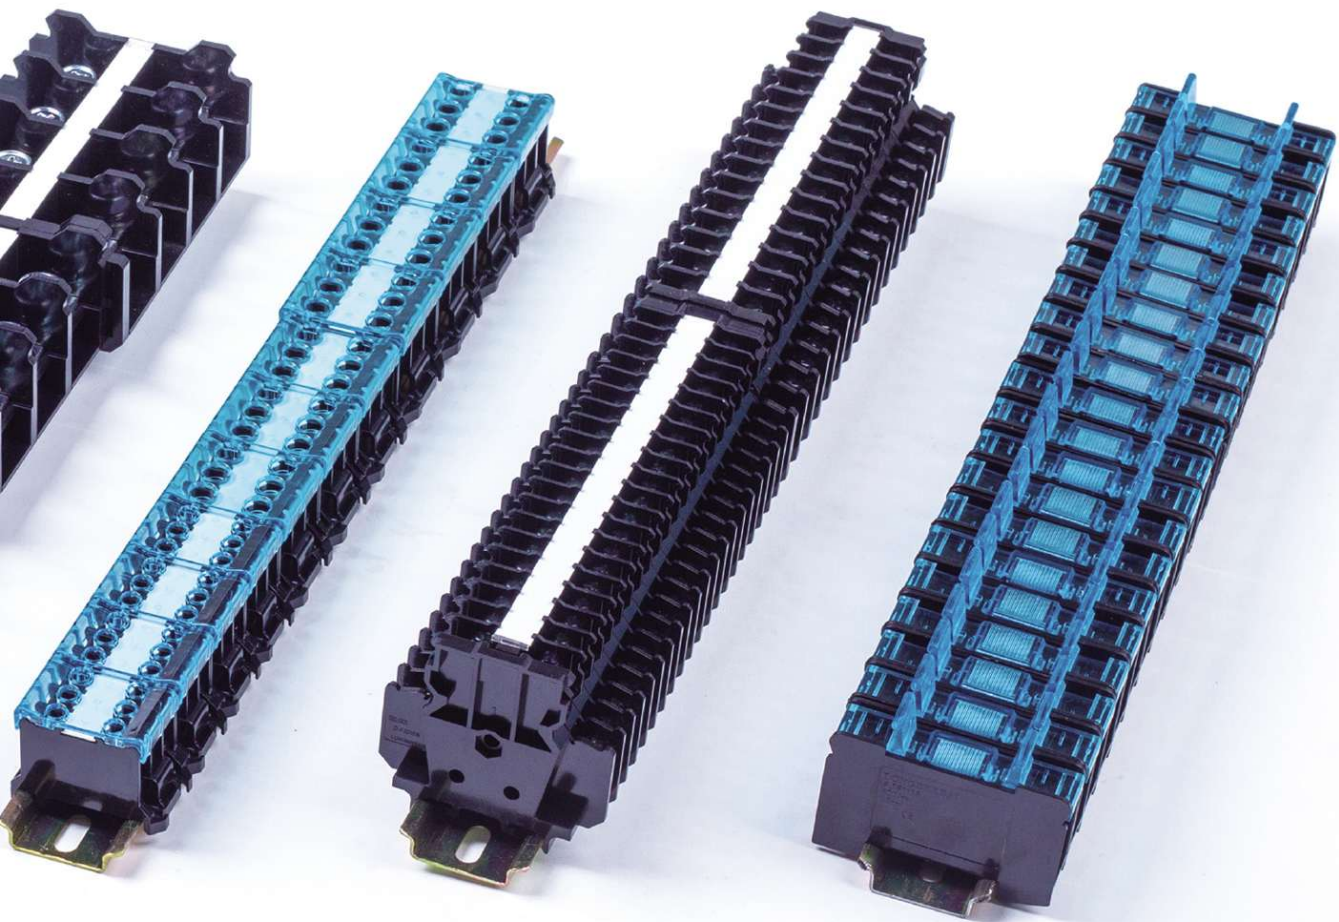


[FJ-W SERIES UNIVERSAL TERMINAL BLOCKS]

FJ-W series universal terminal blocks, the insulating housings are made of halogen-free and high-grade PC, this material is cheaper than PA66, your sourcing costs can be reduced considerably. The transparent dust cover for each type provides better visibility to the inside of the terminal blocks and more convenient to inspect and repair.

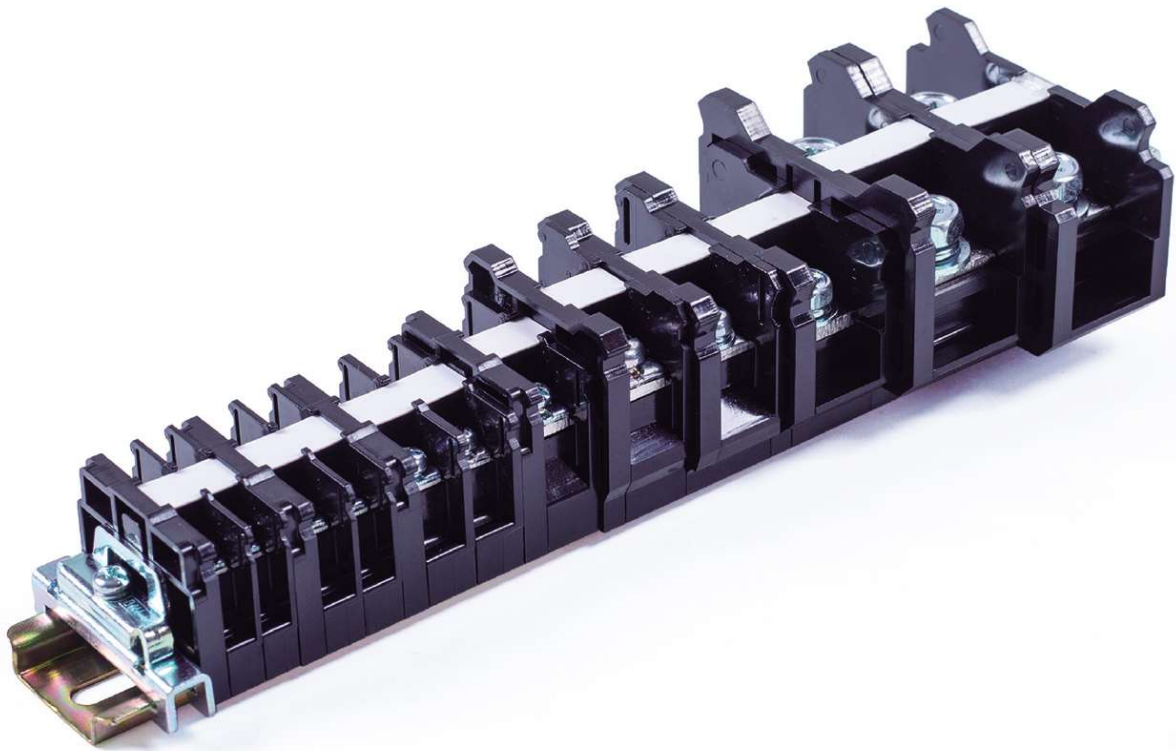

Installation on the Rail



Removal of Terminal Blocks



Usage of Marking Strips Fastener



FJ10W



FJ15MW



FJ15LW

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	7x38x32.5	
Screw	M3, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	16	16
WIRING DATA		
Metric Wire(mm ²)	1.25	
Imperial Wire(AWG)	22~16	
Applicable Terminals	1.25-3	
Connection Points	2	
Torque(N·m)	0.6~1.0	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	4200	

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	8x38x32.5	
Screw	M3, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	16	22
WIRING DATA		
Metric Wire(mm ²)	1.25 (Max 2mm ²)	
Imperial Wire(AWG)	22~14	
Applicable Terminals	1.25-3(2-3)	
Connection Points	2	
Torque(N·m)	0.6~1.0	
PACKING		
Pcs/Inner Box	50	
Pcs/Master Carton	3700	

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	10.5x38x32.5	
Screw	M3.5, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	21	22
WIRING DATA		
Metric Wire(mm ²)	2	
Imperial Wire(AWG)	22~14	
Applicable Terminals	2-3.5	
Connection Points	2	
Torque(N·m)	1.0~1.3	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	2880	

ACCESSORIES

End Plate	Model	D-FJ15W
	Thickness	5mm
	Pcs/Bag	100
Dust Cover	Model	BNC230
	Length	1m
	Pcs/Carton	500
End Stop	Model	BNL6
	Material	Steel
	Pcs/Bag	100
Jumper	Model	BNJ16FB
	Max Current	10A
	Pcs/Bag	20

ACCESSORIES

End Plate	Model	D-FJ15W
	Thickness	5mm
	Pcs/Bag	100
Dust Cover	Model	BNC230
	Length	1m
	Pcs/Carton	500
End Stop	Model	BNL6
	Material	Steel
	Pcs/Bag	100
Jumper	Model	BNJ26FWB
	Max Current	20A
	Pcs/Bag	20

ACCESSORIES

End Plate	Model	D-FJ15W
	Thickness	5mm
	Pcs/Bag	100
Dust Cover	Model	BNC230
	Length	1m
	Pcs/Carton	500
End Stop	Model	BNL6
	Material	Steel
	Pcs/Bag	100
Jumper	Model	BNJ46FB
	Max Current	20A
	Pcs/Bag	20



FJ30W

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	12x38x35.5	
Screw	M4, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	40	38
WIRING DATA		
Metric Wire(mm ²)	5.5	
Imperial Wire(AWG)	18~10	
Applicable Terminals	1.25-4~5.5-4	
Connection Points	2	
Torque(N·m)	1.4~2.0	
PACKING		
Pcs/Inner Box	40	
Pcs/Master Carton	2480	

ACCESSORIES

	Model	D-FJ30W
	Thickness	5mm
	Pcs/Bag	100
	Model	BNC230
	Length	1m
	Pcs/Carton	500
	Model	BNL6
	Material	Steel
	Pcs/Bag	100
	Model	BNJ56FB
	Max Current	30A
	Pcs/Bag	20



FJ40W

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	14x43x42.5	
Screw	M5, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	50	50
WIRING DATA		
Metric Wire(mm ²)	8	
Imperial Wire(AWG)	16~8	
Applicable Terminals	1.25-5~8-5	
Connection Points	2	
Torque(N·m)	2.6~3.7	
PACKING		
Pcs/Inner Box	30	
Pcs/Master Carton	1560	

ACCESSORIES





	Model	D-FJ40W
	Thickness	5mm
	Pcs/Bag	100
	Model	BNC330
	Length	1m
	Pcs/Carton	500
	Model	BNL6
	Material	Steel
	Pcs/Bag	100
	Model	-
	Max Current	-
	Pcs/Bag	-



FJ50W

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	15.5x48x42.5	
Screw	M5, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	70	67
WIRING DATA		
Metric Wire(mm ²)	14	
Imperial Wire(AWG)	16~6	
Applicable Terminals	1.25-5~14-5	
Connection Points	2	
Torque(N·m)	2.6~3.7	
PACKING		
Pcs/Inner Box	30	
Pcs/Master Carton	1200	

ACCESSORIES

	Model	D-FJ50W
	Thickness	5mm
	Pcs/Bag	100
	Model	BNC320
	Length	1m
	Pcs/Carton	500
	Model	BNL8
	Material	Steel
	Pcs/Bag	30
	Model	-
	Max Current	-
	Pcs/Bag	-



FJ75W



FJ100W



FJ150W

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	20x53x41.5	
Screw	M6, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	94	94
WIRING DATA		
Metric Wire(mm ²)	22	
Imperial Wire(AWG)	16~4	
Applicable Terminals	2-6~22-6	
Connection Points	2	
Torque(N·m)	3.9~5.4	
PACKING		
Pcs/Inner Box	20	
Pcs/Master Carton	880	

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	26x50.5x63	
Screw	M8, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	132	132
WIRING DATA		
Metric Wire(mm ²)	38	
Imperial Wire(AWG)	16~2	
Applicable Terminals	2-8~38-8	
Connection Points	2	
Torque(N·m)	10~13.5	
PACKING		
Pcs/Inner Box	10	
Pcs/Master Carton	170	

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	26x74x50.5	
Screw	M8, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	IEC 60947-7-1
Voltage(V)	600	660
Current(A)	175	175
WIRING DATA		
Metric Wire(mm ²)	60	
Imperial Wire(AWG)	16~1/0	
Applicable Terminals	2-8~60-8	
Connection Points	2	
Torque(N·m)	10~13.5	
PACKING		
Pcs/Inner Box	10	
Pcs/Master Carton	210	

ACCESSORIES

End Plate	Model	
	D-FJ75W	
	Thickness	5mm
	Pcs/Bag	100
Dust Cover	Model	
	BNC420	
	Length	1m
	Pcs/Carton	500
End Stop	Model	
	BNL8	
	Material	Steel
	Pcs/Bag	30
Jumper	Model	
—	—	-
	Max Current	-
	Pcs/Bag	-

ACCESSORIES

End Plate	Model	
	D-FJ100W	
	Thickness	5mm
	Pcs/Bag	100
Dust Cover	Model	
	BNC520	
	Length	1m
	Pcs/Carton	500
End Stop	Model	
	BNL8	
	Material	Steel
	Pcs/Bag	30
Jumper	Model	
—	—	-
	Max Current	-
	Pcs/Bag	-

ACCESSORIES


End Plate	Model	
	D-FJ150W	
	Thickness	5mm
	Pcs/Bag	50
Dust Cover	Model	
	BNC520	
	Length	1m
	Pcs/Carton	500
End Stop	Model	
	BNL8	
	Material	Steel
	Pcs/Bag	30
Jumper	Model	
—	—	-
	Max Current	-
	Pcs/Bag	-



TK030


CERTIFICATION		CE/RoHS	
MATERIAL			
Size(mm)	11x38x33.5		
Screw	M4, Zinc-Coated Steel		
Conductor	Nickel-Coated Brass		
Housing	PC		
ELECTRICAL DATA			
Standards	IEC 60947-7-1	UL 1059	
Voltage(V)	600	-	
Current(A)	30	-	
WIRING DATA			
Metric Wire(mm ²)	3.5		
Imperial Wire(AWG)	18~10		
Applicable Terminals	1.25-4~5.5-4		
Connection Points	2		
Torque(N·m)	0.8		
PACKING			
Pcs/Inner Box	40		
Pcs/Master Carton	2480		

ACCESSORIES

End Plate			
	Model	D-TK030	
	Thickness	5mm	
	Pcs/Bag	100	

[FJ-T SERIES FAST-MOUNTING TERMINAL BLOCKS]


The outstanding feature of FJ-T series fast-mounting terminal blocks is their auxiliary assembly keys, users are able to mount and remove the terminal blocks fast. A further characteristic is end plates unnecessary.

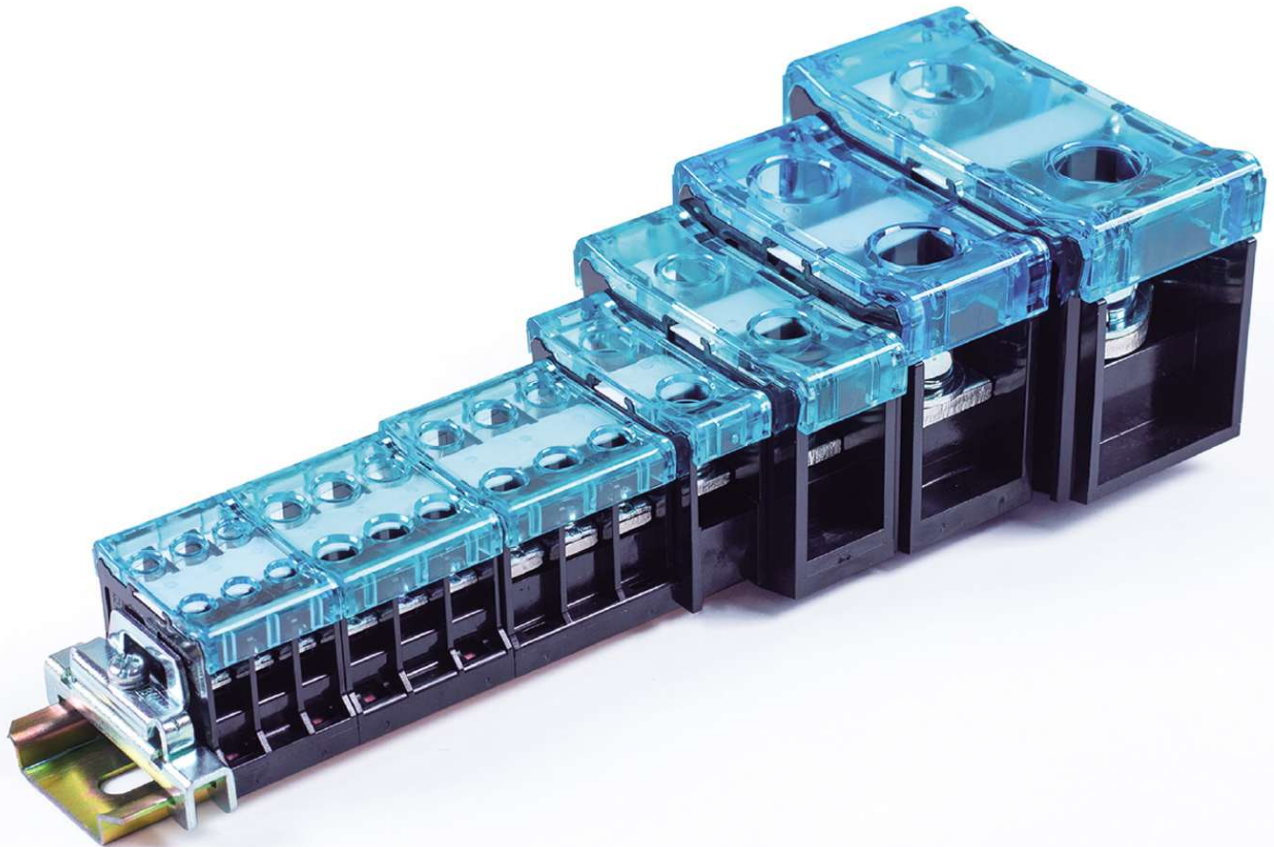

Usage of End Stop



Installation on the Rail

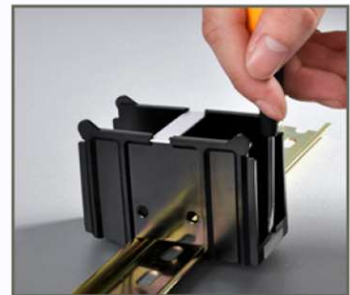

Removal of Terminal Blocks



FJ111T



FJ211T



FJ311T

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	25x42x31.2	
Screw	M3, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	UL 1059
Voltage(V)	600	300
Current(A)	16	15
Dielectric Strength	2500V AC, 1 Minute	
WIRING DATA		
Metric Wire(mm ²)	1.25(Max 2mm ²)	
Imperial Wire(AWG)	22~14	
Torque(N·m)	0.6~1.0	
PACKING		
Pcs/Inner Box	20	
Pcs/Master Carton	960	

ACCESSORIES

End Stop	Model	Material	Pcs/Bag
	BNL6	Steel	100

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	30.5x42x31	
Screw	M3.5, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	UL 1059
Voltage(V)	600	300
Current(A)	21	20
Dielectric Strength	2500V AC, 1 Minute	
WIRING DATA		
Metric Wire(mm ²)	2(Max 3.5mm ²)	
Imperial Wire(AWG)	22~12	
Torque(N·m)	1.0~1.3	
PACKING		
Pcs/Inner Box	21	
Pcs/Master Carton	840	

ACCESSORIES

End Stop	Model	Material	Pcs/Bag
	BNL6	Steel	100

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	34.5x42x32.5	
Screw	M4, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	UL 1059
Voltage(V)	600	150
Current(A)	40	30
Dielectric Strength	2500V AC, 1 Minute	
WIRING DATA		
Metric Wire(mm ²)	5.5	
Imperial Wire(AWG)	18~10	
Torque(N·m)	1.4~2.0	
PACKING		
Pcs/Inner Box	15	
Pcs/Master Carton	720	

ACCESSORIES

End Stop	Model	Material	Pcs/Bag
	BNL6	Steel	100



FJ411S

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	16x50x38	
Screw	M5, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	UL 1059
Voltage(V)	600	600
Current(A)	70	40
Dielectric Strength	2500V AC, 1 Minute	
WIRING DATA		
Metric Wire(mm ²)	14	
Imperial Wire(AWG)	16~6	
Torque(N·m)	2.6~3.7	
PACKING		
Pcs/Inner Box	26	
Pcs/Master Carton	1248	

ACCESSORIES

End Stop	Model	
	Model	BNL6
	Material	Steel
	Pcs/Bag	100



FJ611S

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	22x65x47	
Screw	M6, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	UL 1059
Voltage(V)	600	-
Current(A)	94	-
Dielectric Strength	2500V AC, 1 Minute	
WIRING DATA		
Metric Wire(mm ²)	22	
Imperial Wire(AWG)	8~4	
Torque(N·m)	3.9~5.4	
PACKING		
Pcs/Inner Box	20	
Pcs/Master Carton	240	

ACCESSORIES

End Stop	Model	
	Model	BNL6
	Material	Steel
	Pcs/Bag	100



FJ711S

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	32x65x55	
Screw	M8, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	UL 1059
Voltage(V)	600	-
Current(A)	132	-
Dielectric Strength	2500V AC, 1 Minute	
WIRING DATA		
Metric Wire(mm ²)	38	
Imperial Wire(AWG)	2	
Torque(N·m)	10~13.5	
PACKING		
Pcs/Inner Box	14	
Pcs/Master Carton	168	

ACCESSORIES


End Stop	Model	
	Model	BNL8
	Material	Steel
	Pcs/Bag	30



FJ811S

CERTIFICATION		CE/RoHS	
MATERIAL			
Size(mm)	42x85x62		
Screw	M10, Zinc-Coated Steel		
Conductor	Nickel-Coated Brass		
Housing	PC		
ELECTRICAL DATA			
Standards	JIS C 2811	UL 1059	
Voltage(V)	600	-	
Current(A)	240	-	
Dielectric Strength	2500V AC, 1 Minute		
WIRING DATA			
Metric Wire(mm ²)	100		
Imperial Wire(AWG)	4/0		
Torque(N·m)	21~28		
PACKING			
Pcs/Inner Box	7		
Pcs/Master Carton	84		

ACCESSORIES


End Stop			
	Model	BNL8	
	Material	Steel	
	Pcs/Bag	30	



FJ911S

CERTIFICATION		CE/RoHS	
MATERIAL			
Size(mm)	60x140x62		
Screw	M12, Zinc-Coated Steel		
Conductor	Nickel-Coated Brass		
Housing	PC		
ELECTRICAL DATA			
Standards	JIS C 2811	UL 1059	
Voltage(V)	600	-	
Current(A)	370	-	
Dielectric Strength	2500V AC, 1 Minute		
WIRING DATA			
Metric Wire(mm ²)	200		
Imperial Wire(AWG)	400MCM		
Torque(N·m)	38~49		
PACKING			
Pcs/Inner Box	5		
Pcs/Master Carton	50		



ACCESSORIES

End Stop			
	Model	BNL8	
	Material	Steel	
	Pcs/Bag	30	


[DOUBLE DECK TERMINAL BLOCKS]

Double deck terminal blocks, are available to be mounted on the DIN rails or onto mounting plates directly. Allow four conductors to be connected on two independent potentials. The upper level is offset laterally by half of the terminal blocks thickness, it's more convenient to wire connections.

[FJ-T FUSE TERMINAL BLOCKS]

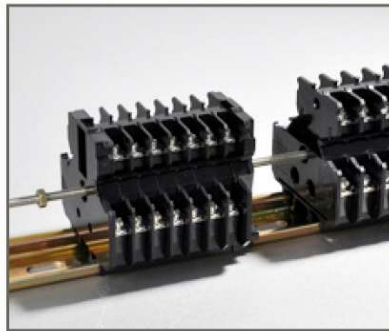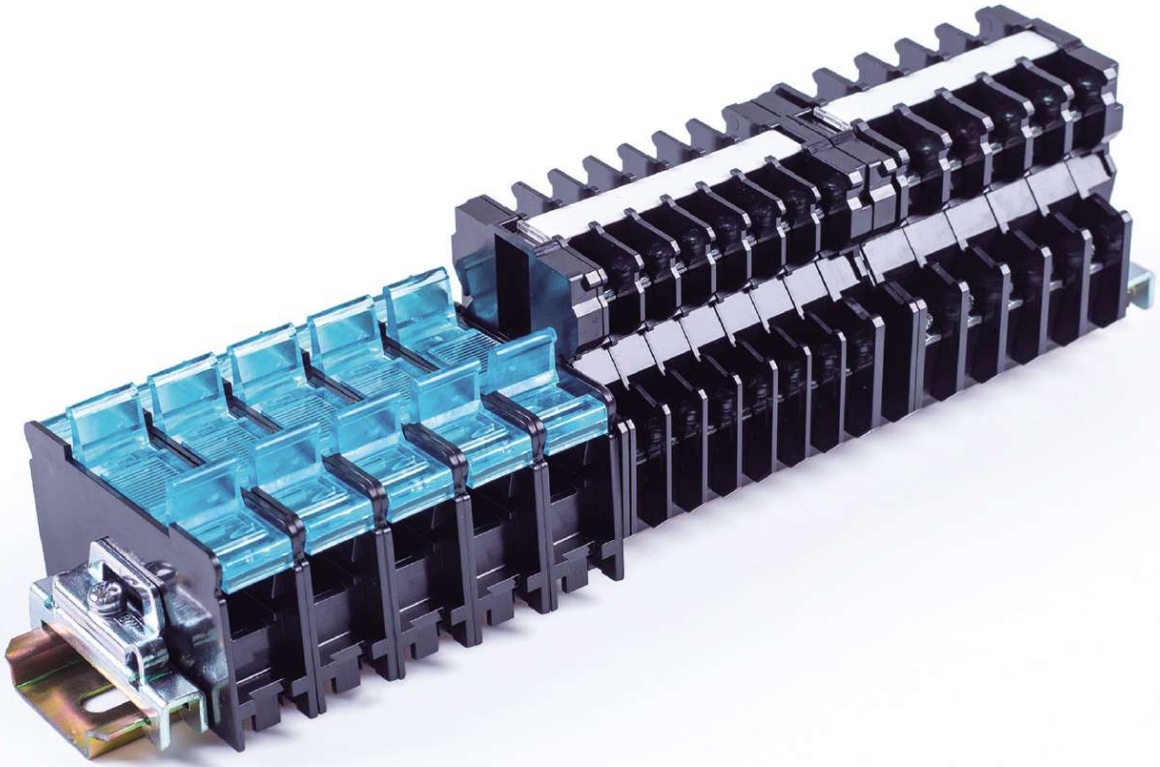

Installation on the Rail

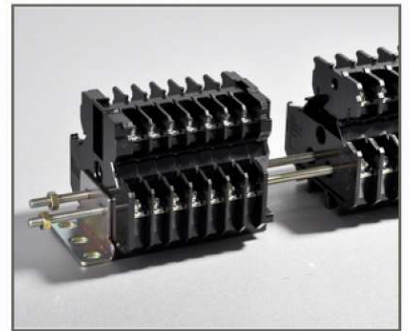

Installation on Mounting Plates



FJD15W

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	8x62x58.5	
Screw	M3, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	EN 60947-7-1
Voltage(V)	600	660
Current(A)	16	22
WIRING DATA		
Metric Wire(mm ²)	1.25 (Max 2mm ²)	
Imperial Wire(AWG)	22~14	
Applicable Terminals	1.25-3(2-3)	
Connection Points	4	
Torque(N·m)	0.6~1	
PACKING		
Pcs/Inner Box	60	
Pcs/Master Carton	1200	

ACCESSORIES

End Plate	D-FJD15W	D-FJD15W2
Thickness	9/5mm	
Pcs/Bag	50	
Dust Cover	BNC230	BNC240
Length	1m	
Pcs/Carton	500	
End Stop		
	Model	BNL8
	Material	Steel
	Pcs/Bag	30
Jumper		
	Model	BNJ26FWB
	Max Current	20A
	Pcs/Bag	20



FJD15LW

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	10.5x62x60.5	
Screw	M3.5, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	EN 60947-7-1
Voltage(V)	600	660
Current(A)	21	22
WIRING DATA		
Metric Wire(mm ²)	2	
Imperial Wire(AWG)	22~14	
Applicable Terminals	2-3.5	
Connection Points	4	
Torque(N·m)	1~1.3	
PACKING		
Pcs/Inner Box	48	
Pcs/Master Carton	960	

ACCESSORIES

End Plate	D-FJD15LW	
	Model	D-FJD15LW
	Thickness	9mm
	Pcs/Bag	50
Dust Cover	BNC230	BNC240
Length	1m	
Pcs/Carton	500	
End Stop		
	Model	BNL8
	Material	Steel
	Pcs/Bag	30
Jumper		
	Model	BNJ46FB
	Max Current	20A
	Pcs/Bag	20



FJF111S

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	16x63x46	
Screw	M4, Zinc-Coated Steel	
Conductor	Nickel-Coated Brass	
Housing	PC	
ELECTRICAL DATA		
Standards	JIS C 2811	UL 1059
Voltage(V)	600	-
Current(A)	10	-
WIRING DATA		
Metric Wire(mm ²)	5.5	
Imperial Wire(AWG)	18~10	
Applicable Terminals	1.25-4~5.5-4	
Connection Points	2	
Torque(N·m)	1.4~2.0	
PACKING		
Pcs/Inner Box	13	
Pcs/Master Carton	442	

ACCESSORIES

End Plate	FJF111S	
—	Model	-
—	Thickness	-
—	Pcs/Bag	-
Dust Cover		
—	Model	-
—	Length	-
—	Pcs/Carton	-
End Stop		
	Model	BNL8
	Material	Steel
	Pcs/Bag	30
Jumper		
—	Model	-
—	Max Current	-
—	Pcs/Bag	-



BNM7

CERTIFICATION	RoHS
MARKING STRIPS	
W/T(mm)	9.9x0.5
Length	130m
Material	PVC
Application	Universal



BNM3

CERTIFICATION	RoHS
FASTENER	
Material	PC
Application	BNM7



BND2

CERTIFICATION	RoHS
REMOVAL TOOL	
Size(mm)	23x92x24
Material	Steel
Application	FJ10W, FJ15MW FJ15LW, FJ30W



BNR1

CERTIFICATION	RoHS
CONNECTING RODS	
Nuts(mm)	M4x0.7
Material	Steel
Application	FJD15W, FJD15LW FJ811S, FJ911S



BNN1

CERTIFICATION	RoHS
CONNECTING NUTS	
Size(mm)	M4x0.7
Material	Steel
Application	BNR1, BAL3



BAL3




BNDL2

CERTIFICATION	RoHS	RoHS
SURFACE MOUNT BRACKET		
Matching	BNR1, BNN1	BNR1, BNN1
Material	Steel	Steel
Application	FJ811S, FJ911S	FJD15W, FJD15LW

[TRANSFORMER TERMINAL BLOCKS]

- > Transformer terminal blocks are specially designed for transformers, have screw connection and solder connection, Blox offers OEM and ODM services according to different drawings and requirements.

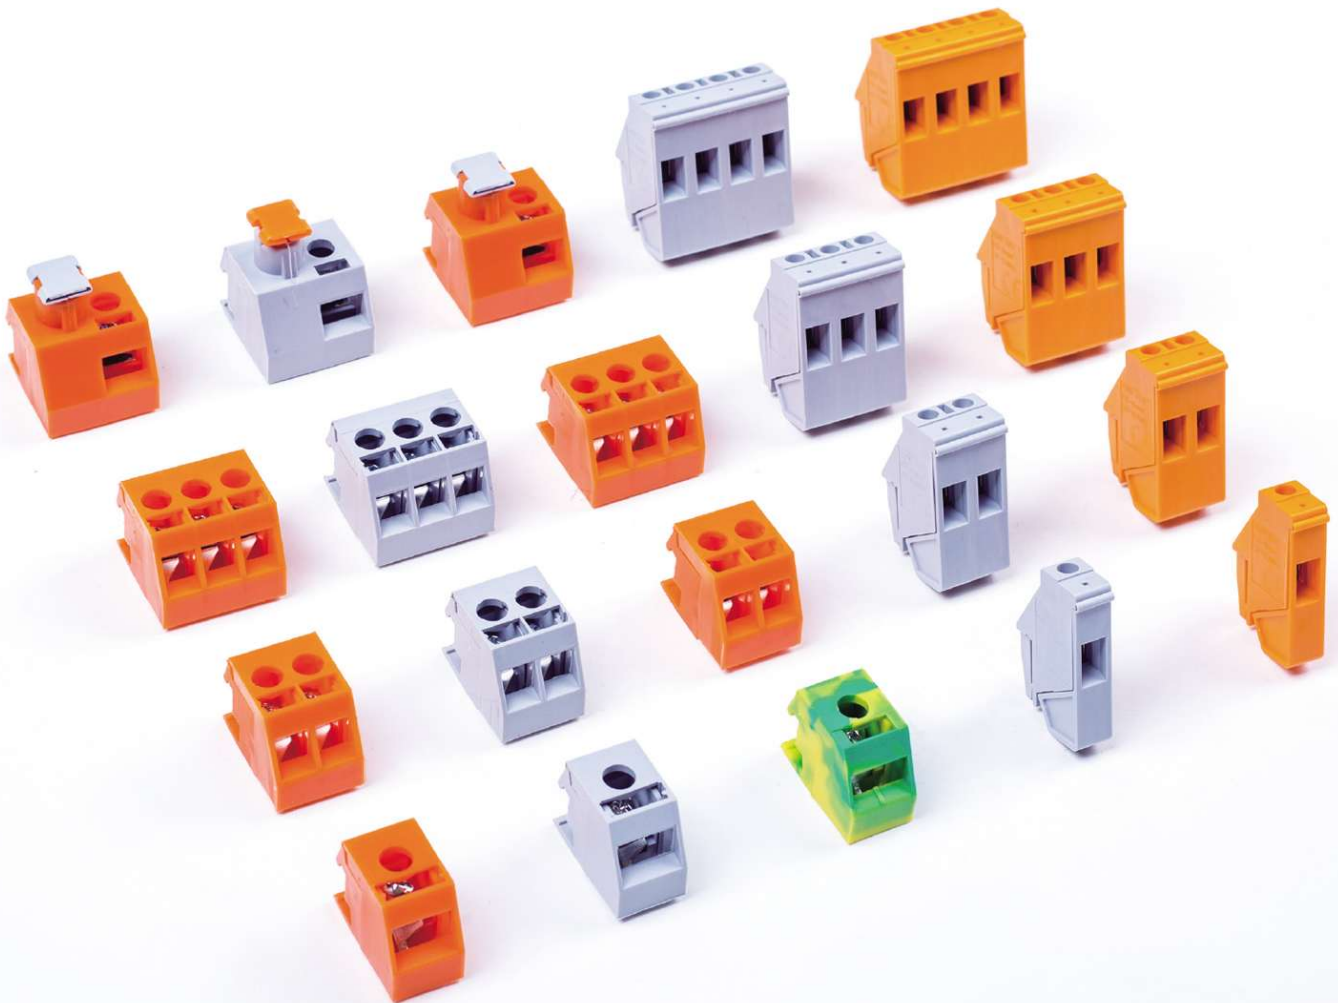



FJ-801



FJ-802



FJ-803

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	23.6x13x18	
Screw	Nickel-Coated Steel	
Clamping Plate	Zinc-Coated Steel	
Soldering Lug	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998	
Voltage(V)	750	
Current(A)	36	
WIRING DATA		
Strip Length(mm)	11~12	
Connecting	Screw	Min Soldering
Metric Wire(mm ²)	0.2~4	6
Imperial Wire(AWG)	16~12	8
Connection Points	1	
PACKING		
Pcs/Inner Box	120	
Pcs/Master Carton	6600	

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	23.6x16x18	
Screw	Nickel-Coated Steel	
Clamping Plate	Zinc-Coated Steel	
Soldering Lug	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998	
Voltage(V)	750	
Current(A)	20	
WIRING DATA		
Strip Length(mm)	9~10	
Connecting	Screw	Min Soldering
Metric Wire(mm ²)	0.2~2.5	2.5
Imperial Wire(AWG)	18~16	12
Connection Points	2	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	5500	

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	23.6x24x18	
Screw	Nickel-Coated Steel	
Clamping Plate	Zinc-Coated Steel	
Soldering Lug	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	8	
Standards	IEC 60998	
Voltage(V)	750	
Current(A)	20	
WIRING DATA		
Strip Length(mm)	9~10	
Connecting	Screw	Min Soldering
Metric Wire(mm ²)	0.2~2.5	2.5
Imperial Wire(AWG)	18~16	12
Connection Points	3	
PACKING		
Pcs/Inner Box	100	
Pcs/Master Carton	3400	

ACCESSORIES

Rails		
	Model	FJ-80xx
	Length	76~192mm
	Pcs/Bag	20
Rails		
	Model	FJ-90xx
	Length	78~192mm
	Pcs/Bag	20

ACCESSORIES

Rails		
	Model	FJ-80xx
	Length	76~192mm
	Pcs/Bag	20
Rails		
	Model	FJ-90xx
	Length	78~192mm
	Pcs/Bag	20

ACCESSORIES

Rails		
	Model	FJ-80xx
	Length	76~192mm
	Pcs/Bag	20
Rails		
	Model	FJ-90xx
	Length	78~192mm
	Pcs/Bag	20



FJ-805

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	23.4x22x26.5	
Screw	Nickel-Coated Steel	
Clamping Plate	Zinc-Coated Steel	
Soldering Lug	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	4	
Standards	IEC 60998	
Voltage(V)	250	
Current(A)	6.3	
WIRING DATA		
Strip Length(mm)	10~12	
Connecting	Screw	Min Soldering
Metric Wire(mm ²)	0.2~2.5	2.5
Imperial Wire(AWG)	16~12	12
Connection Points	1	
PACKING		
Pcs/Inner Box	90	
Pcs/Master Carton	2700	



FJ-811

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	32.9x7.6x21.7	
Screw	Nickel-Coated Steel	
Pressure Frame	Nickel-Coated Brass	
Soldering Lug	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60998	
Voltage(V)	450	
Current(A)	32	
WIRING DATA		
Strip Length(mm)	10~12	
Connecting	Screw	Min Soldering
Metric Wire(mm ²)	0.5~4	4
Imperial Wire(AWG)	20~10	10
Connection Points	1	
PACKING		
Pcs/Inner Box	300	
Pcs/Master Carton	9000	



FJ-812

CERTIFICATION	CE/RoHS	
MATERIAL		
Size(mm)	32.9x16.8x21.7	
Screw	Nickel-Coated Steel	
Pressure Frame	Nickel-Coated Brass	
Soldering Lug	Tin-Coated Brass	
Housing	PA66/V-0	
ELECTRICAL DATA		
Impulse Voltage(kV)	6	
Standards	IEC 60998	
Voltage(V)	450	
Current(A)	32	
WIRING DATA		
Strip Length(mm)	10~12	
Connecting	Screw	Min Soldering
Metric Wire(mm ²)	0.5~4	4
Imperial Wire(AWG)	20~10	10
Connection Points	2	
PACKING		
Pcs/Inner Box	150	
Pcs/Master Carton	4500	

ACCESSORIES

Rails		
	Model	FJ-80xx
	Length	76~192mm
	Pcs/Bag	20
Rails		
	Model	FJ-90xx
	Length	78~192mm
	Pcs/Bag	20



FJ-813

CERTIFICATION	CE/RoHS		
MATERIAL			
Size(mm)	32.9x22.6x21.7		
Screw	Nickel-Coated Steel		
Pressure Frame	Nickel-Coated Brass		
Soldering Lug	Tin-Coated Brass		
Housing	PA66/V-0		
ELECTRICAL DATA			
Impulse Voltage(kV)	6		
Standards	IEC 60998		
Voltage(V)	450		
Current(A)	32		
WIRING DATA			
Strip Length(mm)	10~12		
Connecting	Screw	Min Soldering	
Metric Wire(mm ²)	0.5~4	4	
Imperial Wire(AWG)	20~10	10	
Connection Points	3		
PACKING			
Pcs/Inner Box	100		
Pcs/Master Carton	3000		




FJ-814

CERTIFICATION	CE/RoHS		
MATERIAL			
Size(mm)	32.9x30.9x21.7		
Screw	Nickel-Coated Steel		
Pressure Frame	Nickel-Coated Brass		
Soldering Lug	Tin-Coated Brass		
Housing	PA66/V-0		
ELECTRICAL DATA			
Impulse Voltage(kV)	6		
Standards	IEC 60998		
Voltage(V)	450		
Current(A)	32		
WIRING DATA			
Strip Length(mm)	10~12		
Connecting	Screw	Min Soldering	
Metric Wire(mm ²)	0.5~4	4	
Imperial Wire(AWG)	20~10	10	
Connection Points	4		
PACKING			
Pcs/Inner Box	76		
Pcs/Master Carton	2280		



FJ-815

CERTIFICATION	CE/RoHS		
MATERIAL			
Size(mm)	37.5x15x20		
Screw	Nickel-Coated Steel		
Pressure Frame	Nickel-Coated Brass		
Soldering Lug	Tin-Coated Brass		
Housing	PA66/V-0		
ELECTRICAL DATA			
Impulse Voltage(kV)	6		
Standards	IEC 60998		
Voltage(V)	600		
Current(A)	10		
WIRING DATA			
Strip Length(mm)	10~12		
Connecting	Screw	Min Soldering	
Metric Wire(mm ²)	0.5~4	4	
Imperial Wire(AWG)	20~12	10	
Connection Points	1		
PACKING			
Pcs/Inner Box	150		
Pcs/Master Carton	4500		

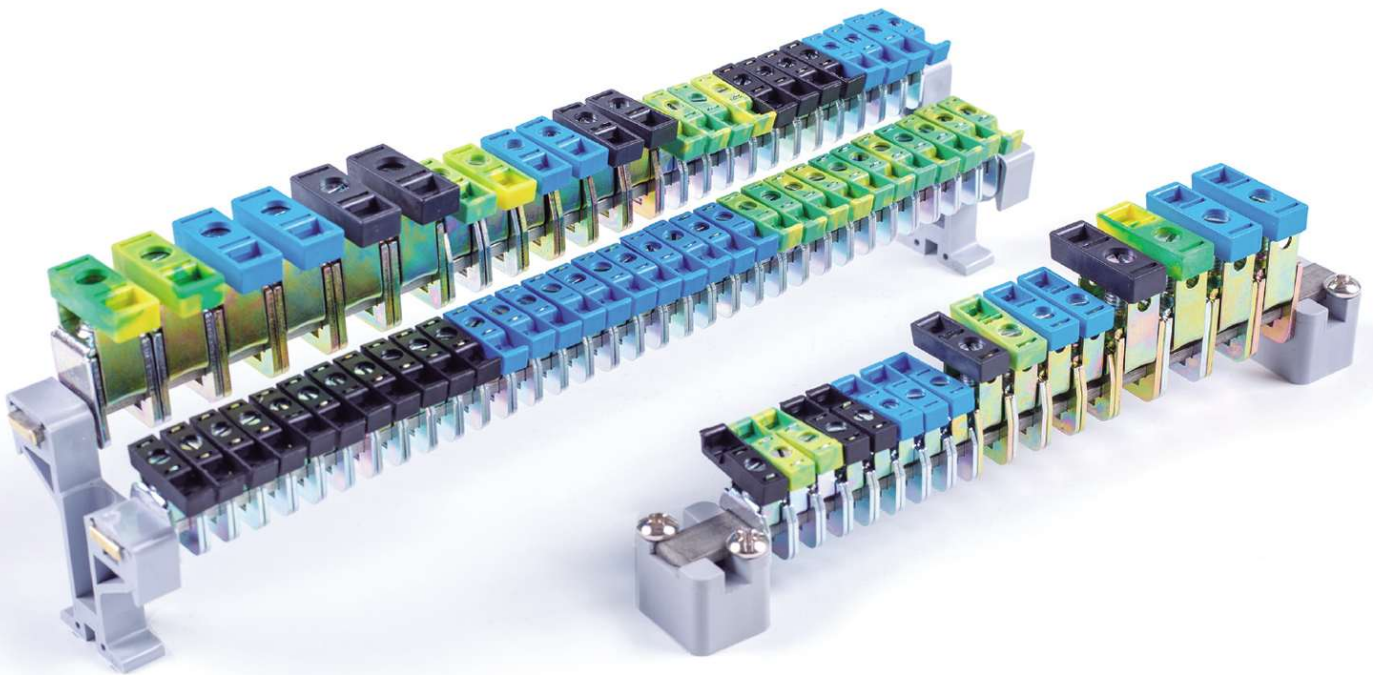

[BUSBAR TERMINAL BLOCKS]

- > Busbar terminals are widely used in construction, electrical devices such as low-voltage power box, distribution box, illuminated box etc. Manufactured by high-quality imported materials which allow low power consumption and low temperature rise.



FKG4

CERTIFICATION	CE/RoHS	
MATERIAL		
Length/Width(mm)	23.7x7	
Screw	M4, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Plastic Part	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	
Voltage(V)	300	
Current(A)	41	
WIRING DATA		
Strip Length(mm)	16	
Flexible/Rigid (mm ²)	0.5~4	0.5~6
Imperial Wire(AWG)	20~10	
Torque(N·m)	1.5~1.8	
PACKING		
Pcs/Bag	100	
Marking Tag		
ZB5	Pcs/Bag	100



FKG16

CERTIFICATION	CE/RoHS	
MATERIAL		
Length/Width(mm)	23.7x9.8	
Screw	M5, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Plastic Part	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	
Voltage(V)	300	
Current(A)	76	
WIRING DATA		
Strip Length(mm)	16	
Flexible/Rigid (mm ²)	1.5~16	1.5~16
Imperial Wire(AWG)	16~6	
Torque(N·m)	2.5~3	
PACKING		
Pcs/Bag	100	
Marking Tag		
ZB6	Pcs/Bag	100



FKG35

CERTIFICATION	CE/RoHS	
MATERIAL		
Length/Width(mm)	27x14.3	
Screw	M6, Zinc-Coated Steel	
Pressure Frame	Zinc-Coated Steel	
Plastic Part	PA66/V-0	
ELECTRICAL DATA		
Standards	IEC 60947-7-1	
Voltage(V)	300	
Current(A)	125	
WIRING DATA		
Strip Length(mm)	16	
Flexible/Rigid (mm ²)	2.5~35	2.5~35
Imperial Wire(AWG)	14~2	
Torque(N·m)	3.2~3.7	
PACKING		
Pcs/Bag	100	
Marking Tag		
ZB6	Pcs/Bag	100



BUSBAR

CERTIFICATION	RoHS
NEUTRAL BUSBAR	
Size(mm)	1000x10x3
Material	Nickel-Coated Brass
PACKING	
Pcs/Carton	30



AB/01

CERTIFICATION	RoHS
SUPPORT	
Screw	M5, Zinc-Coated Steel
Plastic Part	PA66/V-0
PACKING	
Pcs/Bag	100




AB/02

CERTIFICATION	RoHS
DOUBLE SUPPORT	
Height(mm)	49
Material	PA66/V-0
PACKING	
Pcs/Bag	50


[BRASS TERMINAL BLOCKS]


- > Brass terminal blocks are mostly used in electrical panels or power systems, made of selected brass and nylon 66. The stability and safety are much better than similar products in the market.

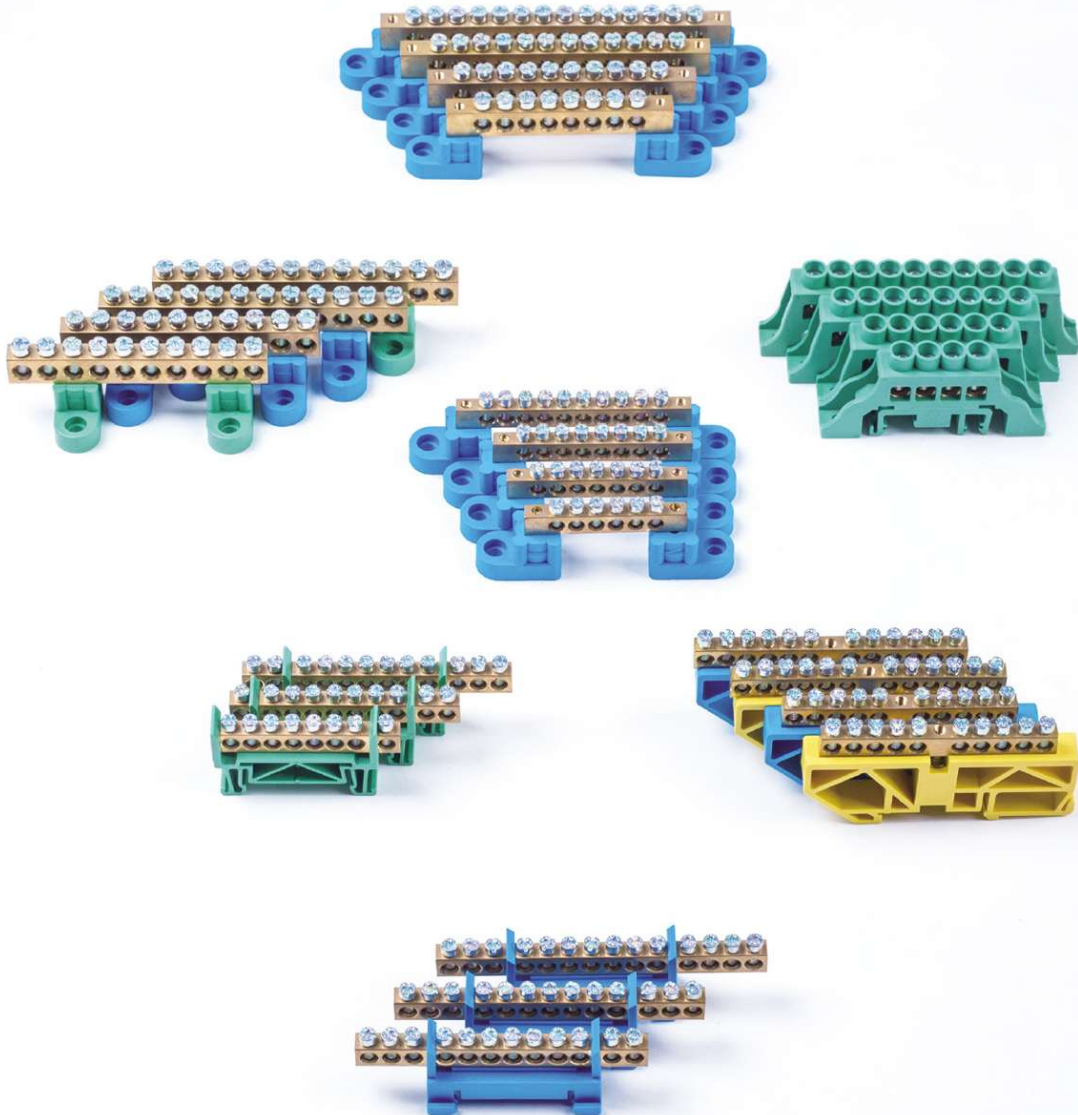


[BRASS TERMINAL BLOCKS]

- > Brass terminal blocks are mostly used in electrical panels or power systems, made of selected brass and nylon 66. The stability and safety are much better than similar products in the market.

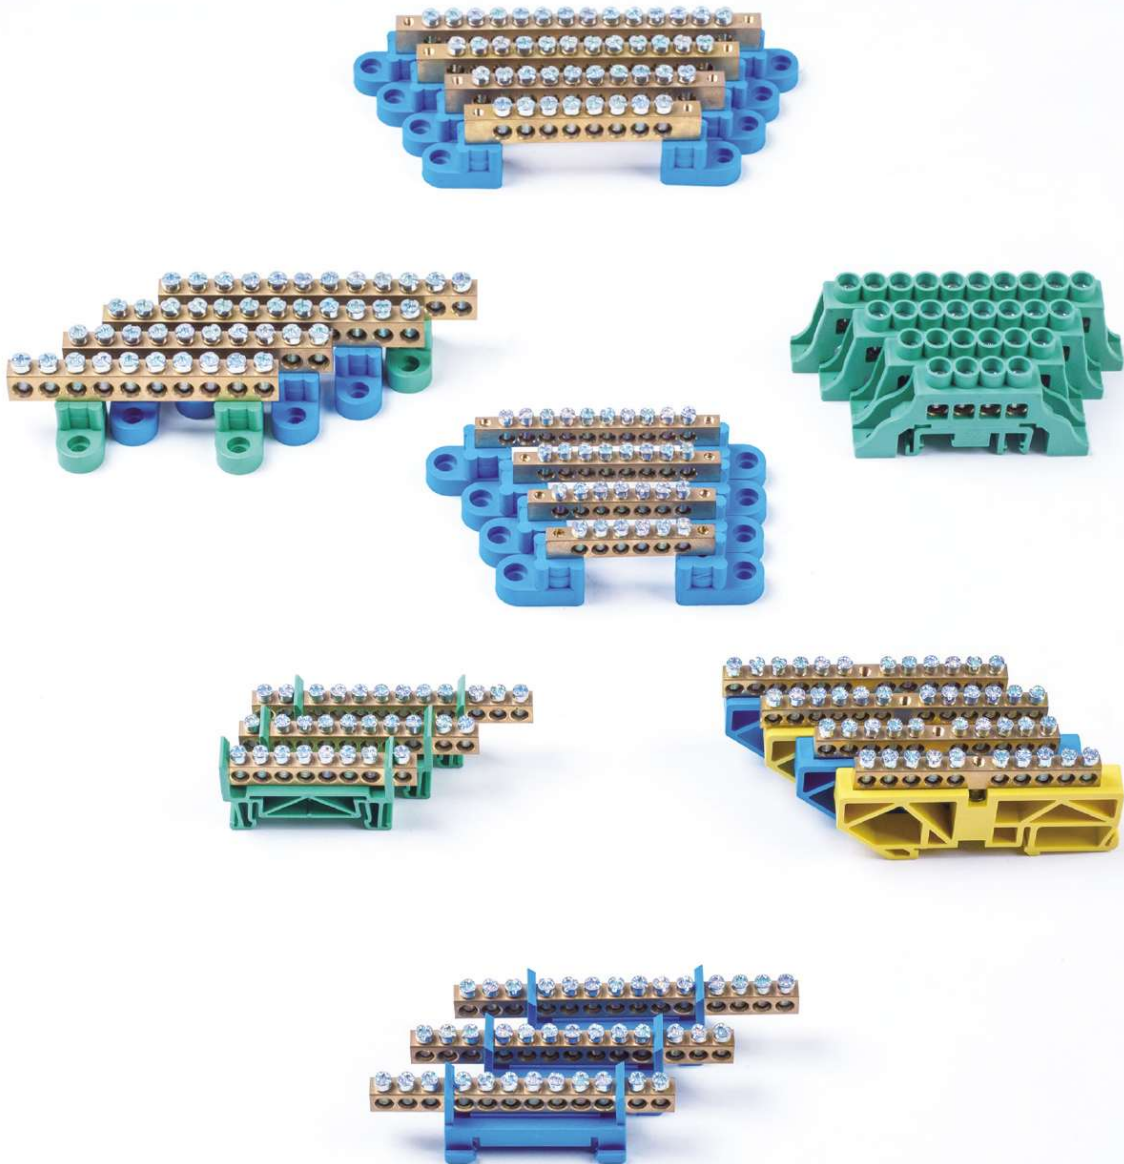

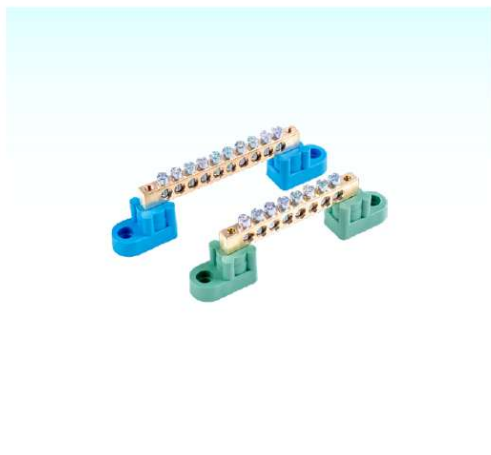

FKG2-S SERIES

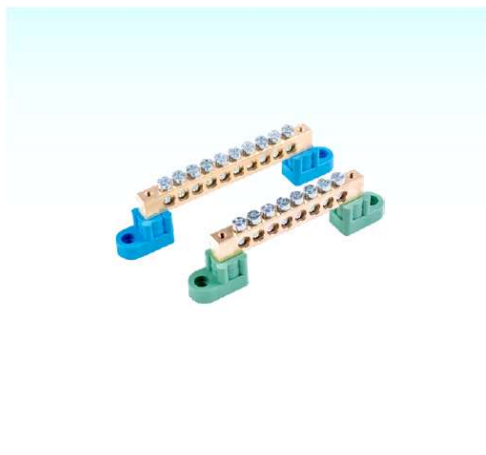

FKG2-L SERIES



FKG62-L SERIES

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M4, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~6		
SIZE			
Height/Width(mm)	30x16		
Diameter(mm)	5		
Model	Holes	Length	Pcs/Bag
FKG2-06S	6	88.5	20
FKG2-07S	7	95	20
FKG2-08S	8	101.5	20
FKG2-10S	10	114.5	20
FKG2-12S	12	127.5	20
FKG2-14S	14	138.5	20
FKG2-18S	18	162.5	20

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M5, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~16		
SIZE			
Height/Width(mm)	34x16		
Diameter(mm)	6.5		
Model	Holes	Length	Pcs/Bag
FKG2-06L	6	99.5	20
FKG2-07L	7	107.5	20
FKG2-08L	8	115.5	20
FKG2-10L	10	131.5	20
FKG2-12L	12	147.5	20
FKG2-14L	14	161	20
FKG2-18L	18	192	20

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M5, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~16		
SIZE			
Height/Width(mm)	34x28		
Diameter(mm)	6.5		
Model	Holes	Length	Pcs/Bag
FKG62-08L	8	74	20
FKG62-10L	10	88	20
FKG62-12L	12	106	20
FKG62-14L	14	122	20
FKG62-16L	16	138	20



FKGS-H SERIES



FKGL-H SERIES



FKGS-J SERIES

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M4, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~6		
SIZE			
Height/Width(mm)	43x12		
Diameter(mm)	5.2		
Model	Holes	Length	Pcs/Bag
FKG06S-H	6	85	20
FKG08S-H	8	85	20
FKG10S-H	10	85	20
FKG12S-H	12	85	20
FKG14S-H	14	99	20
FKG16S-H	16	110	20

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M5, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~16		
SIZE			
Height/Width(mm)	46x12		
Diameter(mm)	6.5		
Model	Holes	Length	Pcs/Bag
FKG06L-H	6	85	20
FKG08L-H	8	85	20
FKG10L-H	10	85	20
FKG12L-H	12	103	20
FKG14L-H	14	119	20
FKG16L-H	16	135	20

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M4, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~6		
SIZE			
Height/Width(mm)	31x11.5		
Diameter(mm)	5.3		
Model	Holes	Length	Pcs/Bag
FKG07S-J	7	51	20
FKG08S-J	8	59	20
FKG10S-J	10	72	20
FKG12S-J	12	85	20
FKG13S-J	13	98	20
FKG15S-J	15	104.5	20



FKGS-I SERIES

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M4, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~6		
SIZE			
Height/Width(mm)	28x20		
Diameter(mm)	5.3		
Model	Holes	Length	Pcs/Bag
FKG07S-I	7	51	20
FKG08S-I	8	59	20
FKG10S-I	10	72	20
FKG12S-I	12	85	20
FKG13S-I	13	98	20
FKG15S-I	15	104.5	20



FKGL-A SERIES

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M5, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~16		
SIZE			
Height/Width(mm)	37x12.5		
Diameter(mm)	7		
Model	Holes	Length	Pcs/Bag
FKG04L-A	4	59.5	20
FKG06L-A	6	76.5	20
FKG08L-A	8	93.5	20
FKG10L-A	10	110.5	20
FKG12L-A	12	127.5	20



FKGL-A/D SERIES
(Earthing)

CERTIFICATION	CE/RoHS		
MATERIAL			
Conductor	Brass		
Screw	M5, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~16		
SIZE			
Height/Width(mm)	37x12.5		
Diameter(mm)	7		
Model	Holes	Length	Pcs/Bag
FKG04L-A/D	4	59.5	20
FKG06L-A/D	6	76.5	20
FKG08L-A/D	8	93.5	20
FKG10L-A/D	10	110.5	20
FKG12L-A/D	12	127.5	20



FKGL-C SERIES

CERTIFICATION		CE/RoHS	
MATERIAL			
Conductor	Brass		
Screw	M5, Zinc-Coated Steel		
Plastic Part	PA66/V-0		
ELECTRICAL DATA			
Voltage(V)	250~400		
Metric Wire(mm ²)	2.5~16		
SIZE			
Height/Width(mm)	37x13		
Diameter(mm)	7		
Model	Holes	Length	Pcs/Box
FKG04L-C	4	57	24
FKG06L-C	6	57	30
FKG08L-C	8	78	18
FKG10L-C	10	89	20
FKG12L-C	12	102	18



[NEUTRAL TERMINAL BLOCKS]

> Neutral terminal blocks are developed for special purpose of neutral linking in electrical panels and equipments, ranging from 60A to 250A. Neutral link for current condition less than 100A, and neutral break for more than 100A in case there is any necessary to make an isolation break. Made of selected brass and nylon 66.



FJ-NL60

CERTIFICATION	CE/RoHS
MATERIAL	
Size(mm)	74x24x36
Conductor	Nickel-Coated Brass
Screw	M6, Zinc-Coated Steel
Bolt	10mm
Plastic Part	PA66/V-0
ELECTRICAL DATA	
Max Current(A)	60
Metric Wire(mm ²)	16
Connection Points	2
PACKING	
Pcs/Inner Box	15
Pcs/Master Carton	315



FJ-NL100

CERTIFICATION	CE/RoHS
MATERIAL	
Size(mm)	74x24x37
Conductor	Nickel-Coated Brass
Screw	M8, Zinc-Coated Steel
Bolt	13mm
Plastic Part	PA66/V-0
ELECTRICAL DATA	
Max Current(A)	100
Metric Wire(mm ²)	25
Connection Points	2
PACKING	
Pcs/Inner Box	15
Pcs/Master Carton	315



FJ-NB125

CERTIFICATION	CE/RoHS
MATERIAL	
Size(mm)	120x24x40
Conductor	Nickel-Coated Brass
Screw	M8, Zinc-Coated Steel
Bolt	13mm
Plastic Part	PA66/V-0
ELECTRICAL DATA	
Max Current(A)	125
Metric Wire(mm ²)	35
Connection Points	4
PACKING	
Pcs/Inner Box	10
Pcs/Master Carton	150



FJ-NB160



FJ-NB250

CERTIFICATION	CE/RoHS
MATERIAL	
Size(mm)	120x24x41
Conductor	Nickel-Coated Brass
Screw	M8, Zinc-Coated Steel
Bolt	13mm
Plastic Part	PA66/V-0
ELECTRICAL DATA	
Max Current(A)	160
Metric Wire(mm ²)	70
Connection Points	4
PACKING	
Pcs/Inner Box	10
Pcs/Master Carton	150

CERTIFICATION	CE/RoHS
MATERIAL	
Size(mm)	141x33x45
Conductor	Nickel-Coated Brass
Screw	M8, Zinc-Coated Steel
Bolt	13mm
Plastic Part	PA66/V-0
ELECTRICAL DATA	
Max Current(A)	250
Metric Wire(mm ²)	120
Connection Points	4
PACKING	
Pcs/Inner Box	6
Pcs/Master Carton	96