
HS GROUP

FEED THROUGH TERMINAL BLOCKS

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated



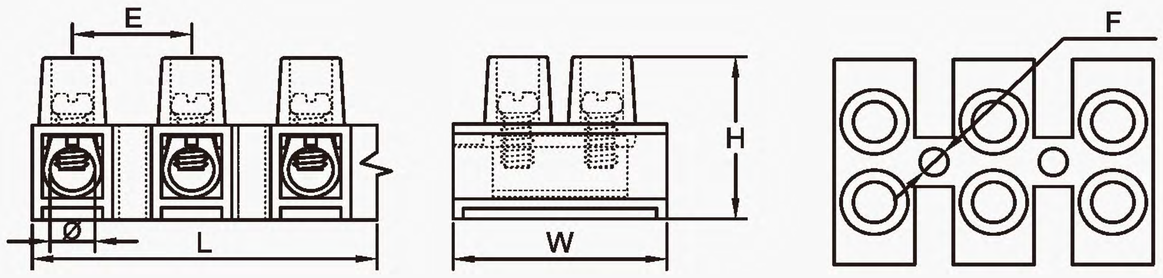


H Type Terminal Blocks <PE>
Working Temperature: –40℃ To 65℃
Color: ○ ● ● ● ● ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP001-01	2.5-4.0mm²	3A	400V	92.3	16.8	12.3	7.8	2.4	3.0	M2.5	1000
SP001-02	4.0-6.0mm²	6A	400V	115.4	18.8	15.4	9.6	2.7	3.3	M3.0	800
SP001-03	6.0-10.0mm²	10A	400V	129.3	20.7	16.5	11.0	2.8	4.2	M3.0	500
SP001-04	10-12mm²	15A	400V	137.8	22.5	18.6	11.7	3.1	4.5	M3.5	400
SP001-05	12-14mm²	20A	400V	138.0	22.5	19.0	12.0	3.2	4.5	M4.0	400
SP001-06	16mm²	30A	400V	164.0	22.5	20.0	13.7	3.4	5.5	M4.0	300
SP001-07	25mm²	60A	400V	186.0	29.2	25.3	15.7	3.3	6.5	M4.0	200
SP001-08	35mm²	80A	400V	226.8	36.1	29.0	19.2	4.0	8.0	M5.0	100
SP001-09	40mm²	100A	450V	254.6	45.0	34.7	20.5	3.7	9.0	M6.0	50

HS GROUP

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated




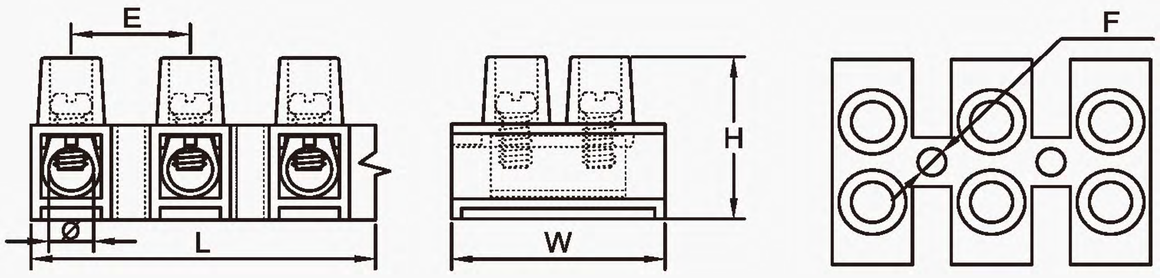


H Type Terminal Blocks <PP>
Glow Wire Test: 850℃
Color: ○ ● ● ● ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP001-20	2.5-4.0mm²	3A	400V	93.9	17.0	12.8	8.0	2.4	3.0	M2.5	1000
SP001-21	4.0-6.0mm²	6A	400V	116.6	19.0	15.5	9.9	2.7	3.3	M3.0	800
SP001-22	6.0-10.0mm²	10A	400V	131.5	21.0	16.3	11.5	2.8	4.2	M3.0	500
SP001-23	10-12mm²	15A	400V	139.8	22.8	18.9	12.0	3.1	4.5	M3.5	400
SP001-24	12-14mm²	20A	400V	140.2	22.9	20.3	12.2	3.2	4.5	M4.0	400
SP001-25	16mm²	30A	400V	167.5	25.9	20.2	14.2	3.4	5.5	M4.0	300
SP001-26	25mm²	60A	400V	189.0	29.7	25.8	15.7	3.3	6.5	M4.0	200
SP001-27	35mm²	80A	400V	231.0	36.7	29.6	19.5	3.7	8.0	M5.0	100
SP001-28	40mm²	100A	450V	256.0	45.5	35.6	22.0	4.0	9.0	M6.0	50

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated

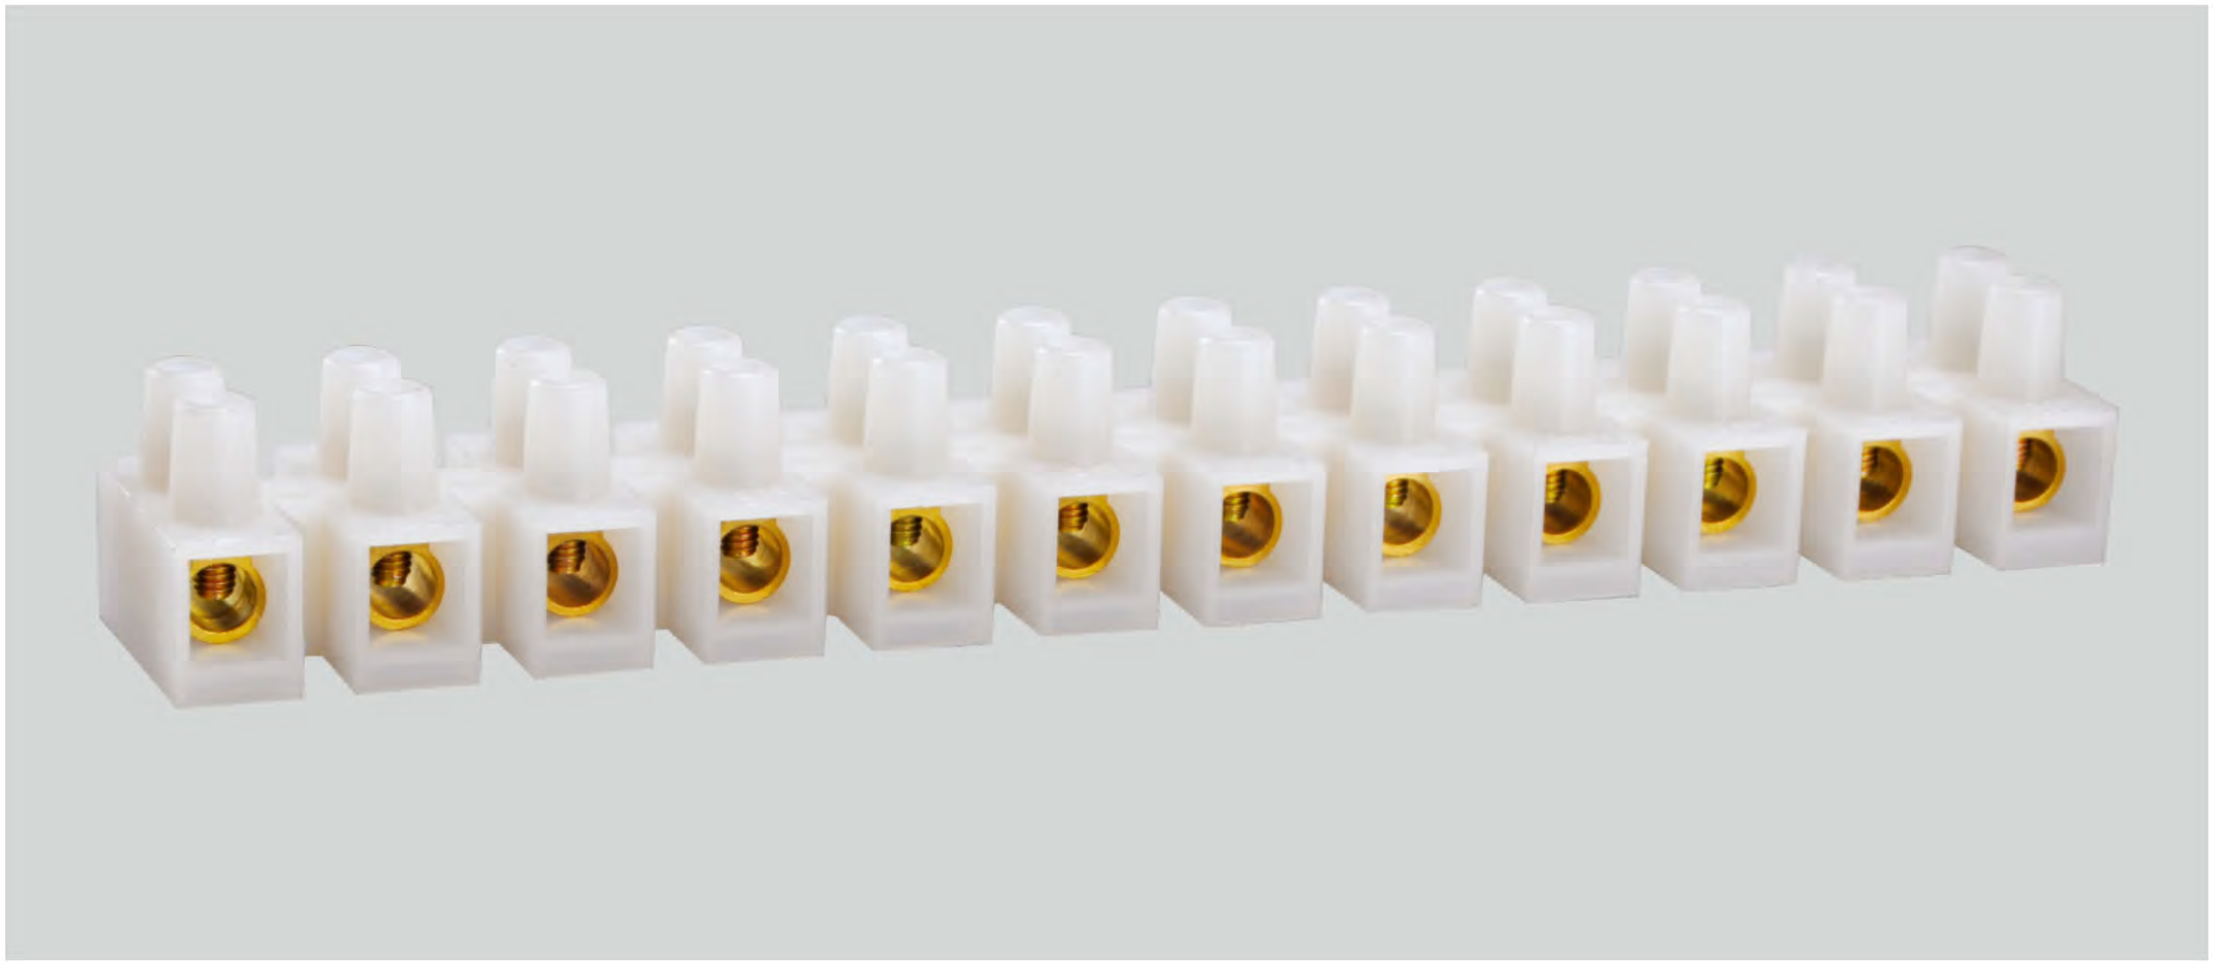

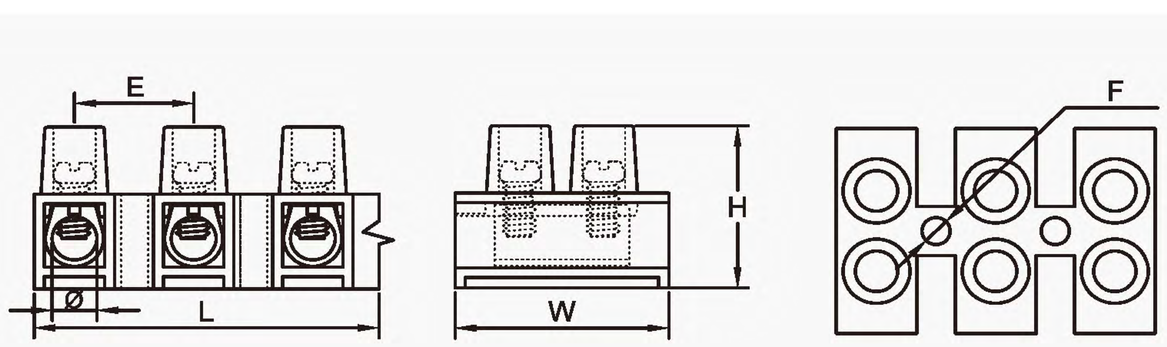

H Type Terminal Blocks <PA6>
Glow Wire Test: 850℃
Color: ○ ●


Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP001-30	2.5-4.0mm²	3A	400V	95.3	17.5	13.0	8.0	2.5	3.0	M2.5	1000
SP001-31	4.0-6.0mm²	6A	400V	117.4	19.0	15.5	10.0	2.6	3.3	M3.0	800
SP001-32	6.0-10.0mm²	10A	400V	132.6	21.2	16.6	11.0	2.9	4.2	M3.0	500
SP001-33	10-12mm²	15A	400V	142.0	23.2	19.0	11.8	3.2	4.5	M3.5	400
SP001-34	12-14mm²	20A	400V	141.5	23.4	20.4	12.2	3.2	4.5	M4.0	400
SP001-35	16mm²	30A	400V	169.0	26.1	20.5	14.2	3.4	5.5	M4.0	300
SP001-36	25mm²	60A	400V	192.0	30.0	26.0	16.2	3.4	6.5	M4.0	200
SP001-37	35mm²	80A	400V	233.5	37.0	29.8	20.0	3.8	8.0	M5.0	100
SP001-38	40mm²	100A	450V	262.0	46.0	35.7	22.5	4.1	9.0	M6.0	50

Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated



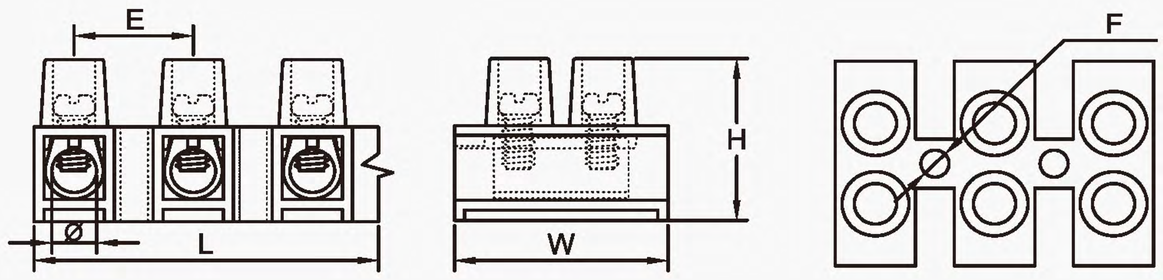

Saudi Arabia Economical Type <PE>


Working Temperature: –40℃ To 65℃

Color: ○ ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP001-40	10mm²	10A	380V	132.4	22.0	18.2	11.2	3.5	4.2	M3.5	1000
SP001-41	16mm²	30A	380V	163.5	23.9	19.7	14.0	3.7	4.6	M4.0	300
SP001-42	25mm²	60A	400V	190.5	30.7	25.3	16.4	4.0	6.3	M4.0	200
SP001-43	35mm²	100A	450V	228.0	38.2	33.9	19.3	4.9	7.7	M5.0	100

Feed Through Terminal Blocks
Conductor: Steel, Steel With Brass Spring
Screws: Steel, Zinc Plated



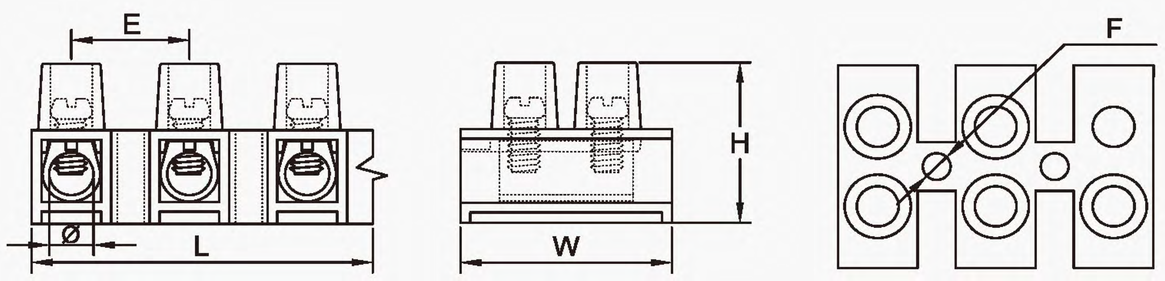

H Type Steel Terminal Blocks <PA6>
Glow Wire Test 850℃
Color: ○ ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP001-50	2.5 mm^2	24A	450V	95.5	17.0	14.2	8.2	2.8	3.1	M2.5	1000
SP001-51*	2.5 mm^2	24A	450V	95.5	17.0	14.2	8.2	2.8	3.1	M2.5	1000
SP001-52	4.0 mm^2	24A	450V	115.5	19.0	16.8	10.0	3.5	4.6	M3.0	1000

*Steel Insert With Brass Spring　铁芯内件带铜片

HS GROUP


Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated

CE DVE ☑ RoHS Compliant ☑ REACH Compliant



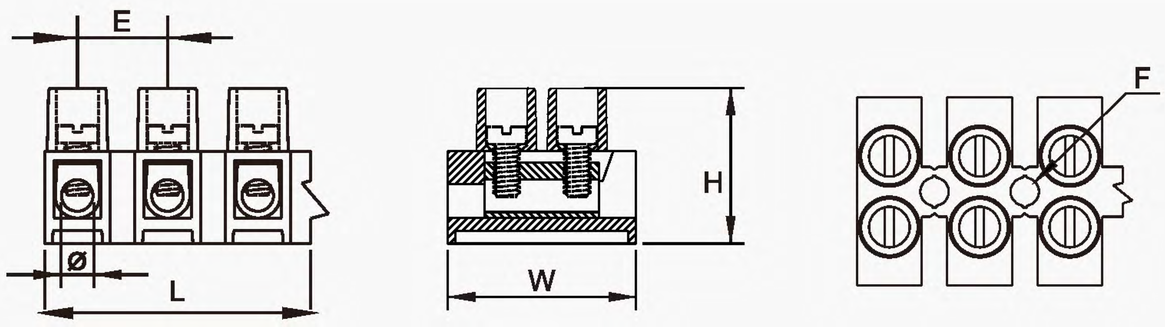

H Type Terminal Blocks <PA6>

Glow Wire Test: 850℃

Ambient Temperature: T110℃


Color: ○ ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SPV-01	0.75–1.5 mm^2	17.5A	450V	97.4	17.3	14.4	8.3	2.5	3.0	M2.5	1000
SPV-02	1.0–2.5 mm^2	24A	450V	118.6	20.3	16.8	10.2	3.2	3.3	M3.0	1000
SPV-03	2.5–6.0 mm^2	41A	500V	142.8	24.6	19.0	12.3	3.9	4.2	M3.5	500
SPV-04	4.0–10 mm^2	57A	500V	160.4	26.0	22.3	13.8	4.2	5.0	M4.0	300
SPV-05	6.0–16 mm^2	76A	500V	172.5	28.6	26.2	14.8	4.2	6.6	M4.0	200

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated

CE NF ☑RoHS Compliant ☑REACH Compliant



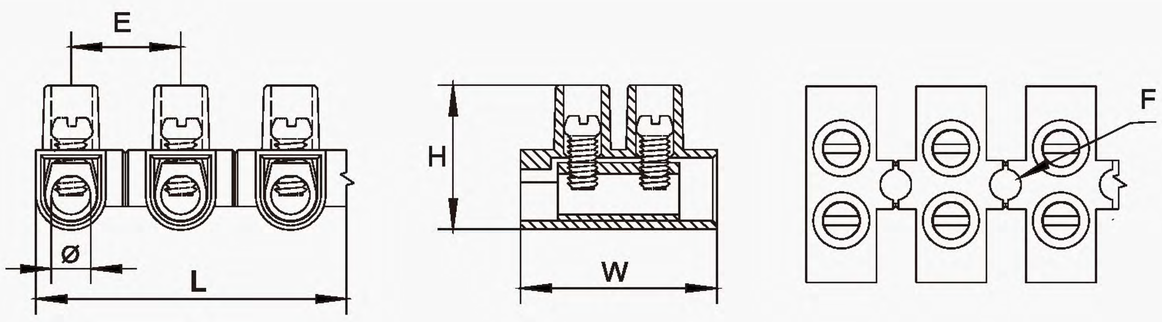


U Type Terminal Blocks <PP>
Glow Wire Test: 850℃
Ambient Temperature: T85℃
Color: ○ ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SPN-01	4.0mm²	32A	400V	92.6	15.9	11.3	7.9	2.5	3.0	M2.5	1000
SPN-02	6.0mm²	41A	400V	114.2	15.7	13.0	9.8	3.0	3.4	M3.0	1000
SPN-03	10mm²	57A	400V	131.1	21.0	15.5	11.3	3.0	4.3	M3.0	500
SPN-04	16mm²	76A	400V	168.1	25.8	19.4	14.5	4.1	5.4	M4.0	300
SPN-05	25mm²	101A	400V	190.9	29.8	23.7	16.3	4.2	6.7	M4.0	200

HS GROUP

Wire Protection Terminal Blocks
Conductor: Brass (Nickled) With Stainless Spring
Screws: Steel, Zinc Plated



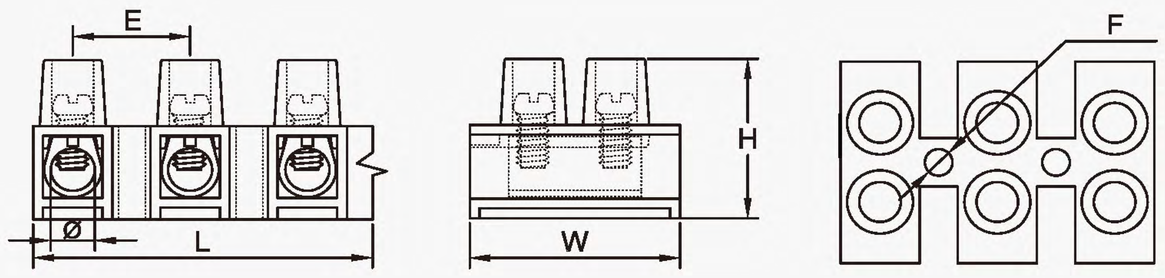


Wire Protection Terminal Blocks <PP>
Glow Wire Test: 850℃
Color: ○

Item No.	Wire Range	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
			mm							
SP002-01	2.5mm²	450V	94.1	17.9	12.5	7.8	2.6	2.8	M2.5	1000
SP002-02	4.0mm²	450V	117.2	20.1	14.2	9.8	3.5	3.5	M3.0	1000
SP002-03	6.0mm²	450V	140.7	23.1	16.8	12.0	4.0	4.2	M3.5	500
SP002-04	16mm²	600V	170.5	27.1	21.5	14.5	4.5	6.0	M4.0	300
SP002-05	25mm²	600V	201.0	36.3	27.0	16.9	4.5	7.6	M5.0	200

● Also Available In PA<V0>

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated



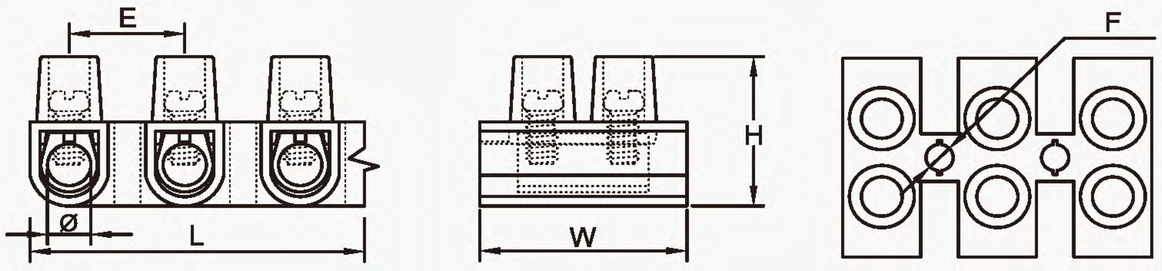

U Type Terminal Blocks <PE>
Working Temperature:–40℃ to 65℃
Color: ○ ●


Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP003-01	2.5-4.0mm²	3A	380V	91.4	15.6	10.8	7.5	2.5	3.0	M2.5	1000
SP003-02	4.0-6.0mm²	6A	380V	112.5	15.5	12.8	9.5	2.9	3.3	M3.0	800
SP003-03	6.0-10.0mm²	10A	380V	128.0	20.6	15.0	10.8	2.9	4.2	M3.0	500
SP003-04	10-12mm²	15A	380V	137.3	22.5	16.6	11.5	3.1	4.5	M3.5	400
SP003-05	12-14mm²	20A	380V	137.5	22.7	17.7	12.0	3.5	4.5	M4.0	400
SP003-06	16mm²	30A	380V	164.5	25.3	19.0	14.2	3.5	5.5	M4.0	300
SP003-07	25mm²	60A	400V	185.5	29.2	24.0	15.8	3.5	6.5	M5.0	200
SP003-08	35mm²	80A	400V	204.5	32.6	27.2	17.3	4.5	7.0	M5.0	100
SP003-09	40mm²	100A	450V	250.0	45.6	30.6	21.5	4.7	9.0	M6.0	50

Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated



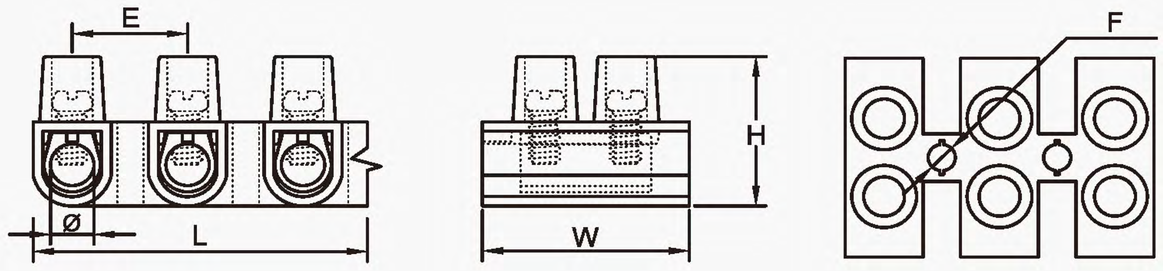

U Type Terminal Blocks <PP>


Glow Wire Test:850℃

Color: ○ ● ● ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP003-20	2.5-4.0mm²	3A	380V	92.5	15.6	10.7	7.5	2.5	3.0	M2.5	1000
SP003-21	4.0-6.0mm²	6A	380V	114.3	15.7	12.8	9.6	2.9	3.3	M3.0	800
SP003-22	6.0-10.0mm²	10A	380V	131.0	20.9	15.0	11.0	3.2	4.2	M3.0	500
SP003-23	10-12mm²	15A	380V	138.8	22.8	16.8	11.8	3.2	4.5	M3.5	400
SP003-24	12-14mm²	20A	380V	141.2	22.4	18.0	11.9	3.2	4.5	M4.0	400
SP003-25	16mm²	30A	380V	167.0	25.7	18.8	13.9	3.6	5.5	M4.0	300
SP003-26	25mm²	60A	380V	190.0	29.5	24.1	16.0	3.7	6.5	M5.0	200
SP003-27	35mm²	80A	400V	208.0	32.9	27.3	17.5	4.6	7.0	M5.0	100
SP003-28	40mm²	100A	450V	254.0	46.0	30.8	21.5	4.7	9.0	M6.0	50

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated



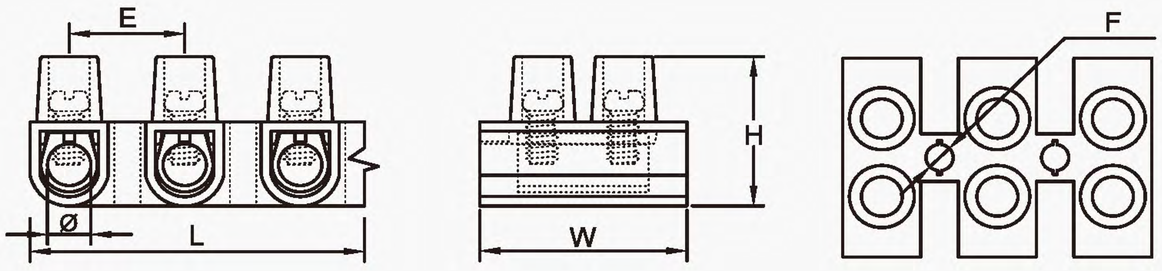

U Type Terminal Blocks <PA6>
Glow Wire Test:850℃
Color: ○ ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP003-30	2.5-4.0mm²	3A	380V	93.2	15.8	11.0	7.5	2.5	3.0	M2.5	1000
SP003-31	4.0-6.0mm²	6A	380V	114.8	15.8	13.0	9.7	2.9	3.3	M3.0	800
SP003-32	6.0-10.0mm²	10A	380V	131.8	21.1	15.3	11.1	2.9	4.2	M3.0	500
SP003-33	10-12mm²	15A	380V	141.5	23.0	17.0	11.8	3.1	4.5	M3.5	400
SP003-34	12-14mm²	20A	380V	141.5	22.4	18.0	11.9	3.2	4.5	M4.0	400
SP003-35	16mm²	30A	380V	169.0	26.0	19.2	14.5	3.5	5.5	M4.0	300
SP003-36	25mm²	60A	380V	191.0	30.0	24.4	16.0	3.5	6.5	M5.0	200
SP003-37	35mm²	80A	400V	211.0	33.0	28.0	17.8	4.5	7.0	M5.0	100
SP003-38	40mm²	100A	450V	260.0	47.0	31.5	22.0	4.7	9.0	M6.0	50

HS GROUP


Feed Through Terminal Blocks

Conductor: Steel， Zinc or Brass Plated

Screws: Steel, Zinc Plated

CE



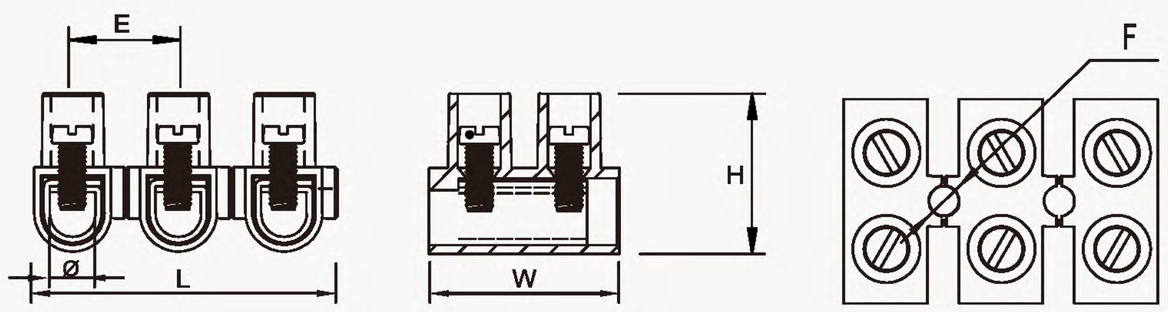

U Type Terminal Blocks <PP>

Glow Wire Test:850℃


Color: ○ ●


Item No.	Wire Range	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
			mm							
SP003/S-01	1.5mm²	400V	95.3	16.9	11.7	8.2	2.2	2.9	M2.5	1000
SP003/S-02	4.0mm²	400V	109.6	17.9	13.5	9.1	2.5	3.1	M3.0	1000
SP003/S-03	6.0mm²	400V	128.6	20.7	15.8	11	2.9	4	M3.0	500
SP003/S-04	10.0mm²	400V	164	24.6	19.9	14	3.7	5.1	M4.0	300
SP003/S-05	16mm²	400V	187.6	28.3	24	16	4.2	6.5	M4.0	200

Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated

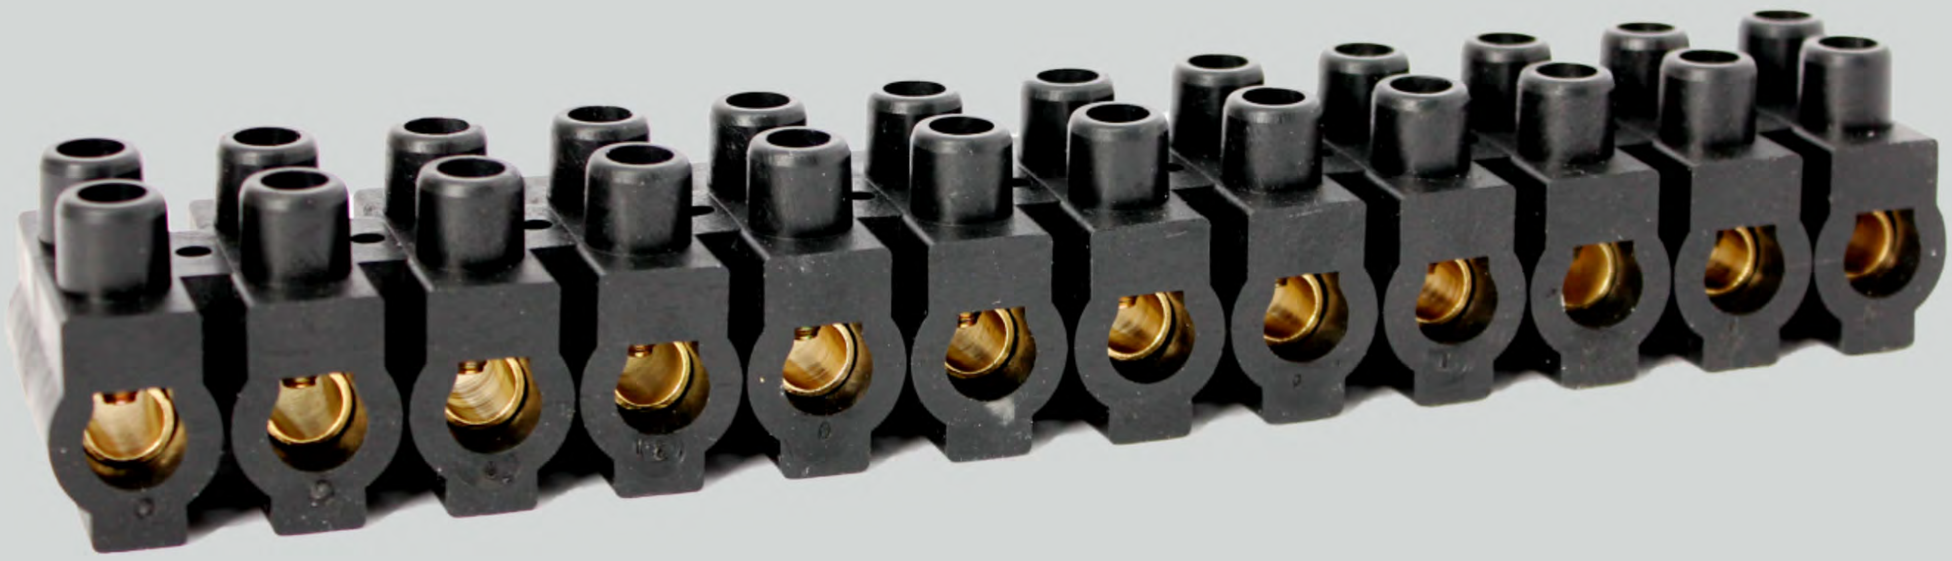

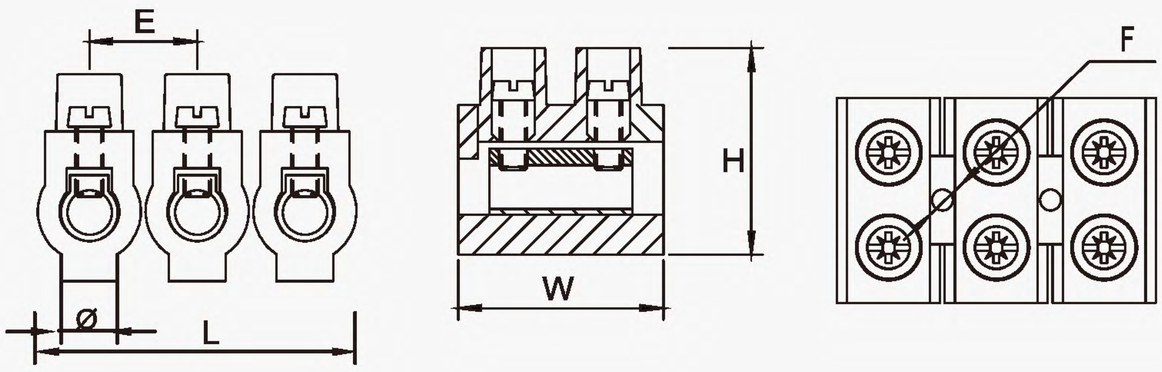

U Type PVC Terminal Blocks


Working Temperature:–40℃ To 65℃

Color: ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP003-50	16mm^2	30A	500V	164.8	25.7	20.2	11.2	3.2	5.7	M4	100
SP003-51	35mm^2	80A	500V	226.3	36	36.2	16.7	3.7	8.0	M5	50

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated



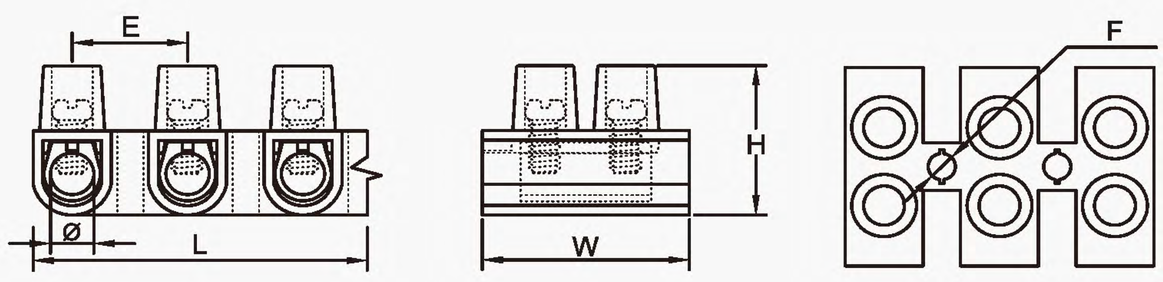


U Type Extra Small Terminal Blocks <PE>
Working Temperature:–40℃ To 65℃
Color: ○ ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP004-01	2.5-4.0mm²	3A	380V	93.5	13.0	10.8	8.0	2.5	3.0	M2.5	1000
SP004-02	4.0-6.0mm²	6A	380V	115.5	14.1	13.5	9.7	2.9	3.3	M3.0	1000
SP004-03	6.0-10.0mm²	10A	380V	128.5	18.0	14.7	11.0	2.9	4.2	M3.0	500
SP004-04	10-12mm²	15A	380V	136.5	19.3	17.0	11.6	3.1	4.5	M3.5	500
SP004-05	16mm²	30A	380V	164.5	21.8	18.3	14.0	3.5	5.0	M4.0	200
SP004-06	25mm²	60A	380V	185.5	25.7	22.4	15.8	3.5	6.6	M4.0	200
SP004-07	40mm²	100A	380V	230.0	36.2	28.0	19.1	4.5	9.0	M5.0	100

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated



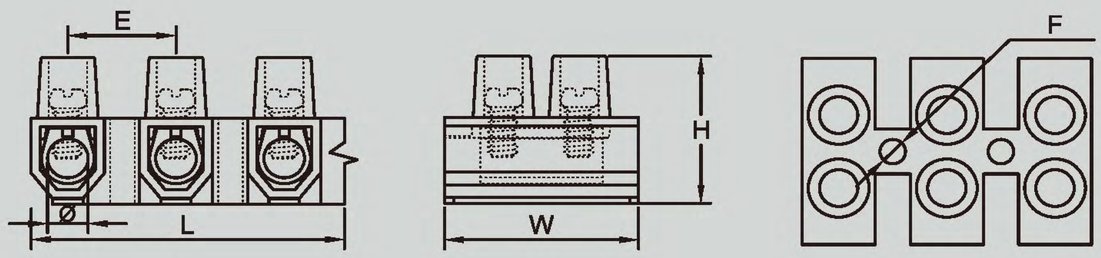

V Type Terminal Blocks <PE>
Color: ○ ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP005-01	2.5mm²	3A	250V	93.2	17.0	13.6	8.0	2.5	3.0	M2.5	1000
SP005-02	4.0mm²	6A	250V	114.5	18.8	15.3	10.0	2.9	3.3	M3.0	1000
SP005-03	6.0mm²	10A	250V	128.8	20.9	16.0	11.0	2.9	4.2	M3.0	500
SP005-04	10mm²	15A	250V	136.8	22.6	18.8	12.0	3.1	4.5	M4.0	500
SP005-05	16mm²	30A	250V	164.5	25.5	20.2	15.0	3.5	5.0	M4.0	300
SP005-06	25mm²	60A	250V	193.0	30.0	26.0	16.3	3.5	6.5	M4.0	200
SP005-07	35mm²	80A	400V	202.0	35.7	30.0	17.3	3.5	8.0	M5.0	100

● Also available In PA6 or PP



PA6



PP


Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated





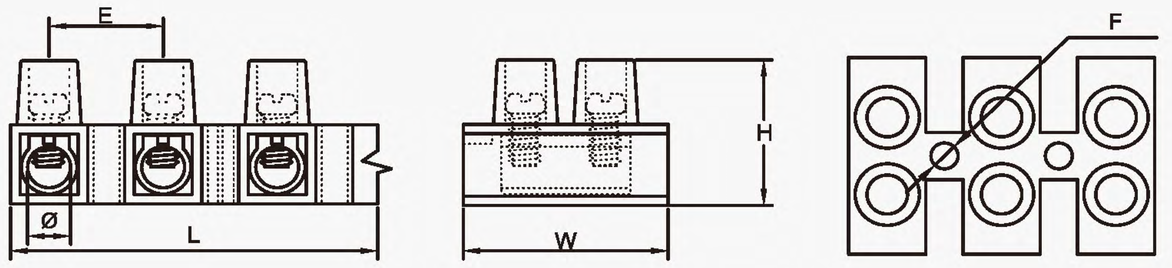

Flexible Terminal Blocks <PA6>

Glow Wire Test:850℃

Color: ○ ●


Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP006-01	2.5mm²	3A	450V	94.0	17.0	7.0	8.0	3.0	3.0	M2.5	1000
SP006-02	4.0mm²	6A	450V	117.5	20.0	15.0	10.0	3.0	3.2	M3.0	1000
SP006-03	6.0mm²	10A	450V	140.0	23.0	17.0	12.0	4.0	4.2	M3.5	500
SP006-04	16mm²	30A	450V	175.7	26.0	22.0	15.0	4.0	5.5	M4.0	500

Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated



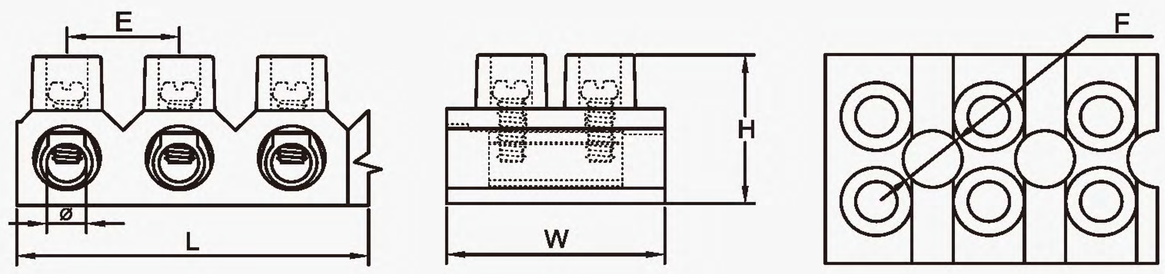

Bakelite Terminal Blocks

Working Temperature: –35℃ To 125℃

Color: ●

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP007-01	4.0mm²	5A	500V	115.0	16.5	14.0	9.2	3.5	3.3	M3.0	500
SP007-02	6.0mm²	10A	500V	126.0	20.5	16.3	10.5	3.5	4.2	M3.0	400
SP007-03	12mm²	15A	500V	137.0	24.7	17.5	11.2	3.5	4.3	M3.5	300
SP007-04	16mm²	30A	500V	178.0	29.5	23.4	15.0	4.2	5.5	M4.0	200
SP007-05	12mm²/3P	15A	500V	34.25	24.7	17.5	11.2	3.5	4.3	M3.5	300


HS GROUP

Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated



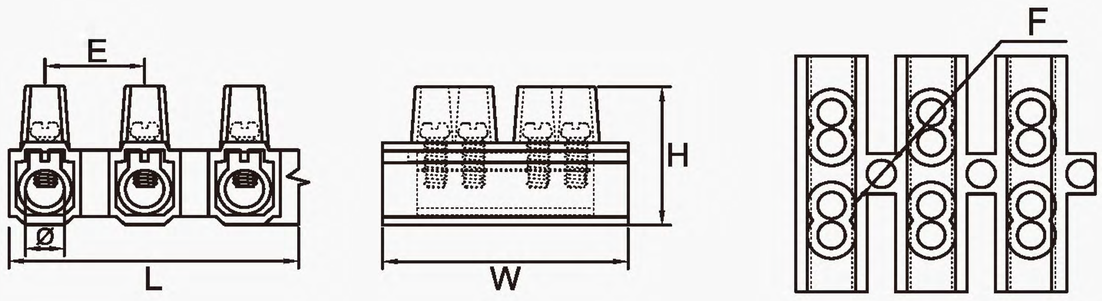

Double Line Terminal Blocks <PE>

Working Temperature: –40℃ To 65℃

Color: ●


Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP008-01	10mm²	10A	500V	130.5	21.2	16.6	11.0	3.2	4.4	M3.5	400
SP008-02	16mm²	30A	500V	167.0	27.0	21.0	14.0	3.6	5.7	M4.0	300
SP008-03	25mm²	60A	500V	165.0	42.0	24.6	17.0	4.7	6.5	M4.0	180


● Also Available In PP & PC

Feed Through Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated

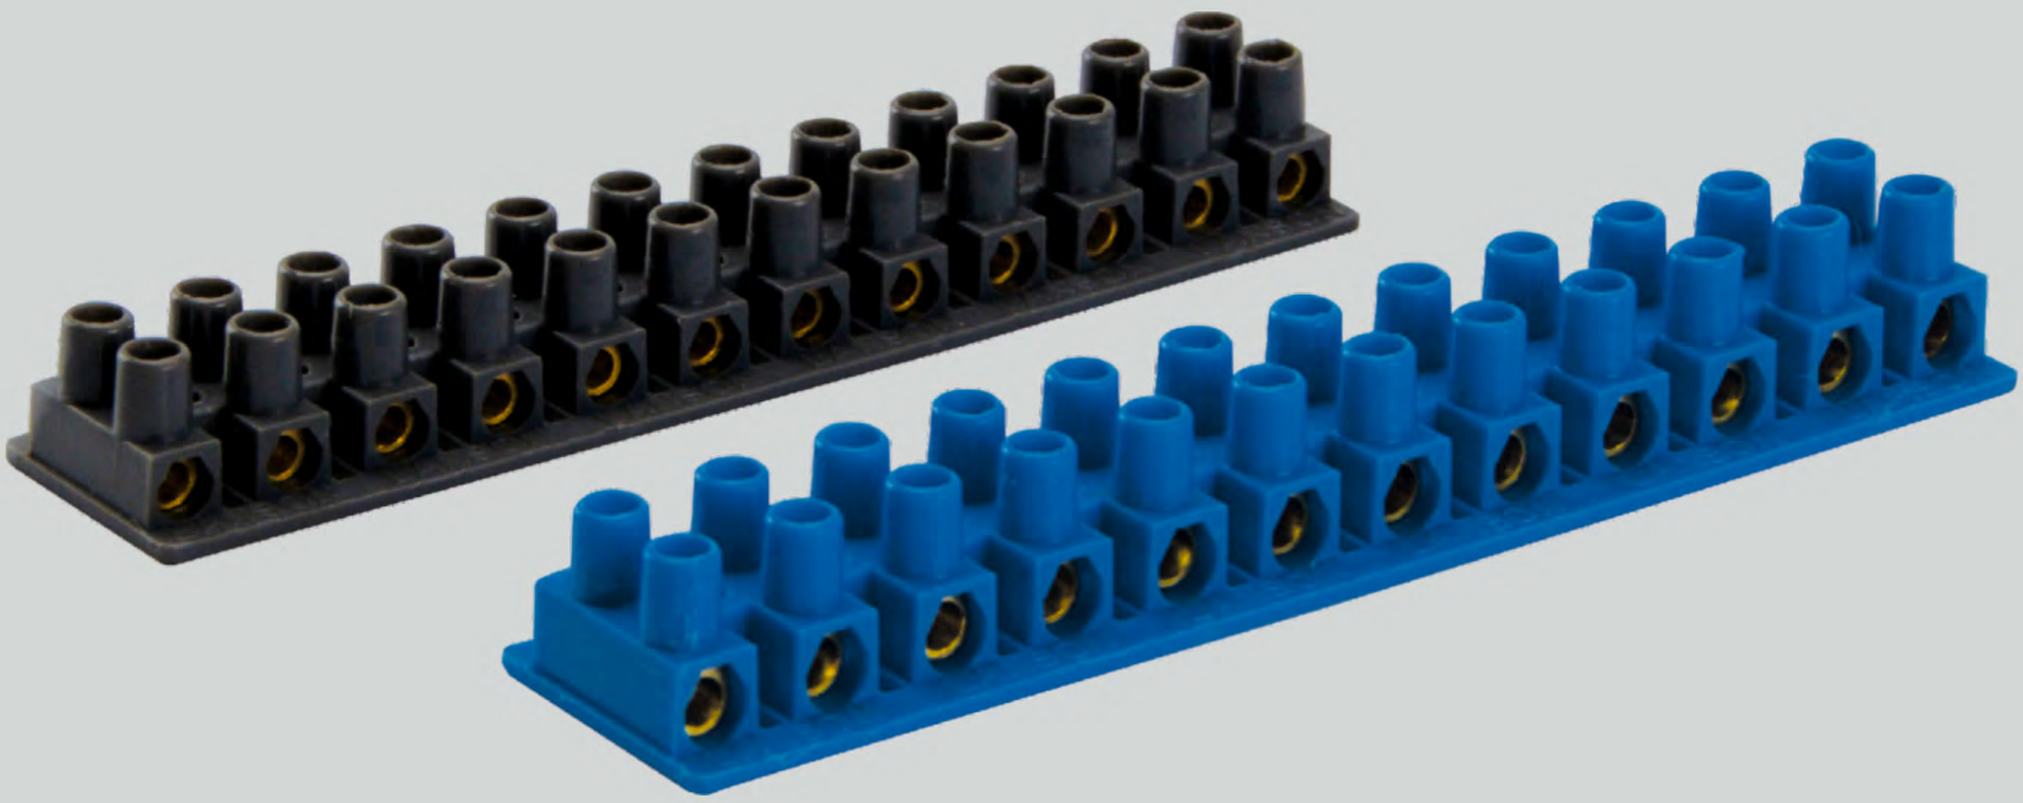

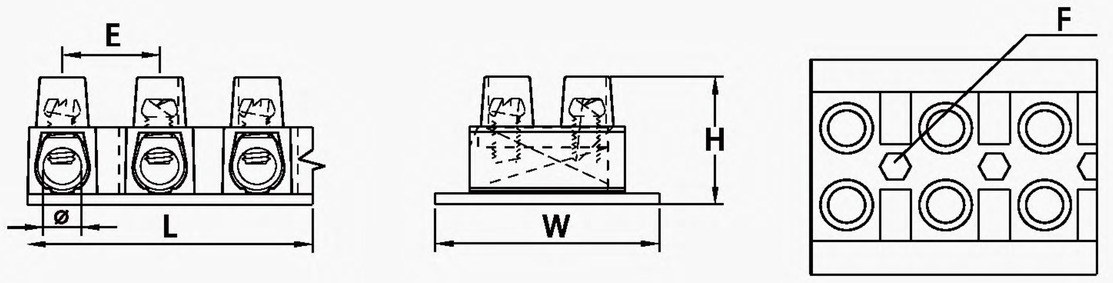

T SideTerminal Blocks <PA66>

Glow Wire Test:850℃


Color:

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP009-01	4mm^2	15A	500V	117. 0	24.5	14.5	9.8	2.8	3.3	M3.0	500
SP009-02	6mm^2	20A	500V	128. 5	26.5	16.0	11.0	3.1	4.2	M3.0	500
SP009-03	10mm^2	30A	500V	157. 0	31.4	18.7	13.5	3.3	5.5	M4.0	300

HS GROUP

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated



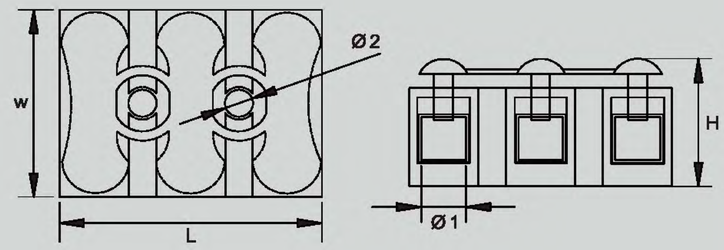


Push Open–Close Fast Connector <PP>
Glow Wire Test : 850˚C
Color: ○ ●

Item No.	Wire Range	Amp	Volt	Pole	L	W	H	Ø1	Ø2	PCS/CTN
					mm					
SP017-01	⩽1.5mm²	6A	250V	2 Poles	17.0	20.0	14.0	5.5	2.9	3000
SP017-02	⩽1.5mm²	6A	250V	3 Poles	27.0	20.0	14.0	5.5	2.8	2000

● Also Available In PA66



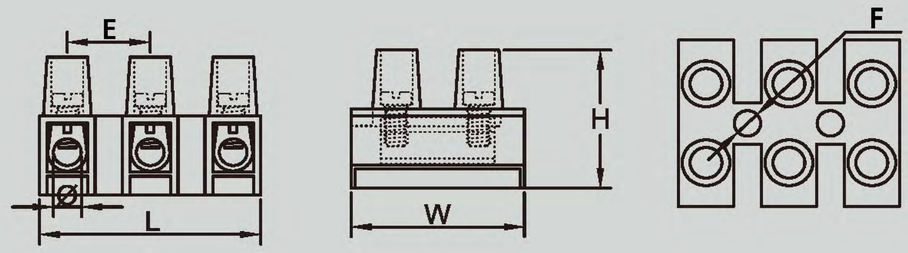


2 & 3 Poles Terminal Blocks <PA6>
Glow Wire Test : 850˚C
Color: ○

Item No.	Wire Range	Volt / Pole	L	W	H	E	F	Ø	Screw Size	PCS/CTN
			mm							
SP018-01	6.0mm²	380/2P	17.0	21.0	17.7	10.3	3.3	3.6	M3.0	3000
SP018-02	6.0mm²	380/3P	27.0	21.0	17.7	10.3	3.3	3.6	M3.0	2000


● Nickle Plated Brass Conductor

Feed Through Terminal Blocks
Conductor: Brass
Screws: Steel, Zinc Plated

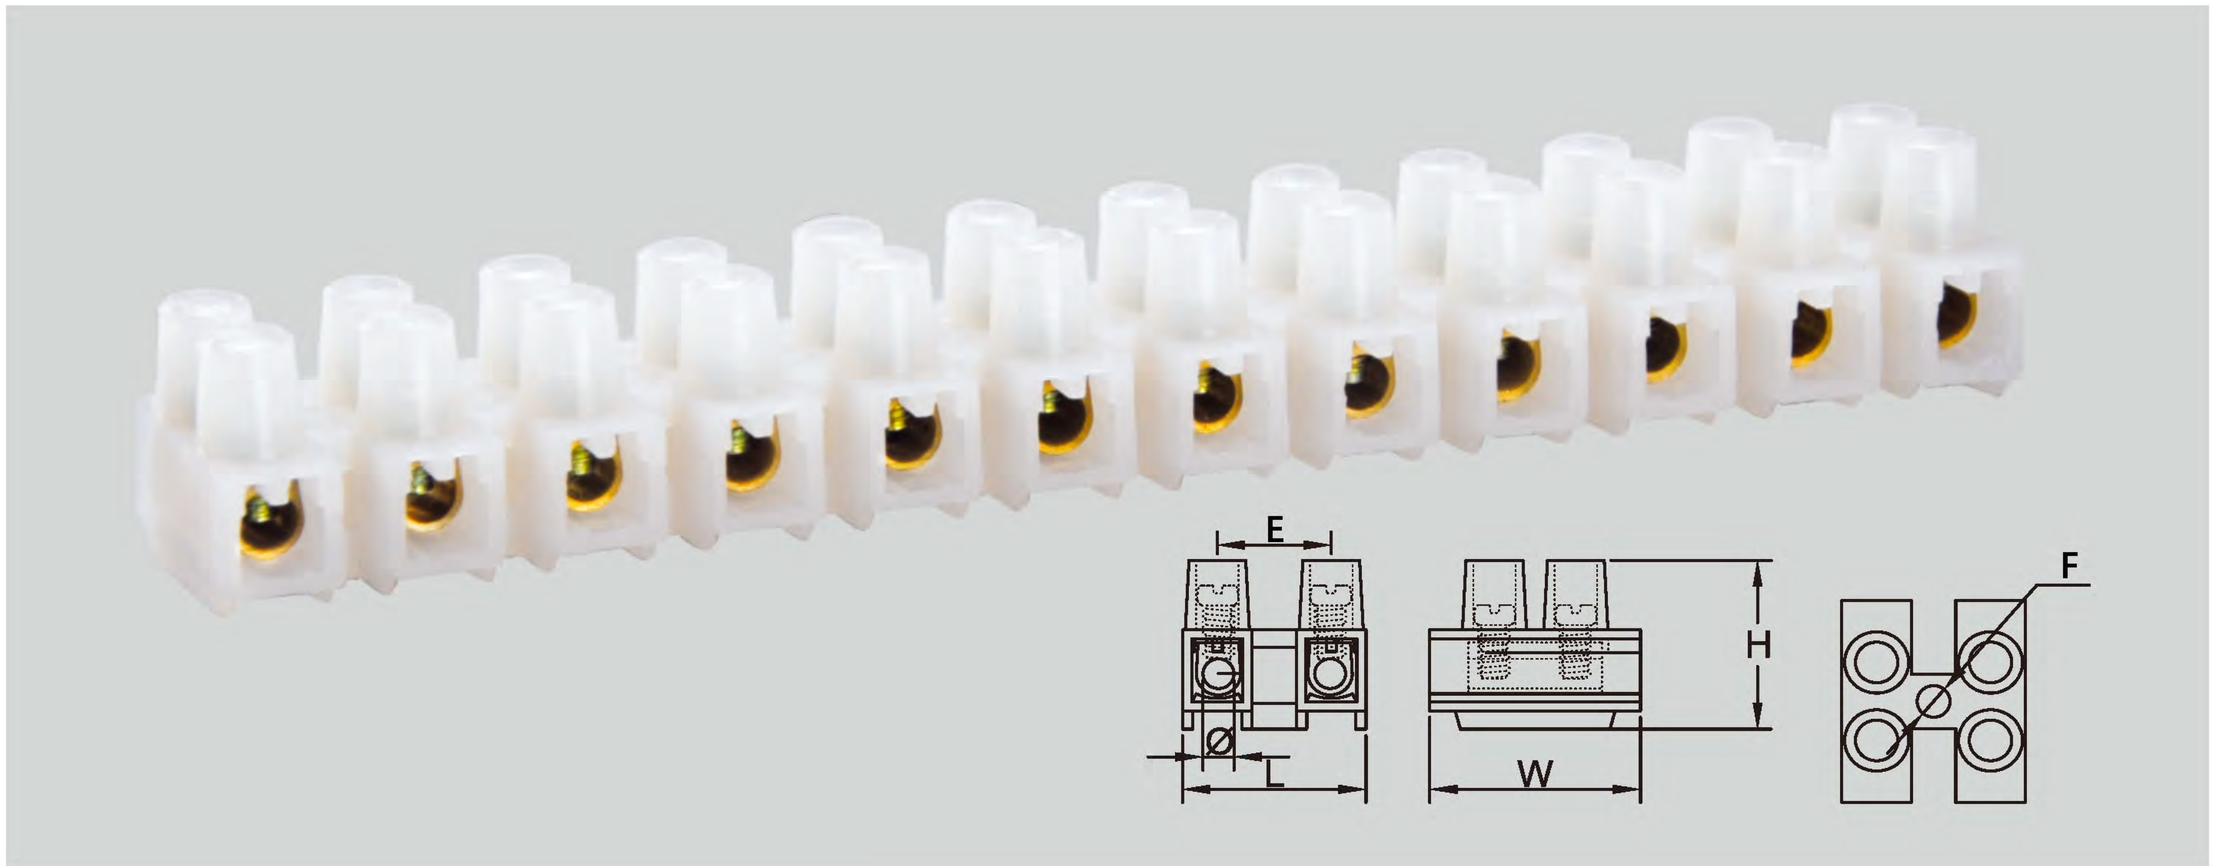

High Base Terminal Blocks<PA6>
Glow Wire Test : 850˚C
Color: ○

Item No.	Wire Range	Volt / Pole	L	W	H	E	F	Ø	Screw Size	PCS/CTN
			mm							
SP019-01	6.0mm²	380V/2P	17.0	21.0	16.0	10.2	3.0	3.3	M3.0	3000
SP019-02	6.0mm²	380V/12P	117.3	19.0	16.6	9.8	3.0	3.3	M3.0	1000

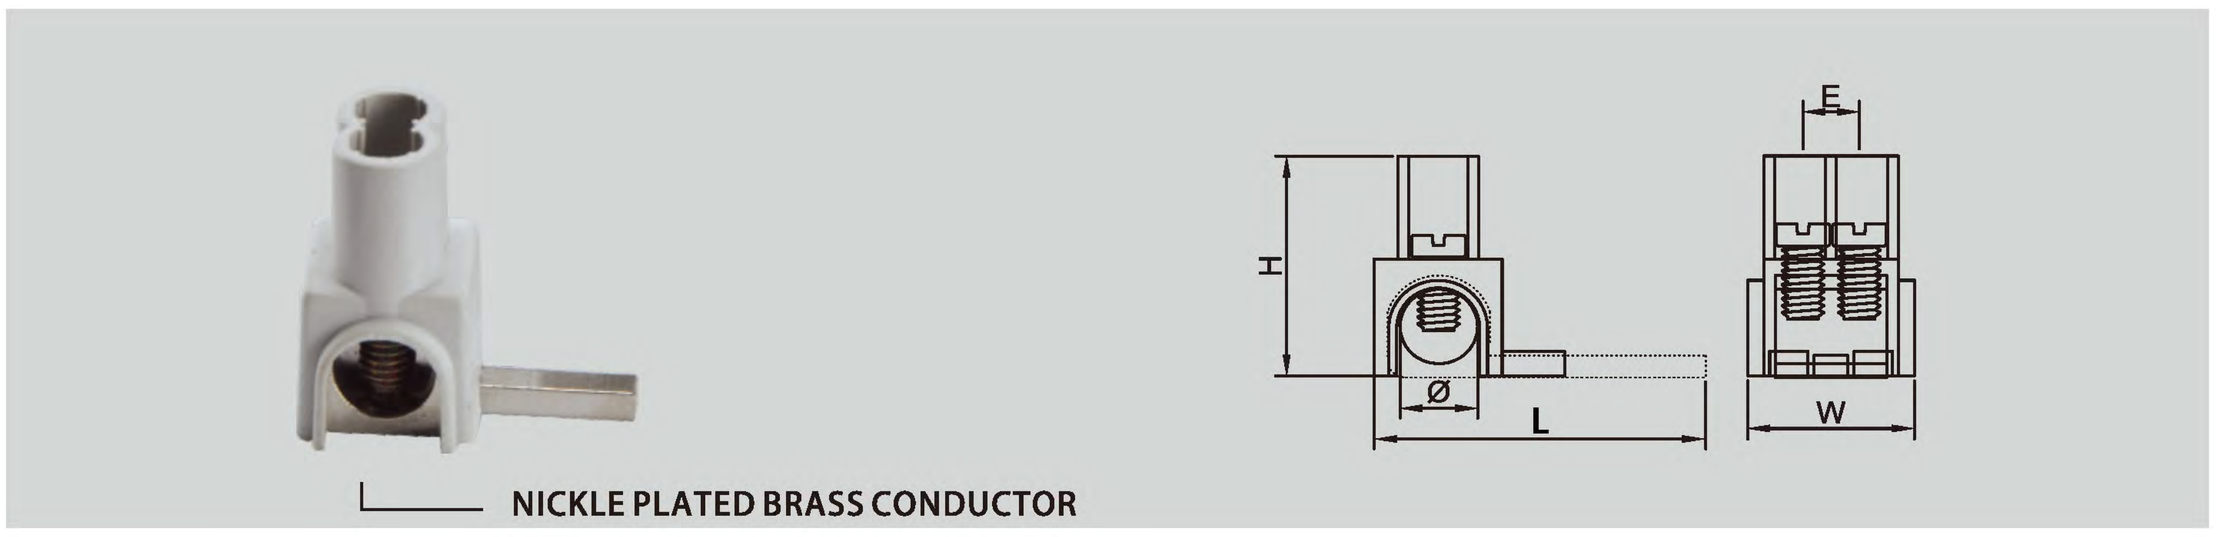


French Type Connector <PA66>
Glow Wire Test : 850˚C
Color: ●


Item No.	Wire Range	Volt	Size	L	W	H	E	Ø	Screw Size	PCS/CTN
				mm						
SP020-01	6mm²	380V	Long	37.1	18.6	25.7	6.5	8.5	M5.0	1250
SP020-02	6mm²	380V	Short	28.2	18.6	25.7	6.5	8.5	M5.0	1250


Ballast Terminal Blocks

Conductor: Steel

Screws: Steel, Zinc Plated

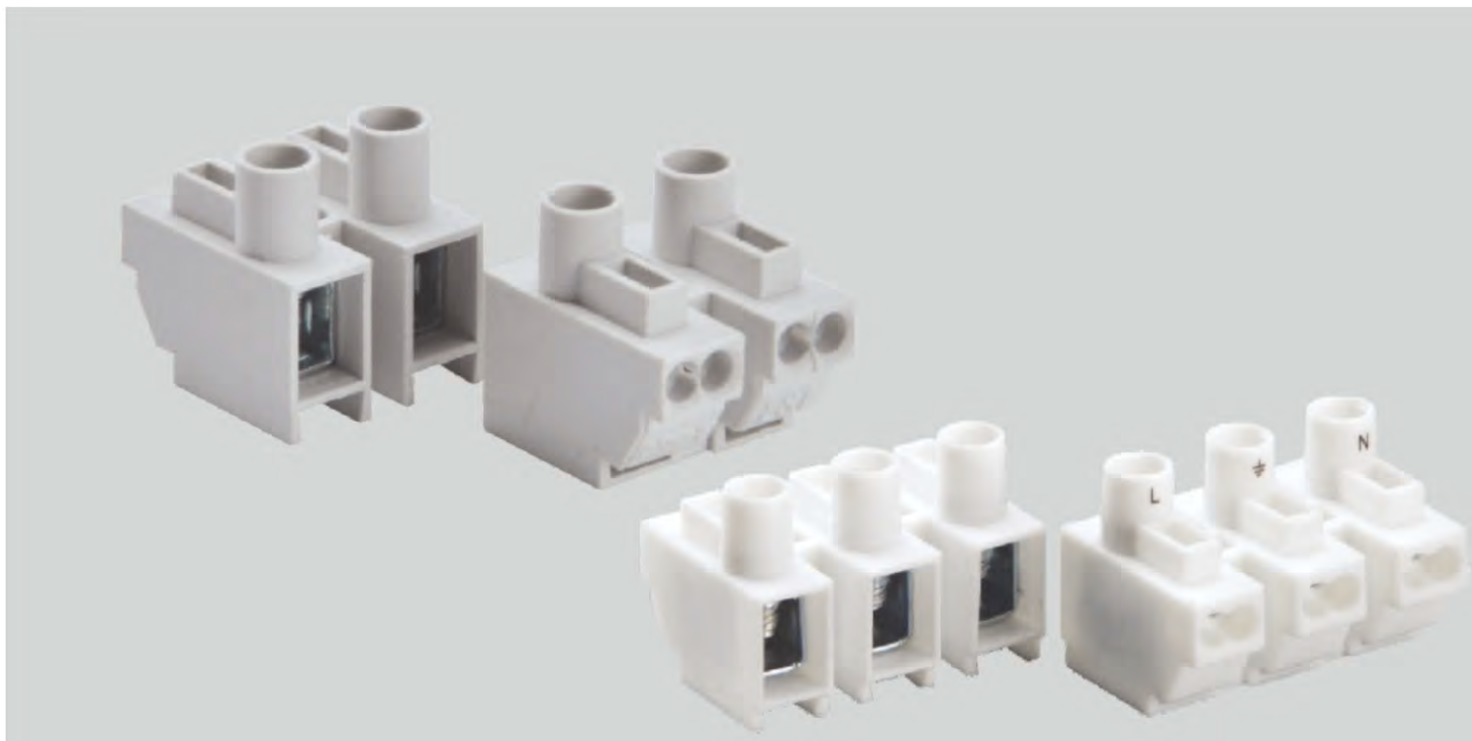

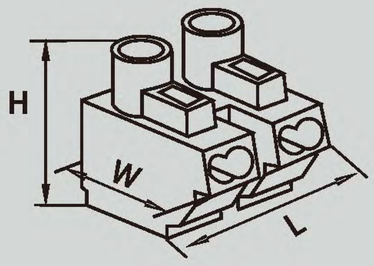





2&3 Poles Steel Ballast Connector <PA66>

Glow Wire Test : 850˚C

Color: ○ ●

Item No.	Wire Range	Volt	L	W	H	E	Ø	Screw Size	PCS/CTN
			mm						
SP021-01	6.0mm²	380V	17.3	19.3	19.0	10.0	4.5	M3.5	3000
SP021-02	6.0mm²	380V	27.2	19.3	19.0	10.0	4.5	M3.5	2000
SP021-02	6.0mm²	380V	27.2	19.3	19.0	10.0	4.5	M3.0	2000

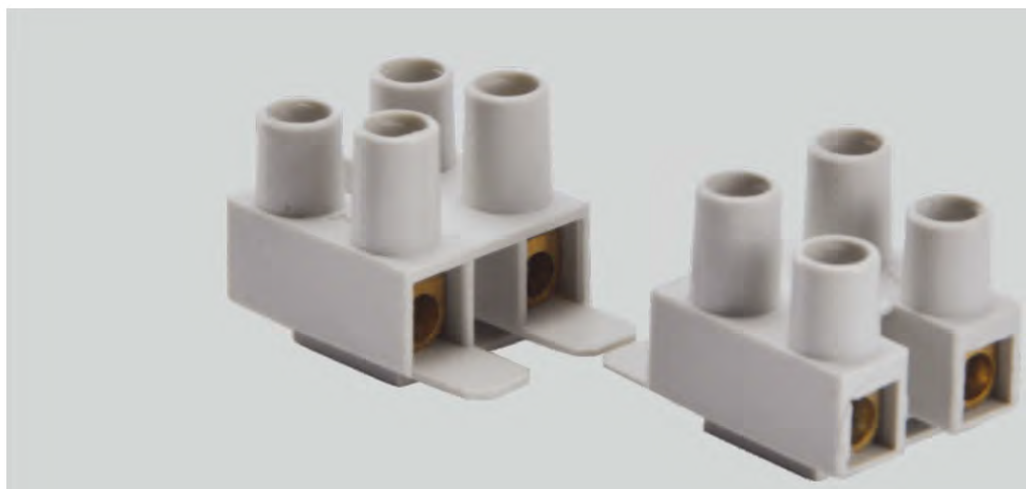

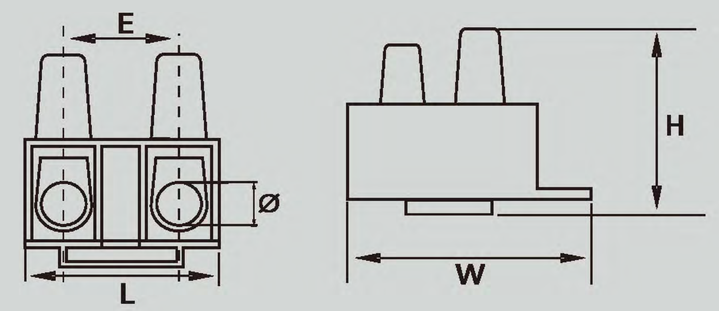

2 Poles Brass Ballast Connector <PA66>


Glow Wire Test : 850˚C


Color: ○

Item No.	Wire Range	Volt	L	W	H	E	Ø	Screw Size	PCS/CTN
			mm						
SP022-01	2.5mm²	380V	16.7	23.4	18.0	10.0	3.0	M3.0	2000

High Temperature Environment Connector
Conductor: Brass or Nickel–plated brass
Screws: Steel, Zinc Plated



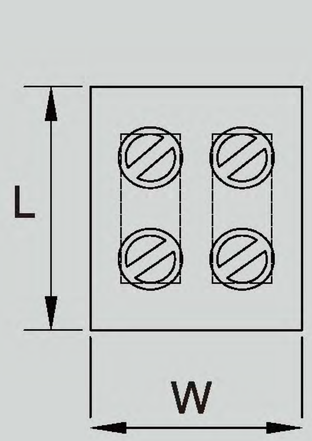


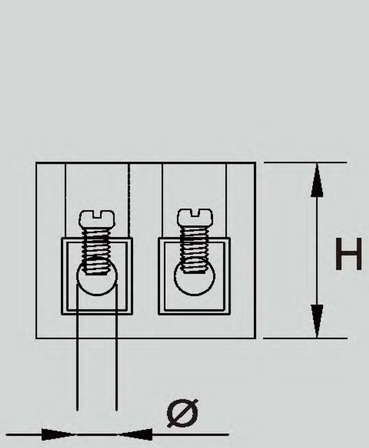


Steatite Ceramic Connector
Working Temperature: –40℃ To 425℃
Color: ○

Item No.	Wire Range	Amp	Volt	L	W	H	Ø	Screw Size	PCS/CTN
				mm					
SP023-01/2P	1.5-6 mm^2	24A	450V	21	18	15	4.2	M3.0	2000
SP023-02/3P	1.5-6 mm^2	24A	450V	33	18	15	4.2	M3.0	2000
SP023-03/2P	2.5-10 mm^2	32A	450V	24	22	21	4.5	M3.5	2000
SP023-04/3P	2.5-10 mm^2	32A	450V	38	22	21	4.5	M3.5	2000
SP023-05/2P	2.5-16 mm^2	57A	450V	34	30	23	6.3	M4.0	2000
SP023-06/3P	2.5-16 mm^2	57A	450V	53	30	23	6.3	M4.0	2000



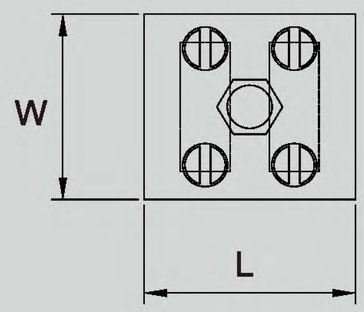

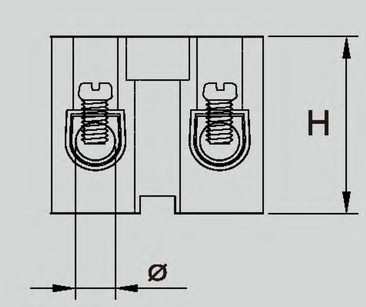

2 Poles Connector <PPS>
Working Temperature: –40℃ To 300℃
Color: ●


Item No.	Wire Range	Amp	Volt	L	W	H	Ø	Screw Size	PCS/CTN
				mm					
SP024-01	2.5-4.0mm^2	3A	380V	18	15.5	13	3.0	M2.5	2000

HS GROUP


MALE&FEMALE TERMINAL BLOCKS

Plug-in Connector Strips
Conductor: Brass
Screws: Steel, Zinc Plated

Type 1

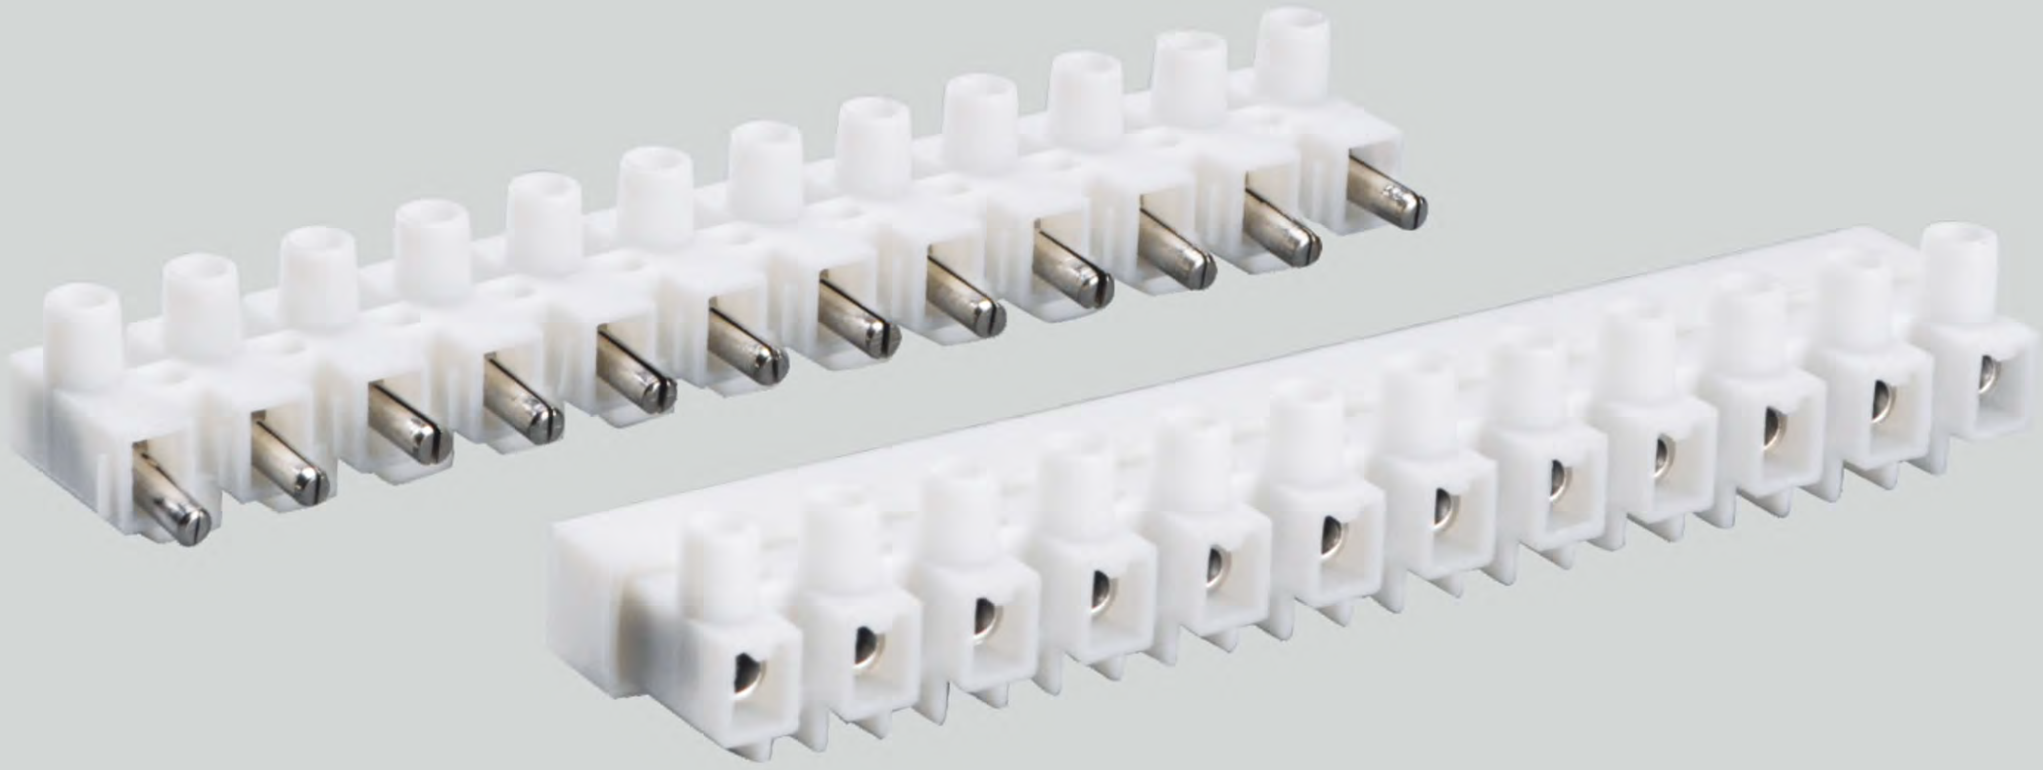



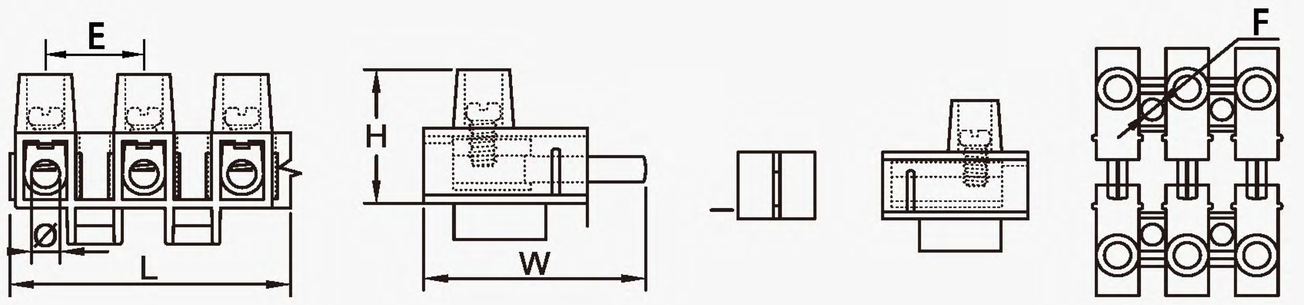


Plug-in Connector Strips (Type 1) <PA6>
Glow Wire Test: 850℃
Color: ○


Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP010-01	$10mm^2$	10A	380V	119.0	36.0	6.5	10.0	3.0	3.2	M3.0	300

Plug-in Connector Strips
Conductor: Brass
Screws: Steel, Zinc Plated

Type 2

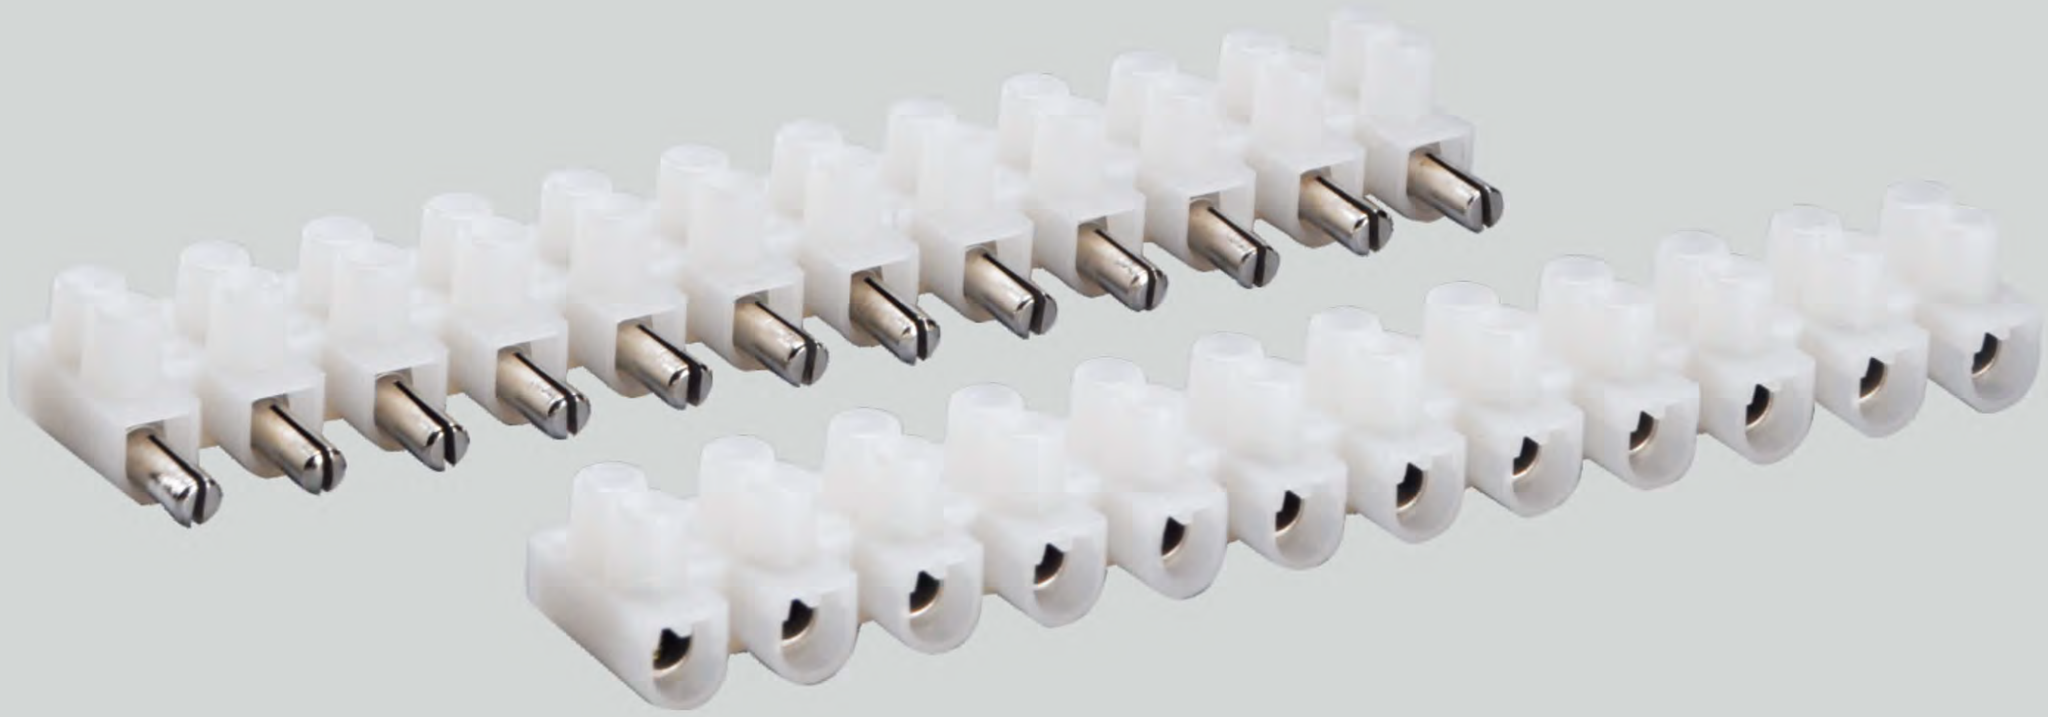



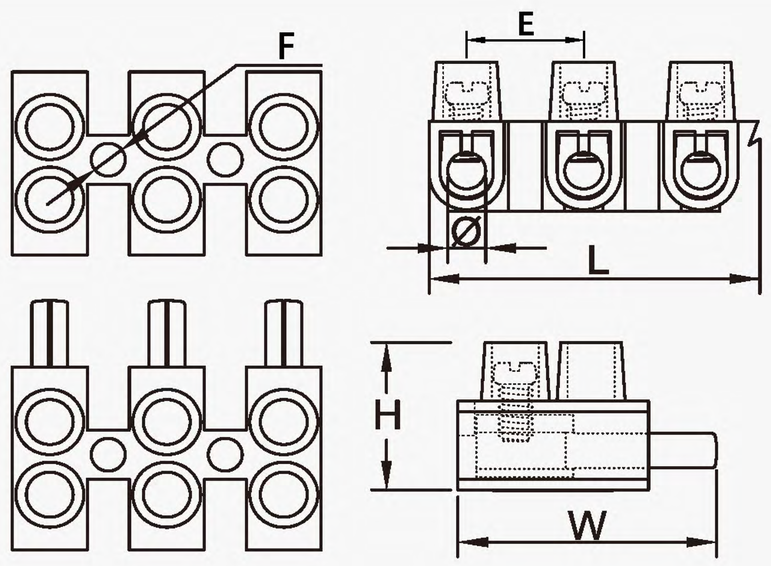

Plug-in Connector Strips (Type 2)<PA6>
Glow Wire Test: 850℃
Color: ○


Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP011-01	4.0mm²	3A	380V	93.5	32.0	11.0	8.0	2.5	2.8	M2.5	500
SP011-02	6.0mm²	6A	380V	115.0	32.0	13.0	10.0	3.0	3.2	M3.0	500
SP011-03	10mm²	10A	380V	132.0	36.8	15.0	11.0	2.9	4.2	M3.0	250
SP011-04	12mm²	16A	380V	140.5	40.0	17.0	12.0	3.0	4.4	M3.5	250


Plug-in Connector Strips
Conductor: Brass
Screws: Steel, Zinc Plated

Type 3





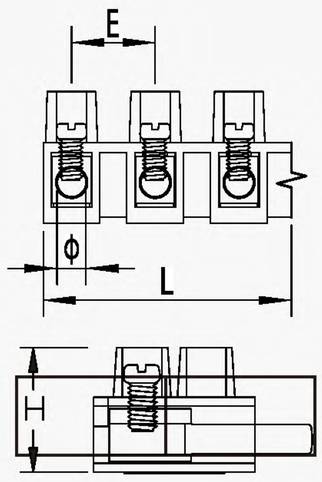

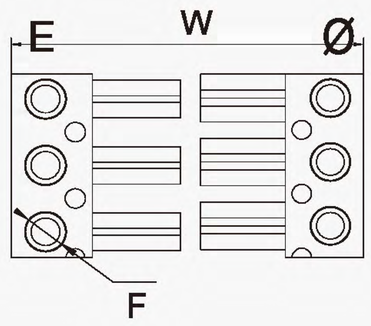

Plug-in Connector Strips (Type 3)<PA6>
Glow Wire Test: 850℃
Color: ○

Item No.	Wire Range	Amp	Volt	L	W	H	E	F	Ø	Screw Size	PCS/CTN
				mm							
SP011-10	2.5mm²-4.0mm²	10A	450V	120.5	37.3	16.7	10.3	3.0	3.3	M3.0	240

HS GROUP


ONE SIDE ENTRY SCREWS CONNECTOR

One – Side Entry Terminal Blocks

Conductor: Brass

Screws: Steel, Zinc Plated



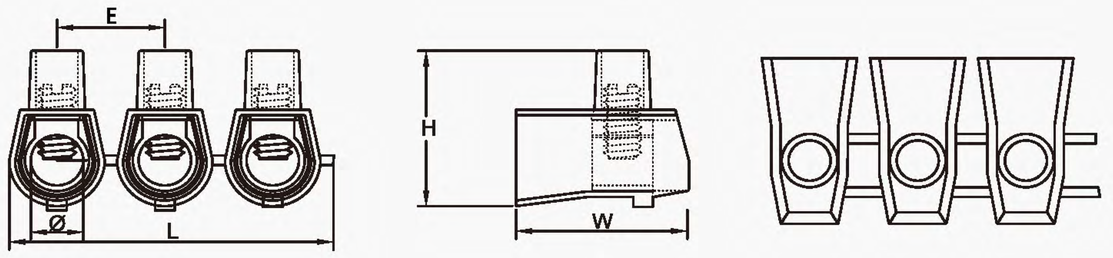

5×1 & 10×1

One – Side Entry Terminal Blocks <PC>

Working Temperature: –35℃ To 120℃

Color: Transparent

*Excellent Visibility

Item No.	Wire Range	Volt	Poles	L	W	H	E	Ø	Screw Size	PCS/CTN
				mm						
SP013-01	1.5mm²	500V	10	92	15.3	15.5	9.3	3.3	M3.0	1000
SP013-02	2.5mm²	500V	10	100	17.5	17.3	10.1	4.0	M3.5	1000
SP013-03	4.0mm²	500V	10	118	20	18.7	11.95	4.2	M3.5	500
SP013-04	6.0mm²	500V	10	137.9	22.8	22.8	14	6.2	M4.0	500
SP013-05	10mm²	500V	10	167	26.8	26.6	16.9	7.7	M5.0	500
SP013-06	16mm²	500V	10	221	30.9	33.5	22.3	10	M8.0	300
SP013-07	25mm²	500V	10	243	38.3	41.6	24.5	12	M10.0	100

- Pre–cutting service is available upon request.

HS GROUP


Single & Double Screws Connector

Conductor: Brass

Screws: Steel, Zinc Plated


SP014



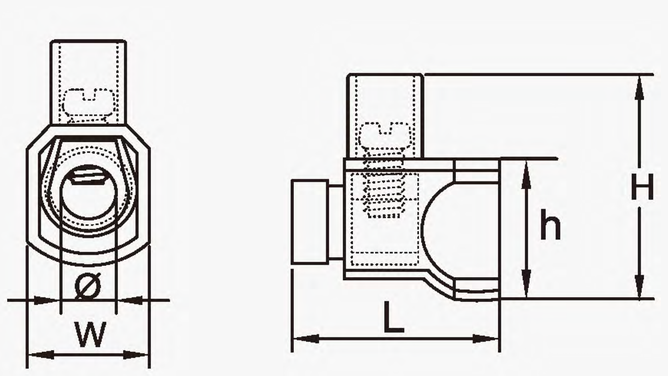

SP015



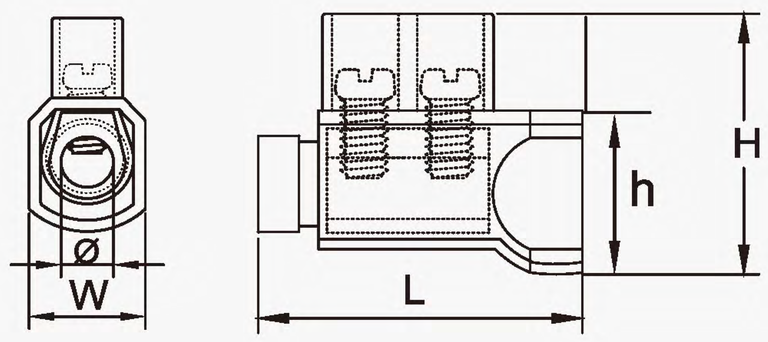

Single & Double Screws Connector<PC>

Working Temperature: –35℃ To 120℃

Color: Transparent ○ ● ● ●

Item No.	Wire Range	Amp	Volt	L	W	H	h	Ø	Screw Size	PCS/BAGS /CTN	PCS/JARS /CTN
				mm							
SP014-01	2×6mm²	32A	450V	20.0	12.0	22.5	14.0	5.7	M4.0	5000	2500
SP015-01	2×6mm²	32A	450V	27.0	12.0	22.5	14.0	5.7	M4.0	2000	1250


● Available with PP housing material, Brass plated steel screws.

* Screw Type： Philips or Square


*

Double Screws Connector
Conductor: Brass
Screws: Steel, Zinc Plated



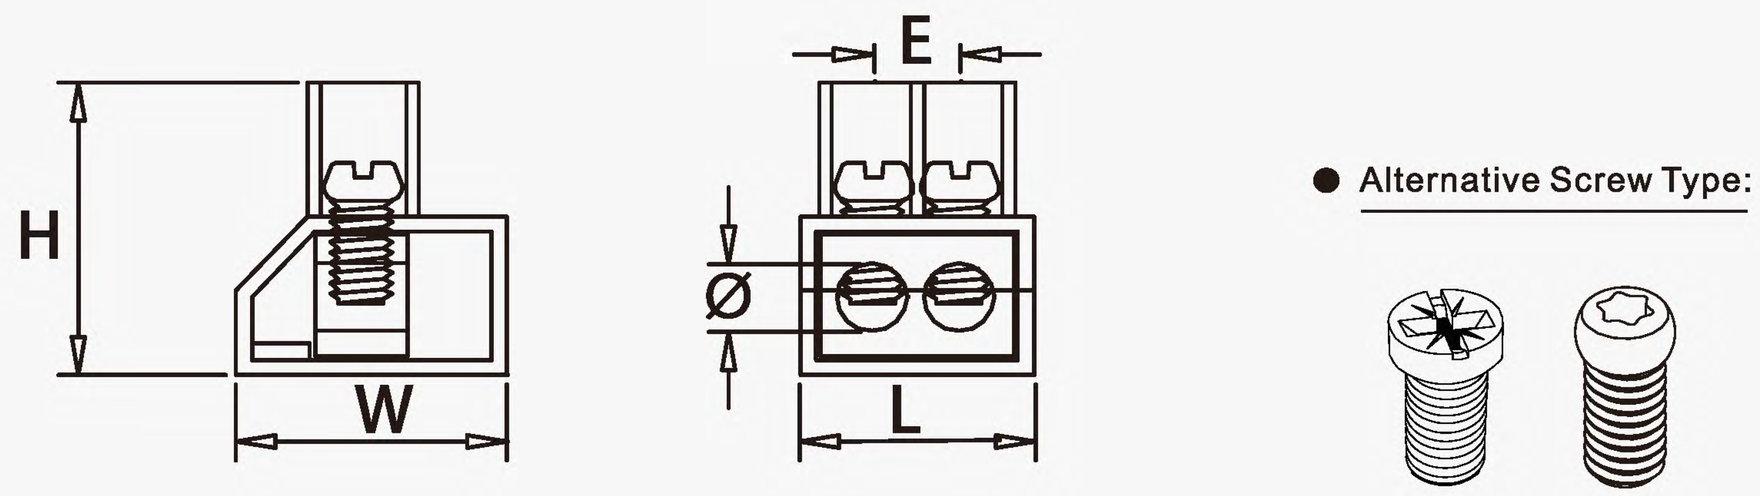

● Alternative Screw Type:



2 Poles Screw Connector <PC>
Working Temperature:–35℃ To 120℃
Color: Transparent
Tin Plated Brass Conductor


Item No.	Wire Range	Volt / Pole	L	W	H	E	Ø	Screw Size	PCS/BAGS /CTN	Screw Type
			mm							
SP016-01	10mm^2	400V/2P	14.6	17.0	19.1	5.5	4.5	M4.0	2000	Posidriv
SP016-02	10mm^2	400V/2P	14.6	17.0	19.1	5.5	4.5	M4.0	2000	Torx

Brass Bar Connector

Conductor: Brass

Screws: Steel, Zinc Plated



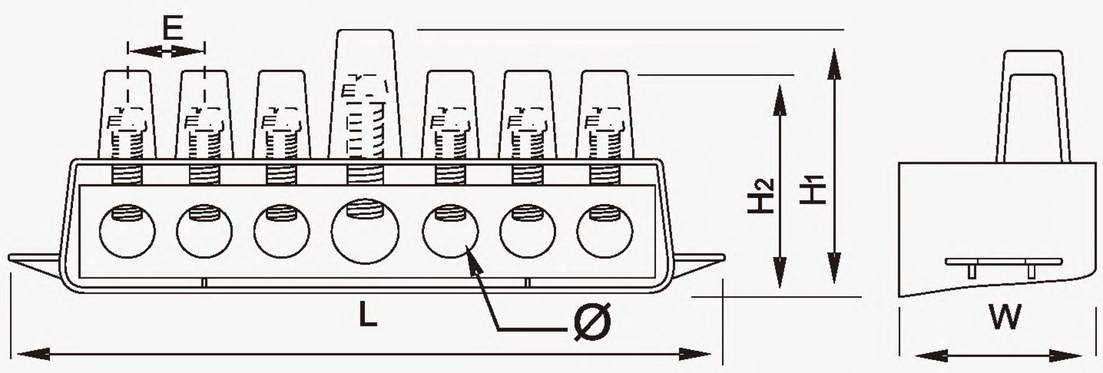

Insulative Brass Bar <PC>

Working Temperature: –35℃ To 120℃

Color: Transparent

Item No.	Spec	L	H1	H2	W	E	Ø	Screw Size	PCS/CTN
	hole qty×dia	mm							
SP036-01	4×16^2	53.6	21.0	21.0	22.5	9.0	5.1	M5.0	100
SP036-02	$1\times25^2+6\times16^2$	84.5	24.2	24.2	25.5	9.0	6.0	M5.0	80
SP036-03	$1\times15^2+6\times35^2$	109.0	42.0	33.8	34.2	12.6	8.3	M8.0	50

HS GROUP

UNIPOLAR TERMINAL BLOCKS


HS GROUP


8 Poles Unipolar Terminal Blocks

Conductor: Brass

Screws: Brass



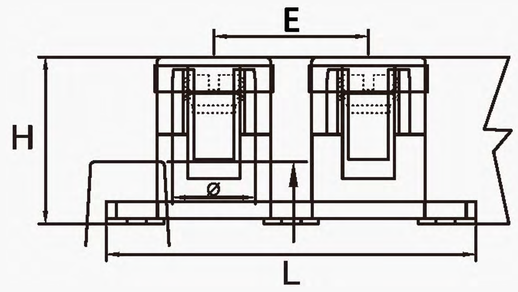

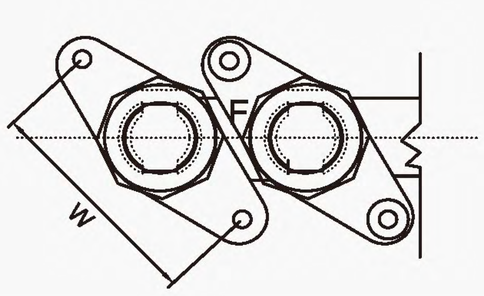

8 × 1 Terminal Blocks <PA66>

Working Temperature: –30℃ To 110℃


Color:

Item No.	Wire Range	Volt	Blocks	L	W	H	E	Ø	Screw Size	PCS/CTN
				mm						
SP012-01	16mm²	450V	8	173.0	26.4	24.0	21.0	5	M8.0	200
SP012-02	25mm²	450V	8	206.0	31.0	27.5	25.0	6	M9.0	100
SP012-03	35mm²	450V	8	250.0	41.5	33.0	30.0	8	M12.0	80
SP012-04	50mm²	450V	8	260.0	41.5	35.5	31.5	8.5	M14.0	50
SP012-05	70mm²	450V	8	272.0	42.0	38.0	33.0	9	M14.0	50

10 Poles Unipolar Terminal Blocks

Conductor: Brass

Screws: Brass

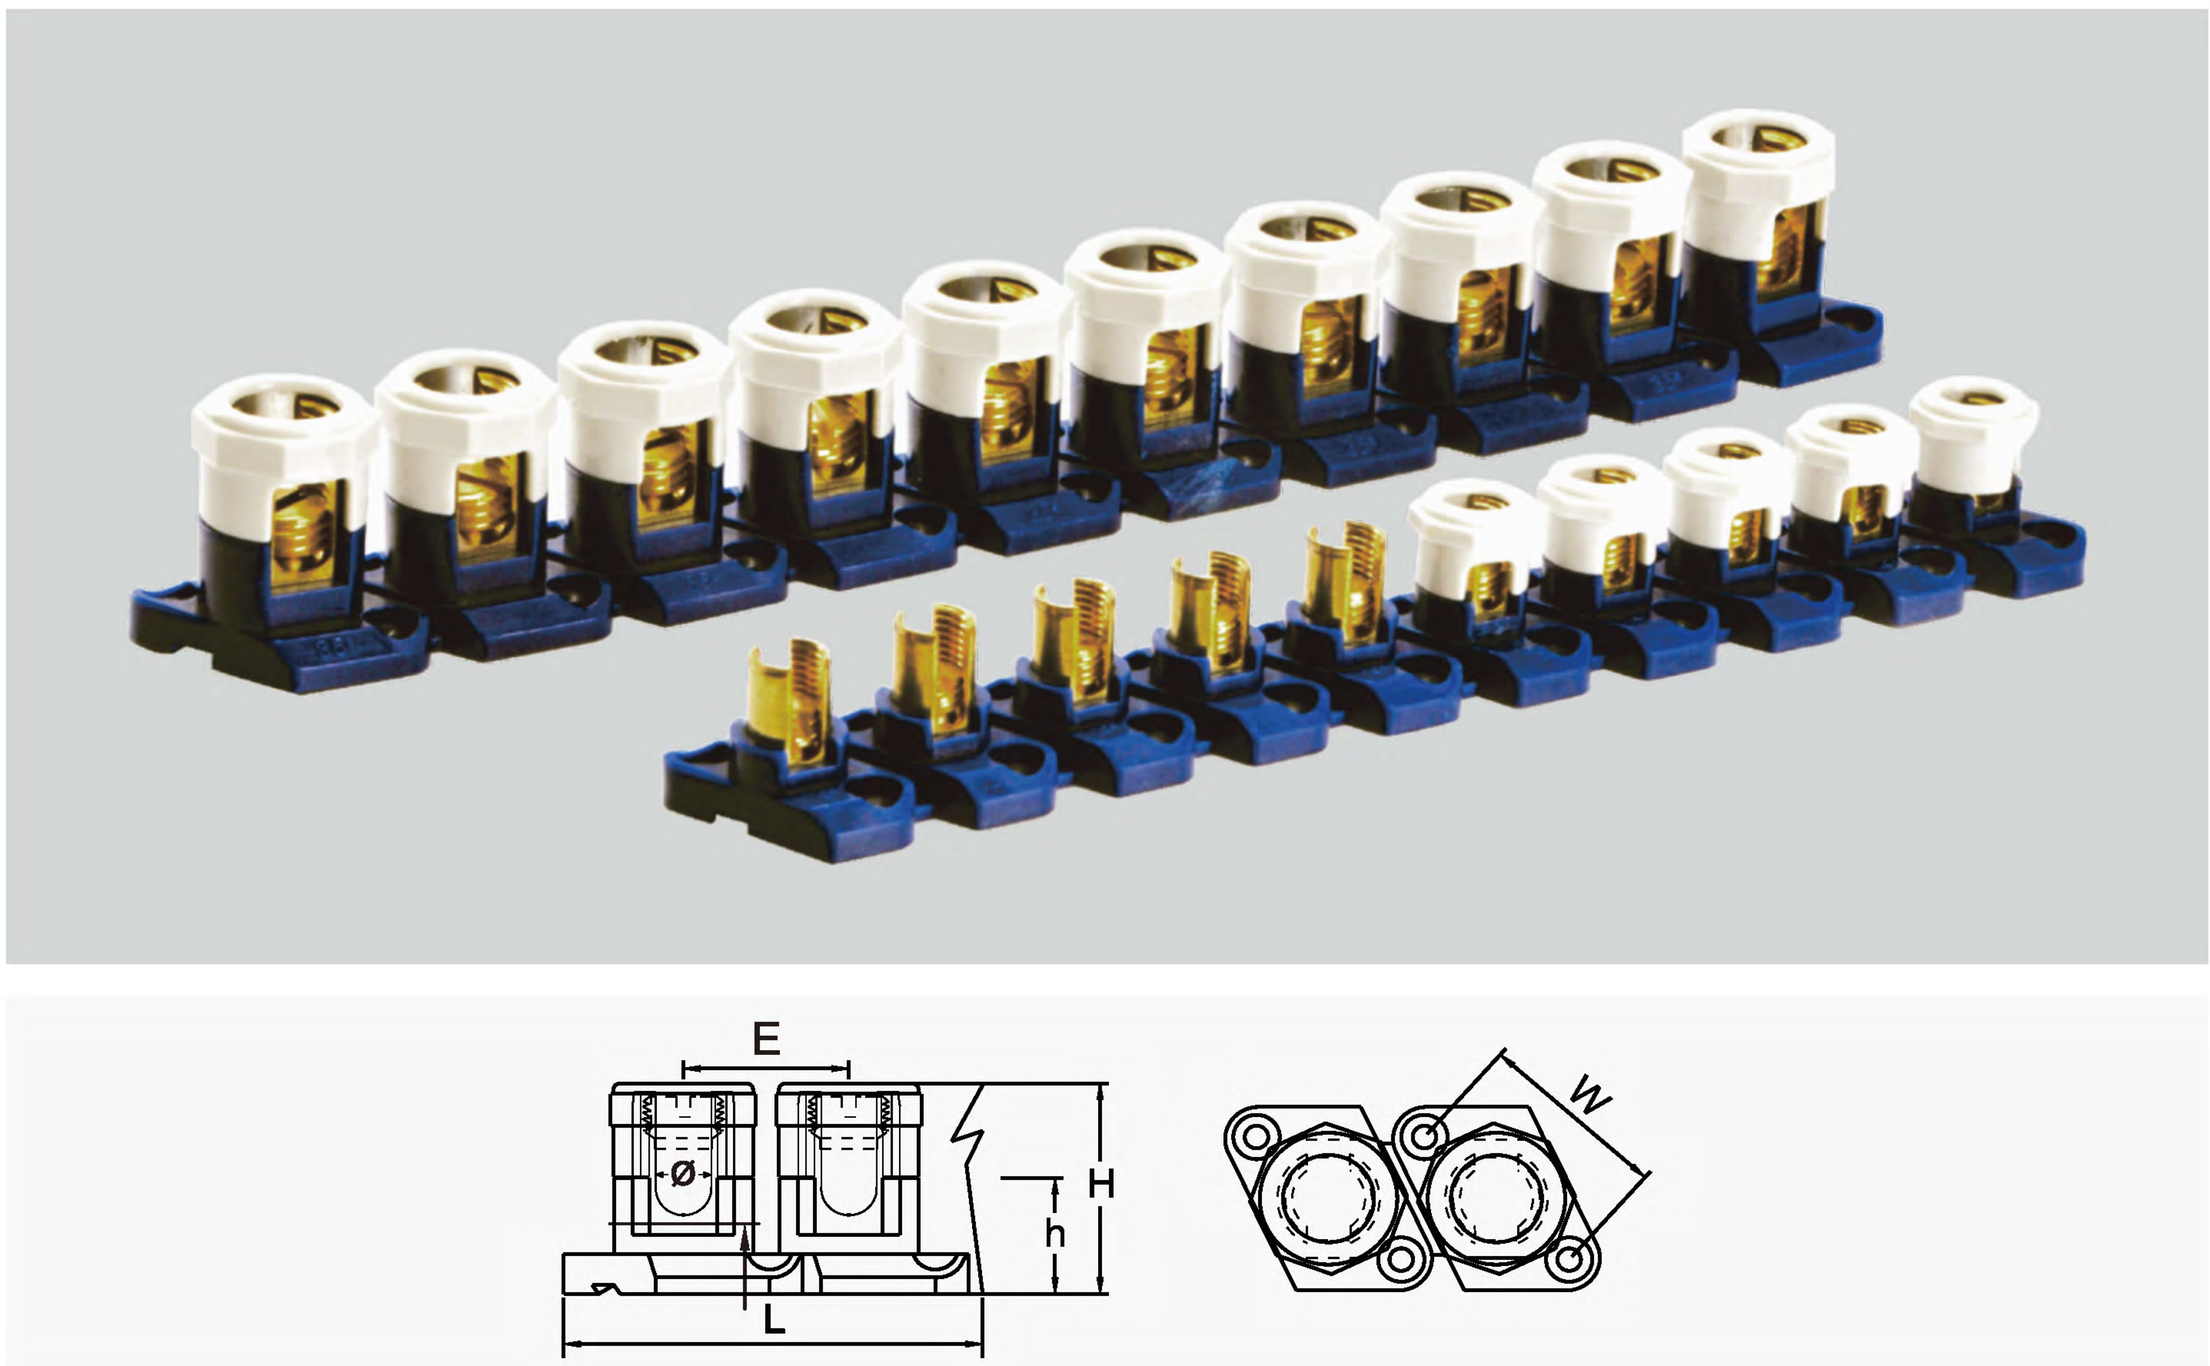

10 × 1 Terminal Blocks <PA66>

Working Temperature: –30℃ To 110℃

Color:

Item No.	Wire Range	Volt	Blocks	L	W	H	E	Ø	Screw Size	PCS/CTN
				mm						
SP012-20	6mm²	450V	10	162.0	20.3	21.0	15.5	3	M5.0	400
SP012-21	10mm²	450V	10	198.5	22.0	23.7	19.5	4	M8.0	160
SP012-22	16mm²	450V	10	211.0	23.5	26.0	20.5	5	M9.0	140
SP012-23	25mm²	450V	10	222.0	25.0	29.2	21.3	7	M10.0	120
SP012-24	35mm²	450V	10	260.0	28.5	33.5	25.0	8	M12.0	80

HS GROUP


JUNCTION CONNECTOR

Junction Connector

Conductor: Brass

Screws: Brass, Brass Plated



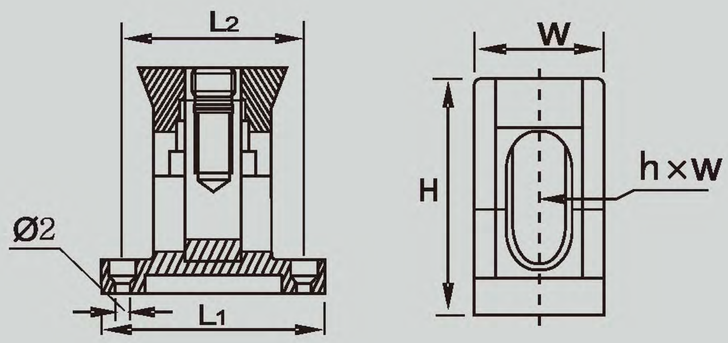


1 × 1 Junction Connector <PA66>

Working Temperature: –40℃ To 110℃

Color: ● ◑ ○

Item No.	Wire Range	Volt	L1	L2	W	H	h×w	Ø2	Screw Size	PCS/CTN
			mm							
SP026-01	16mm²	380V	41.0	31.5	17.0	32.0	14.5×4.8	4.3	M8	1000
SP026-02	25mm²	380V	47.2	37.5	20.8	37.7	17×6.8	4.3	M10	600
SP026-03	35mm²	380V	54.8	44.5	24.4	42.4	19×8.4	4.3	M12	500
SP026-04	50mm²	380V	65.0	54.0	27.0	48.5	22×9.3	5.0	M14	300
SP026-05	70mm²	380V	66.8	56.0	29.0	52.5	25×10.5	5.0	M16	200
SP026-06	95mm²	380V	71.0	60.0	33.5	56.7	29×12.6	5.0	M18	160
SP026-07	120mm²	380V	73.4	62.0	35.8	61.0	33×13.8	5.0	M20	120



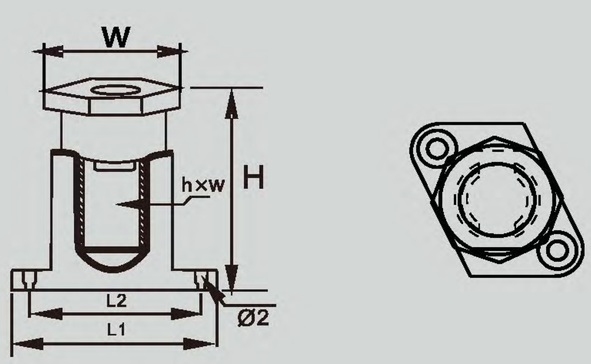

1 × 1 Junction Connector <PA66>

Working Temperature: –40℃ To 110℃

Color: ○ ● ◑

Item No.	Wire Range	Volt	L1	L2	W	H	h×w	Ø2	PCS/CTN
			mm						
SP027-01	50mm²	500V	49.0	33.0	31.5	60.0	20×10	3.0	300
SP027-02	70mm²	500V	50.0	42.0	37.8	70.0	25×12	3.0	300
SP027-03	100mm²	500V	70.0	56.0	44.8	83.0	26×14.5	4.5	100
SP027-04	160mm²	500V	105.0	82.0	64.4	110.0	33×20	4.5	30